

ISO/IEC 24727 for secure mobile web applications

Jan Eichholz¹ · Detlef Houdeau² · Detlef Hühnlein³ · Manuel Bach⁴

¹Giesecke & Devrient GmbH, jan.eichholz@gi-de.com

²Infineon Technologies AG, detlef.houdeau@infineon.com

³secunet Security Networks AG, detlef.huehnlein@secunet.com

⁴Bundesamt für Sicherheit in der Informationstechnik, manuel.bach@bsi.bund.de

Abstract: While the ISO/IEC 24727 series of standards [ISO24727] initially were meant to define architectures and application programming interfaces for electronic identity cards (eID) only, it has become clear in the mean time that the web service based architecture is powerful enough to serve arbitrary web applications and security tokens. As there are already many initiatives around the globe (e.g. in the USA, Australia and Europe) which are about to use this standard in major eID-projects, it may be expected, that this standard will provide a major contribution for global eID interoperability and will become widely adopted in near future. On the other hand there is an ever increasing trend for mobility and the ubiquitous use of portable devices as well as first national eID-projects, which support mobile devices such as PDAs, Netbooks and mobile phones. Therefore it is natural to investigate how ISO/IEC 24727 may be used with mobile devices. The present contribution provides a brief overview of this standard and discusses different options for using this standard to develop secure mobile web applications. Furthermore it emphasizes the interrelationships between secure tokens, mobile devices and internet-based e-government services.

1 Introduction

Against the background of the US Government Smart Card Interoperability Specification [NIST-GSCIS] and the activities around the Personal Identity Verification (PIV) program [NIST-PIV] the National Institute of Standards and Technology (NIST) initiated the development of the ISO/IEC 24727 series of standards (cf. [ISO24727], [NIST-SMP]) which defines architectures and application programming interfaces for electronic identity cards (eID). This standard will also be adopted by the Australian Government (cf. [AGIMO-AGSF]) and it forms the basis of the European Citizen Card Application Interface specification [CEN15480] and the German eCard-API-Framework [BSI-TR03112]. Therefore it may be expected, that ISO/IEC 24727 will play a major role in global eID interoperability and will become widely adopted in near future, as it captures government employee (e.g. in the U.S., PIV) as well as eHealth and other eID-based citizen services (e.g. Australia and Europe).

On the other hand there is an ever increasing trend for mobility and the ubiquitous use of portable devices (cf. [WCIS], [MC07]) and first national eID-projects are supporting portable devices (cf. [A-SIT-ACC], [B-WPKI-F]). Therefore it is natural to investigate how ISO/IEC 24727 may be used with mobile devices.

The present contribution provides in Section 2 a brief overview of the ISO/IEC 24727 architecture and discusses in Section 3 different options for using this standard in a mobile environment. Section 4 will provide a brief overview about the status of major eID-projects in Europe and Section 5 summarizes the main aspects of the present contribution and draws conclusions.

2 ISO/IEC 24727 in a nutshell

The architecture defined in Part 1 of [ISO24727] assumes that a Client Application uses the functionality of cryptographic tokens using the *Service Access Interface* defined in Part 3 of the standard series.

This interface comprises generic functions which allow to establish (cryptographically protected) connections to card-applications, manage those card-applications, store and retrieve data, perform cryptographic operations, manage the related key material (so called Differential-Identities (DID)) and manage access rights for data, keys and services provided by card-applications.

The Service Access Layer (SAL) maps the generic requests at the Service Access Interface to APDUs of the *Generic Card Interface* defined in Part 2, which allows a subset of the commands and options defined in [ISO7816] (Part 4, 8 and 9). If the cryptographic token does not support those standard-commands directly they may be translated by the Generic Card Layer before they are sent to the Interface Device (IFD) Layer using the Transmit-command, which is – as other IFD-related commands in the IFD-API – defined in Part 4 of [ISO24727].

Furthermore there is a “dispatcher”, which redirects web service requests to remote software stacks and establishes trusted channels e.g. using [RFC4346], if required. The dispatcher may support different web service bindings, such as [SOAP-v1.1] or [PAOS-v1.1].

The ISO/IEC 24727 architecture is extensible in two ways. First it allows the execution of arbitrary card-application services using the SAL-functions `ExecuteAction` and `CardApplicationServiceDescribe`. Second it supports arbitrary cryptographic (authentication) protocols because all DID-related functions have generic parameters, which are of an “open type”, which is protocol dependent. We will return to the second alternative in Section 3.2 when we sketch such a “protocol” tailored for mobile devices.

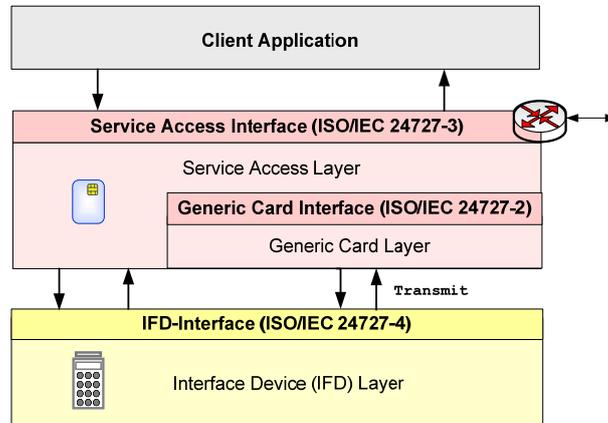


Figure 1: ISO/IEC 24727 Architecture

3 Using ISO/IEC 24727 with mobile devices

Depending on the use case and the capabilities of the mobile device there are various possible integration scenarios. Among those we will focus on two cases, which seem to cover a large proportion of currently available mobile devices:

- Cell phones with support for Java™ Mobile Edition (JME) (see Section 3.1) and
- other devices within a Mobile Signature Services (MSS) based architecture (see Section 3.2).

3.1 Java™ Micro Edition based solution

The Java™ Micro Edition (JME) is the dominating open platform for cell phones. Since everything has started in the year 2000 with the definition of the Mobile Information Device Profile (MIDP) [JSR271] the platform has grown over the years and is nowadays covering a wide variety of functionality. The basic stack is defined within the Mobile Service Architecture (MSA) [JSR248] and the Connected Limited Device Configuration (CLDC) [JSR139]. Additionally, a couple of additional Java Specification Requests (JSR's) are adding specific functionality to the basic platform. In the context of eID, the following JSR's are especially important:

- JSR 177 (Security and Trust Service, [JSR177]) is defining the interface to an embedded security element (e.g. SIM),
- JSR 257 (Contactless Communication API, [JSR257]) defines the interfaces for contactless communication (RFID, NFC) and
- JSR 279 (Service Connection API for Java™ ME, [JSR279]) offers the functionality to use and offer web services on a mobile device.

Figure 2 shows the interaction of the different software components with the security element (e.g. SIM card), the eService and an eID token.

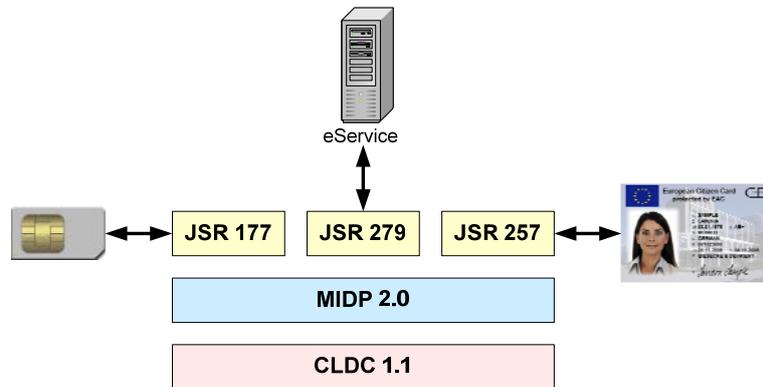


Figure 2: Java™ Micro Edition based Architecture

In an ISO/IEC 24727 environment, the eService will use the standardized web service interfaces to communicate with the mobile device. To support complex protocols, like the General Authentication Procedure defined in [BSI-TR3110], the mobile device should offer the Service Access Interface and the IFD-Interface as web service. In the future, the goal should be to define a JSR, which is adding the ISO/IEC 24727 interfaces to the JME platform. In the meantime, a client application on the device (MIDlet), which is based on the above listed JSR's, can add the necessary web services by its own.

3.2 Mobile Signature Service based solution

In this case the integration will not take place within the mobile device but rather in the Service Access Layer (SAL) of the Application Provider (AP). This SAL has a “virtual card-application” embedded, which allows to communicate with a Mobile Signature Service Provider (MSSP) using the messages defined in [ETSI-102204]. For this purpose there will be an MSS-specific ISO/IEC 24727-protocol, in which the (keys of the) mobile users are represented as Differential-Identities.

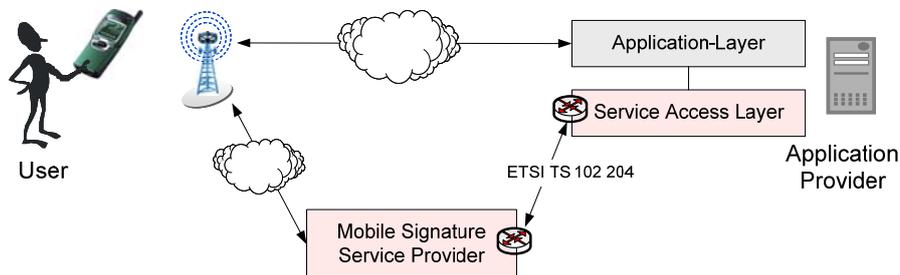


Figure 3: System architecture for MSS-based solution

In the presentation we will sketch how the main functions of [ISO24727] Part 3 map to functions defined in [ETSI-102204]¹.

4 Status on Secure Token, example European Citizen Card

8 of 27 EU member states have electronic eID cards until end of CY'08 in use, with Spain (2006), Portugal (2007); Italy (2006), Belgium (2005), Austria (2004), Finland (2002), Sweden (2005) and Estonia (2004). All eID programs are based on 2-factor authentications. Since 2004 there are ongoing standardization efforts to develop [ISO24727] and the closely related European Citizen Card standard in order to normalize identification, authentication and signing with security tokens, such as eID cards. In addition to the standard developments there are concrete plans by some EU member states, like France (for 2009), Germany (for 2010) and Poland (for 2011), who will implement this standard in the upcoming national eID-card programs. Flanking to this activity the EU Commission has started in June 2008 a pan-European interoperability program, to realize eID-interoperability across borders² and it may be expected that ISO/IEC 24727 and the closely related European Citizen Card specifications will play a central role in this project.

5 Conclusion

In the current paper we briefly recalled the ISO/IEC 24727 architecture [ISO24727] and sketched two possibilities how this software stack may be used with mobile devices, which either support the Java™ Mobile Edition (JME) platform (see Section 3.1) or the Mobile Signature Services interfaces (see Section 3.2). While the ISO/IEC 24727 interfaces can be easily supported in both cases, the JME-based variant seems to be especially interesting for future developments, as it does not require a special provider infrastructure and may support a broader variety of NFC-related use cases in the future.

References

- [AGIMO-AGSF] Australian Government Information Management Office (AGIMO): *Australian Government Smartcard Framework*, Phase 2 – Version 0.12, Standards and Model Specification – Part c, March 2007, http://www.agimo.gov.au/_data/assets/pdf_file/0008/56249/Standards_and_Model_Specification_-_Part_c_-_Version_0.12.pdf
- [A-SIT-ACC] A-SIT: *The Austrian Citizen Card*, Overview of Version 1.2.0, May 14th 2004, <http://www.buergerkarte.at/konzept/securitylayer/spezifikation/20040514/Index.en.html>

¹ Note that a similar mapping could be defined for other existing architectures and interfaces, as used for the Austrian Citizen Card [A-SIT-ACC] for example.

² See <http://www.eid-stork.eu/>.

- [BSI-TR3110] BSI: *Advanced Security Mechanism for Machine Readable Travel Documents – Extended Access Control (EAC)*, Technical Directive of the Federal Office for Information Security Nr. 03110, BSI TR-03110, Version 2.0 – Public Beta 3, 2007
- [BSI-TR03112] BSI: *eCard-API-Framework*, Technical Directive of the Federal Office for Information Security Nr. 03112, BSI TR-03112, Version 1.0, 2008, <http://www.bsi.bund.de/literat/tr/tr03112/index.htm>
- [B-WPKI-F] Baltic WPKI Forum: *Wiki of the Baltic WPKI Forum*, <http://wpki.eu>
- [CEN15480] CEN: *Identification card systems – European Citizen Card*, CEN TS 15480 (Part 1-4), 2007
- [ETSI-102204] ETSI: *Mobile Signature Service - Web Service Interface*, Technical Specification TS 102 204 V1.1.4, via http://portal.etsi.org/docbox/EC_Files/EC_Files/ts_102204v010104p.pdf
- [ISO7816] ISO/IEC: *Identification cards – Integrated circuit cards*, ISO/IEC 7816 (Part 1-13 & 15)
- [ISO24727] ISO/IEC: *Identification cards – Integrated circuit cards programming interfaces*, ISO/IEC 24727 (Part 1-6)
- [JSR139] JCP: *Connected Limited Device Configuration 1.1*, Java Specification Request (JSR) 139, <http://www.jcp.org/en/jsr/detail?id=139>
- [JSR177] JCP: *Security and Trust Services API for J2ME™*, Java Specification Request (JSR) 177, <http://www.jcp.org/en/jsr/detail?id=177>
- [JSR248] JCP: *Mobile Service Architecture*, Java Specification Request (JSR) 248, <http://www.jcp.org/en/jsr/detail?id=248>
- [JSR257] JCP: *Contactless Communication API*, Java Specification Request (JSR) 257 <http://www.jcp.org/en/jsr/detail?id=257>
- [JSR271] JCP: *Mobile Information Device Profile 3*, Java Specification Request (JSR) 271, <http://www.jcp.org/en/jsr/detail?id=271>
- [JSR279] JCP: *Service Connection API for Java™ ME*, Java Specification Request (JSR) 279, <http://www.jcp.org/en/jsr/detail?id=279>
- [MC07] Mobileconnect: *Study: Mobile data revenues will increase to more than 200 Billion \$US in 2011, in German*, <http://www.mobileconnect.ch/de/2007/03/05/studie-mobile-datenumsatze-steigen-auf-uber-200-milliarden-us-in-2011/>
- [NIST-GSCIS] NIST: *Government Smart Card Interoperability Specification*, Version 2.1., July 2003, <http://csrc.nist.gov/publications/nistir/nistir-6887.pdf>
- [NIST-PIV] NIST: *Personal Identity Verification (PIV) of Federal Employees and Contractors*, FIPS PUB 201-1, March 2006, <http://csrc.nist.gov/publications/fips/fips201-1/FIPS-201-1-chng1.pdf>
- [NIST-SMP] NIST: *Standard and Metrics Project*, http://www.itl.nist.gov/ITLPrograms/IDMS/external/standards_metrics.html
- [PAOS-v1.1] Liberty Alliance Project: *Liberty Reverse HTTP Binding for SOAP Specification*, Version v1.1, via <http://www.projectliberty.org/liberty/content/download/1219/7957/file/liberty-paos-v1.1.pdf>
- [RFC4346] E. Rescorla, T. Dierks: *The Transport Layer Security (TLS) Protocol – Version 1.1*, RFC 4346, April 2006, <http://www.ietf.org/rfc/rfc4346.txt>
- [SOAP-v1.1] W3C Note: *Simple Object Access Protocol (SOAP) 1.1*, 08 May 2000, via <http://www.w3.org/TR/2000/NOTE-SOAP-20000508>
- [WCIS] Informa Telecoms & Media: *World Cellular Information Service*, <http://www.wcisdata.com/>