Document Object Model (DOM) Level 2 Specification

Version 1.0

W3C Working Draft *23 September, 1999*

This version:
http://www.w3.org/TR/1999/WD-DOM-Level-2-19990923
(PostScript file, PDF file, plain text, ZIP file)
Latest version:
http://www.w3.org/TR/WD-DOM-Level-2
Previous versions:
http://www.w3.org/TR/1999/WD-DOM-Level-2-9990719
http://www.w3.org/TR/1999/WD-DOM-Level-2-9990304

Editors:
Lauren Wood, *SoftQuad Software Inc., chair*
Arnaud Le Hors, *W3C, staff contact*
Vidur Apparao, *Netscape Communications Corporation*
Laurence Cable, *Sun*
Mike Champion, *Arbortext and Software AG*
Joe Kesselman, *IBM*
Philippe Le Hégaret, *W3C*
Tom Pixley, *Netscape Communications Corporation*
Jonathan Robie, *Texcel Research and Software AG*
Peter Sharpe, *SoftQuad Software Inc.*
Chris Wilson, *Microsoft*

Copyright © 1999 W3C® (MIT, INRIA, Keio), All Rights Reserved. W3C liability, trademark, document use and software licensing rules apply.

Status of this document

This is a W3C Working Draft for review by W3C members and other interested parties. With the publication of this draft, the DOM Level 2 specification enters last call. The last call period will end on October 8, 1999. Comments on this document are invited and are to be sent to the public mailing list www-dom@w3.org. An archive is available at http://lists.w3.org/Archives/Public/www-dom/.

Comments received during the last call period will be addressed by the Working Group which will then release an updated draft. Comments from implementors will then be awaited and will determine whether this specification can be submitted for Proposed Recommendation.

While this document is in last call, it is still a draft document which may be updated, replaced or obsoleted by other documents at any time. It is therefore inappropriate to use it as reference material or to cite it as other than "work in progress". This is work in progress and does not imply endorsement by, or the consensus of, either W3C or members of the DOM Working Group.

This document has been produced as part of the W3C DOM Activity. The authors of this document are the DOM WG members. Different modules of the Document Object Model have different editors.

Abstract

This specification defines the Document Object Model Level 2, a platform- and language-neutral interface that allows programs and scripts to dynamically access and update the content, structure and style of documents. The Document Object Model Level 2 builds on the Document Object Model Level 1.

The DOM Level 2 is made of a set of core interfaces to create and manipulate the structure and contents of a document and a set of optional modules. These modules contain specialized interfaces dedicated to XML, HTML, an abstract view, generic stylesheets, Cascading Style Sheets, Events, traversing the document structure, and a Range object.

Table of contents

- Expanded Table of Contents [p.5]
- Copyright Notice [p.9]
- What is the Document Object Model? [p.11]

- Chapter 1: Document Object Model Core [p.17]
- Chapter 2: Document Object Model HTML [p.67]
- Chapter 3: Document Object Model Views [p.117]
- Chapter 4: Document Object Model StyleSheets [p.119]
- Chapter 5: Document Object Model CSS [p.125]
- Chapter 6: Document Object Model Events [p.209]
- Chapter 7: Document Object Model Traversal [p.245]
- Chapter 8: Document Object Model Range [p.265]

- Appendix A: Changes [p.287]
- Appendix B: IDL Definitions [p.289]
- Appendix C: Java Language Binding [p.331]
- Appendix D: ECMA Script Language Binding [p.385]
- Acknowledgments [p.431]
- Glossary [p.433]
- References [p.439]

- Objects Index [p.441]
- Index [p.445]

Table of contents

Expanded Table of Contents

- Expanded Table of Contents [p.5]
- Copyright Notice [p.9]
- What is the Document Object Model? [p.11]
  - Introduction [p.11]
  - What the Document Object Model is [p.11]
  - What the Document Object Model is not [p.13]
  - Where the Document Object Model came from [p.13]
  - Entities and the DOM Core [p.13]
  - Compliance [p.14]
  - DOM Interfaces and DOM Implementations [p.14]

- Chapter 1: Document Object Model Core [p.17]
  - 1.1. Overview of the DOM Core Interfaces [p.17]
    - 1.1.1. The DOM Structure Model [p.17]
    - 1.1.2. Memory Management [p.18]
    - 1.1.3. Naming Conventions [p.18]
    - 1.1.4. Inheritance vs Flattened Views of the API [p.19]
    - 1.1.5. The DOMString type [p.19]
    - 1.1.6. Case sensitivity in the DOM [p.20]
    - 1.1.7. XML Namespaces [p.20]
  - 1.2. Fundamental Interfaces [p.20]
  - 1.3. Extended Interfaces [p.62]
- Chapter 2: Document Object Model HTML [p.67]
  - 2.1. Introduction [p.67]
  - 2.2. HTML Application of Core DOM [p.68]
    - 2.2.1. Naming Conventions [p.68]
  - 2.3. Miscellaneous Object Definitions [p.68]
  - 2.4. Objects related to HTML documents [p.70]
  - 2.5. HTML Elements [p.73]
    - 2.5.1. Property Attributes [p.73]
    - 2.5.2. Naming Exceptions [p.74]
    - 2.5.3. Exposing Element Type Names (tagName) [p.74]
    - 2.5.4. The HTMLElement interface [p.74]
    - 2.5.5. Object definitions [p.75]
- Chapter 3: Document Object Model Views [p.117]
  - 3.1. Introduction [p.117]
  - 3.2. Interfaces [p.117]
- Chapter 4: Document Object Model StyleSheets [p.119]
  - 4.1. Introduction [p.119]
  - 4.2. Style Sheet Interfaces [p.119]
  - 4.3. Document Extensions [p.123]

- 4.4. Association between a style sheet and a document. [p.124]

- Chapter 5: Document Object Model CSS [p.125]
  - 5.1. Overview of the DOM Level 2 CSS Interfaces [p.125]
  - 5.2. CSS Fundamental Interfaces [p.125]
    - 5.2.1. Override and computed style sheet [p.147]
    - 5.2.2. Style sheet creation [p.149]
  - 5.3. CSS Extended Interfaces [p.149]
  - 5.4. HTML Extension [p.208]
    - 5.4.1. HTMLElement inline style [p.208]
  - 5.5. Unresolved Issues [p.208]
- Chapter 6: Document Object Model Events [p.209]
  - 6.1. Overview of the DOM Level 2 Event Model [p.209]
    - 6.1.1. Terminology [p.209]
  - 6.2. Description of event flow [p.210]
    - 6.2.1. Basic event flow [p.210]
    - 6.2.2. Event Capture [p.210]
    - 6.2.3. Event bubbling [p.211]
    - 6.2.4. Event cancelation [p.211]
  - 6.3. Event listener registration [p.211]
    - 6.3.1. Event registration interfaces [p.211]
    - 6.3.2. Interaction with HTML 4.0 event listeners [p.214]
  - 6.4. Event interface [p.215]
  - 6.5. DocumentEvent interface [p.217]
  - 6.6. Event set definitions [p.218]
    - 6.6.1. User Interface event types [p.218]
    - 6.6.2. Mouse event types [p.221]
    - 6.6.3. Key event types [p.225]
    - 6.6.4. Mutation event types [p.239]
    - 6.6.5. HTML event types [p.242]
- Chapter 7: Document Object Model Traversal [p.245]
  - 7.1. Overview [p.245]
    - 7.1.1. Iterators [p.245]
    - 7.1.2. Filters [p.248]
    - 7.1.3. TreeWalker [p.250]
  - 7.2. Formal Interface Definition [p.252]
- Chapter 8: Document Object Model Range [p.265]
  - 8.1. Introduction [p.265]
  - 8.2. Definitions and Notation [p.265]
    - 8.2.1. Position [p.265]
    - 8.2.2. Selection and Partial Selection [p.267]
    - 8.2.3. Notation [p.267]
  - 8.3. Creating a Range [p.267]
  - 8.4. Changing a Range’s Position [p.268]

- 8.5. Comparing Range End-Points [p.269]
- 8.6. Deleting Content with a Range [p.270]
- 8.7. Extracting Content [p.270]
- 8.8. Cloning Content [p.271]
- 8.9. Inserting Content [p.271]
- 8.10. Surrounding Content [p.272]
- 8.11. Miscellaneous Members [p.272]
- 8.12. Range modification under document mutation [p.273]
  - 8.12.1. Insertions [p.273]
  - 8.12.2. Deletions [p.274]
- 8.13. Formal Description of the Range Interface [p.275]

- Appendix A: Changes [p.287]
  - A.1. Changes between DOM Level 1 and DOM Level 2 [p.287]
    - A.1.1. Changes to DOM Level 1 interfaces [p.287]
    - A.1.2. New interfaces [p.287]
- Appendix B: IDL Definitions [p.289]
  - B.1. Document Object Model Core [p.289]
  - B.2. Document Object Model HTML [p.294]
  - B.3. Document Object Model Views [p.303]
  - B.4. Document Object Model Stylesheets [p.303]
  - B.5. Document Object Model CSS [p.305]
  - B.6. Document Object Model Events [p.321]
  - B.7. Document Object Model Traversal [p.326]
  - B.8. Document Object Model Range [p.328]
- Appendix C: Java Language Binding [p.331]
  - C.1. Document Object Model Core [p.331]
  - C.2. Document Object Model HTML [p.337]
  - C.3. Document Object Model Views [p.355]
  - C.4. Document Object Model Stylesheets [p.356]
  - C.5. Document Object Model CSS [p.357]
  - C.6. Document Object Model Events [p.374]
  - C.7. Document Object Model Traversal [p.380]
  - C.8. Document Object Model Range [p.382]
- Appendix D: ECMA Script Language Binding [p.385]
  - D.1. Document Object Model Core [p.385]
  - D.2. Document Object Model HTML [p.391]
  - D.3. Document Object Model Views [p.410]
  - D.4. Document Object Model Stylesheets [p.410]
  - D.5. Document Object Model CSS [p.411]
  - D.6. Document Object Model Events [p.424]
  - D.7. Document Object Model Traversal [p.428]
  - D.8. Document Object Model Range [p.429]
- Acknowledgments [p.431]

- Glossary [p.433]
- References [p.439]
- Objects Index [p.441]
- Index [p.445]

Copyright Notice

Copyright © 1999 World Wide Web Consortium, (Massachusetts Institute of Technology, Institut National de Recherche en Informatique et en Automatique, Keio University). All Rights Reserved.

Documents on the W3C site are provided by the copyright holders under the following license. By obtaining, using and/or copying this document, or the W3C document from which this statement is linked, you agree that you have read, understood, and will comply with the following terms and conditions:

Permission to use, copy, and distribute the contents of this document, or the W3C document from which this statement is linked, in any medium for any purpose and without fee or royalty is hereby granted, provided that you include the following on *ALL* copies of the document, or portions thereof, that you use:

1. A link or URI to the original W3C document.
2. The pre-existing copyright notice of the original author, if it doesn't exist, a notice of the form: "Copyright © World Wide Web Consortium, (Massachusetts Institute of Technology, Institut National de Recherche en Informatique et en Automatique, Keio University). All Rights Reserved."
3. *If it exists*, the STATUS of the W3C document.

When space permits, inclusion of the full text of this **NOTICE** should be provided. In addition, credit shall be attributed to the copyright holders for any software, documents, or other items or products that you create pursuant to the implementation of the contents of this document, or any portion thereof.

No right to create modifications or derivatives is granted pursuant to this license.

THIS DOCUMENT IS PROVIDED "AS IS," AND COPYRIGHT HOLDERS MAKE NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR TITLE; THAT THE CONTENTS OF THE DOCUMENT ARE SUITABLE FOR ANY PURPOSE; NOR THAT THE IMPLEMENTATION OF SUCH CONTENTS WILL NOT INFRINGE ANY THIRD PARTY PATENTS, COPYRIGHTS, TRADEMARKS OR OTHER RIGHTS.

COPYRIGHT HOLDERS WILL NOT BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF ANY USE OF THE DOCUMENT OR THE PERFORMANCE OR IMPLEMENTATION OF THE CONTENTS THEREOF.

The name and trademarks of copyright holders may NOT be used in advertising or publicity pertaining to this document or its contents without specific, written prior permission. Title to copyright in this document will at all times remain with copyright holders.

Copyright Notice

What is the Document Object Model?

Editors
Jonathan Robie, Software AG

Introduction

The Document Object Model (DOM) is an application programming interface (API) for HTML and XML documents. It defines the logical structure of documents and the way a document is accessed and manipulated. In the DOM specification, the term "document" is used in the broad sense - increasingly, XML is being used as a way of representing many different kinds of information that may be stored in diverse systems, and much of this would traditionally be seen as data rather than as documents. Nevertheless, XML presents this data as documents, and the DOM may be used to manage this data.

With the Document Object Model, programmers can build documents, navigate their structure, and add, modify, or delete elements and content. Anything found in an HTML or XML document can be accessed, changed, deleted, or added using the Document Object Model, with a few exceptions - in particular, the DOM interfaces for the XML internal and external subsets have not yet been specified.

As a W3C specification, one important objective for the Document Object Model is to provide a standard programming interface that can be used in a wide variety of environments and applications. The DOM is designed to be used with any programming language. In order to provide a precise, language-independent specification of the DOM interfaces, we have chosen to define the specifications in OMG IDL, as defined in the CORBA 2.2 specification [CORBA]. In addition to the OMG IDL specification, we provide language bindings for Java and ECMAScript (an industry-standard scripting language based on JavaScript and JScript) [Java] [ECMAScript]. ***Note:*** *OMG IDL is used only as a language-independent and implementation-neutral way to specify interfaces. Various other IDLs could have been used. In general, IDLs are designed for specific computing environments. The Document Object Model can be implemented in any computing environment, and does not require the object binding runtimes generally associated with such IDLs.*

What the Document Object Model is

The DOM is a programming API for documents. It is based on an object structure that closely resembles the structure of the documents it models. For instance, consider this table, taken from an HTML document:

```
<TABLE>
<TBODY>
<TR>
<TD>Shady Grove</TD>
<TD>Aeolian</TD>
</TR>
<TR>
<TD>Over the River, Charlie</TD>
```

```
<TD>Dorian</TD>
</TR>
</TBODY>
</TABLE>
```

The DOM represents this table like this:

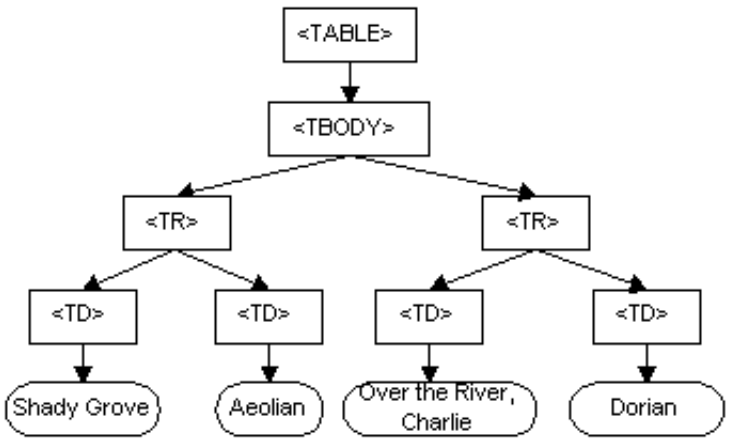

DOM representation of the example table

In the DOM, documents have a logical structure which is very much like a tree; to be more precise, it is like a "forest" or "grove", which can contain more than one tree. Each document contains zero or one doctype nodes, one root element node, and zero or more comments or processing instructions; the root element serves as the root of the element tree for the document. However, the DOM does not specify that documents must be *implemented* as a tree or a grove, nor does it specify how the relationships among objects be implemented. The DOM is a logical model that may be implemented in any convenient manner. In this specification, we use the term *structure model* to describe the tree-like representation of a document; we specifically avoid terms like "tree" or "grove" in order to avoid implying a particular implementation. One important property of DOM structure models is *structural isomorphism*: if any two Document Object Model implementations are used to create a representation of the same document, they will create the same structure model, in accordance with the XML Information Set [Infoset].

The name "Document Object Model" was chosen because it is an "object model" in the traditional object oriented design sense: documents are modeled using objects, and the model encompasses not only the structure of a document, but also the behavior of a document and the objects of which it is composed. In other words, the nodes in the above diagram do not represent a data structure, they represent objects, which have functions and identity. As an object model, the DOM identifies:

- the interfaces and objects used to represent and manipulate a document
- the semantics of these interfaces and objects - including both behavior and attributes
- the relationships and collaborations among these interfaces and objects

The structure of SGML documents has traditionally been represented by an abstract data model, not by an object model. In an abstract data model, the model is centered around the data. In object oriented programming languages, the data itself is encapsulated in objects that hide the data, protecting it from direct external manipulation. The functions associated with these objects determine how the objects may be manipulated, and they are part of the object model.

What the Document Object Model is not

This section is designed to give a more precise understanding of the DOM by distinguishing it from other systems that may seem to be like it.

- The Document Object Model is not a binary specification. DOM programs written in the same language will be source code compatible across platforms, but the DOM does not define any form of binary interoperability.
- The Document Object Model is not a way of persisting objects to XML or HTML. Instead of specifying how objects may be represented in XML, the DOM specifies how XML and HTML documents are represented as objects, so that they may be used in object oriented programs.
- The Document Object Model is not a set of data structures, it is an object model that specifies interfaces. Although this document contains diagrams showing parent/child relationships, these are logical relationships defined by the programming interfaces, not representations of any particular internal data structures.
- The Document Object Model does not define what information in a document is relevant or how information in a document is structured. For XML, this is specified by the W3C XML Information Set [Infoset]. The DOM is simply an API to this information set.
- The Document Object Model, despite its name, is not a competitor to the Component Object Model (COM). COM, like CORBA, is a language independent way to specify interfaces and objects; the DOM is a set of interfaces and objects designed for managing HTML and XML documents. The DOM may be implemented using language-independent systems like COM or CORBA; it may also be implemented using language-specific bindings like the Java or ECMAScript bindings specified in this document.

Where the Document Object Model came from

The DOM originated as a specification to allow JavaScript scripts and Java programs to be portable among Web browsers. "Dynamic HTML" was the immediate ancestor of the Document Object Model, and it was originally thought of largely in terms of browsers. However, when the DOM Working Group was formed at W3C, it was also joined by vendors in other domains, including HTML or XML editors and document repositories. Several of these vendors had worked with SGML before XML was developed; as a result, the DOM has been influenced by SGML Groves and the HyTime standard. Some of these vendors had also developed their own object models for documents in order to provide an API for SGML/XML editors or document repositories, and these object models have also influenced the DOM.

Entities and the DOM Core

In the fundamental DOM interfaces, there are no objects representing entities. Numeric character references, and references to the pre-defined entities in HTML and XML, are replaced by the single character that makes up the entity's replacement. For example, in:

```
<p>This is a dog &amp;amp; a cat</p>
```

the "&" will be replaced by the character "&", and the text in the P element will form a single continuous sequence of characters. Since numeric character references and pre-defined entities are not recognized as such in CDATA sections, or the SCRIPT and STYLE elements in HTML, they are not replaced by the single character they appear to refer to. If the example above were enclosed in a CDATA section, the "&" would not be replaced by "&"; neither would the <p> be recognized as a start tag. The representation of general entities, both internal and external, are defined within the extended (XML) interfaces of the Level 1 specification.

Note: When a DOM representation of a document is serialized as XML or HTML text, applications will need to check each character in text data to see if it needs to be escaped using a numeric or pre-defined entity. Failing to do so could result in invalid HTML or XML. Also, implementations should be aware of the fact that serialization into a character encoding ("charset") that does not fully cover ISO 10646 may fail if there are characters in markup or CDATA sections that are not present in the encoding.

Compliance

The Document Object Model level 2 consists of several modules: Core, HTML, Views, StyleSheets, CSS, Events, Traversal, and Range. The DOM Core represents the functionality used for XML documents, and also serves as the basis for DOM HTML.

A compliant implementation of the DOM must implement all of the fundamental interfaces in the Core chapter with the semantics as defined. Further, it must implement at least one of the HTML DOM and the extended (XML) interfaces with the semantics as defined. The other modules are optional.

DOM Interfaces and DOM Implementations

The DOM specifies interfaces which may be used to manage XML or HTML documents. It is important to realize that these interfaces are an abstraction - much like "abstract base classes" in C++, they are a means of specifying a way to access and manipulate an application's internal representation of a document. Interfaces do not imply a particular concrete implementation. Each DOM application is free to maintain documents in any convenient representation, as long as the interfaces shown in this specification are supported. Some DOM implementations will be existing programs that use the DOM interfaces to access software written long before the DOM specification existed. Therefore, the DOM is designed to avoid implementation dependencies; in particular,

1. Attributes defined in the IDL do not imply concrete objects which must have specific data members - in the language bindings, they are translated to a pair of get()/set() functions, not to a data member. Read-only attributes have only a get() function in the language bindings.

2. DOM applications may provide additional interfaces and objects not found in this specification and still be considered DOM compliant.
3. Because we specify interfaces and not the actual objects that are to be created, the DOM can not know what constructors to call for an implementation. In general, DOM users call the createXXX() methods on the Document class to create document structures, and DOM implementations create their own internal representations of these structures in their implementations of the createXXX() functions.

1. Document Object Model Core

Editors
Arnaud Le Hors, W3C
Mike Champion, ArborText (for DOM Level 1 from November 20, 1997)
Steve Byrne, JavaSoft (for DOM Level 1 until November 19, 1997)
Gavin Nicol, Inso EPS (for DOM Level 1)
Lauren Wood, SoftQuad, Inc. (for DOM Level 1)

1.1. Overview of the DOM Core Interfaces

This section defines a minimal set of objects and interfaces for accessing and manipulating document objects. The functionality specified in this section (the *Core* functionality) is sufficient to allow software developers and web script authors to access and manipulate parsed HTML and XML content inside conforming products. The DOM Core API also allows creation and population of a `Document` [p.25] object using only DOM API calls; loading a `Document` and saving it persistently is left to the product that implements the DOM API.

1.1.1. The DOM Structure Model

The DOM presents documents as a hierarchy of `Node` [p.34] objects that also implement other, more specialized interfaces. Some types of nodes may have child nodes of various types, and others are leaf nodes that cannot have anything below them in the document structure. The node types, and which node types they may have as children, are as follows:

- `Document` [p.25] -- `Element` [p.53] (maximum of one), `ProcessingInstruction` [p.66] , `Comment` [p.62] , `DocumentType` [p.63]
- `DocumentFragment` [p.24] -- `Element` [p.53] , `ProcessingInstruction` [p.66] , `Comment` [p.62] , `Text` [p.61] , `CDATASection` [p.62] , `EntityReference` [p.65]
- `DocumentType` [p.63] -- no children
- `EntityReference` [p.65] -- `Element` [p.53] , `ProcessingInstruction` [p.66] , `Comment` [p.62] , `Text` [p.61] , `CDATASection` [p.62] , `EntityReference`
- `Element` [p.53] -- `Element`, `Text` [p.61] , `Comment` [p.62] , `ProcessingInstruction` [p.66] , `CDATASection` [p.62] , `EntityReference` [p.65]
- `Attr` [p.51] -- `Text` [p.61] , `EntityReference` [p.65]
- `ProcessingInstruction` [p.66] -- no children
- `Comment` [p.62] -- no children
- `Text` [p.61] -- no children
- `CDATASection` [p.62] -- no children
- `Entity` [p.64] -- `Element` [p.53] , `ProcessingInstruction` [p.66] , `Comment` [p.62] , `Text` [p.61] , `CDATASection` [p.62] , `EntityReference` [p.65]
- `Notation` [p.64] -- no children

The DOM also specifies a `NodeList` [p.43] interface to handle ordered lists of `Node` [p.34] s, such as the children of a `Node`, or the elements returned by the `getElementsByTagName` method of the `Element` [p.53] interface, and also a `NamedNodeMap` [p.44] interface to handle unordered sets of nodes referenced by their name attribute, such as the attributes of an `Element`. `NodeList` and `NamedNodeMap` objects in the DOM are "live", that is, changes to the underlying document structure are reflected in all relevant `NodeList` and `NamedNodeMap` objects. For example, if a DOM user gets a `NodeList` object containing the children of an `Element`, then subsequently adds more children to that element (or removes children, or modifies them), those changes are automatically reflected in the `NodeList`, without further action on the user's part. Likewise, changes to a `Node` in the tree are reflected in all references to that `Node` in `NodeList` and `NamedNodeMap` objects.

Finally, the interfaces `Text` [p.61] , `Comment` [p.62] , and `CDATASection` [p.62] all inherit from the `CharacterData` [p.48] interface.

1.1.2. Memory Management

Most of the APIs defined by this specification are *interfaces* rather than classes. That means that an actual implementation need only expose methods with the defined names and specified operation, not actually implement classes that correspond directly to the interfaces. This allows the DOM APIs to be implemented as a thin veneer on top of legacy applications with their own data structures, or on top of newer applications with different class hierarchies. This also means that ordinary constructors (in the Java or C++ sense) cannot be used to create DOM objects, since the underlying objects to be constructed may have little relationship to the DOM interfaces. The conventional solution to this in object-oriented design is to define *factory* methods that create instances of objects that implement the various interfaces. Objects implementing some interface "X" are created by a "createX()" method on the `Document` [p.25] interface; this is because all DOM objects live in the context of a specific Document.

The DOM Level 2 API does *not* define a standard way to create `DOMImplementation` [p.22] objects; actual DOM implementations must provide some proprietary way of bootstrapping these DOM interfaces, and then all other objects can be built from there.

The Core DOM APIs are designed to be compatible with a wide range of languages, including both general-user scripting languages and the more challenging languages used mostly by professional programmers. Thus, the DOM APIs need to operate across a variety of memory management philosophies, from language platforms that do not expose memory management to the user at all, through those (notably Java) that provide explicit constructors but provide an automatic garbage collection mechanism to automatically reclaim unused memory, to those (especially C/C++) that generally require the programmer to explicitly allocate object memory, track where it is used, and explicitly free it for re-use. To ensure a consistent API across these platforms, the DOM does not address memory management issues at all, but instead leaves these for the implementation. Neither of the explicit language bindings devised by the DOM Working Group (for ECMAScript and Java) require any memory management methods, but DOM bindings for other languages (especially C or C++) may require such support. These extensions will be the responsibility of those adapting the DOM API to a specific language, not the DOM WG.

1.1.3. Naming Conventions

While it would be nice to have attribute and method names that are short, informative, internally consistent, and familiar to users of similar APIs, the names also should not clash with the names in legacy APIs supported by DOM implementations. Furthermore, both OMG IDL and `ECMAScript` have significant limitations in their ability to disambiguate names from different namespaces that makes it difficult to avoid naming conflicts with short, familiar names. So, DOM names tend to be long and quite descriptive in order to be unique across all environments.

The Working Group has also attempted to be internally consistent in its use of various terms, even though these may not be common distinctions in other APIs. For example, we use the method name "remove" when the method changes the structural model, and the method name "delete" when the method gets rid of something inside the structure model. The thing that is deleted is not returned. The thing that is removed may be returned, when it makes sense to return it.

1.1.4. Inheritance vs Flattened Views of the API

The DOM Core APIs present two somewhat different sets of interfaces to an XML/HTML document; one presenting an "object oriented" approach with a hierarchy of inheritance, and a "simplified" view that allows all manipulation to be done via the `Node` [p.34] interface without requiring casts (in Java and other C-like languages) or query interface calls in COM environments. These operations are fairly expensive in Java and COM, and the DOM may be used in performance-critical environments, so we allow significant functionality using just the `Node` interface. Because many other users will find the inheritance hierarchy easier to understand than the "everything is a `Node`" approach to the DOM, we also support the full higher-level interfaces for those who prefer a more object-oriented API.

In practice, this means that there is a certain amount of redundancy in the API. The Working Group considers the "inheritance" approach the primary view of the API, and the full set of functionality on `Node` [p.34] to be "extra" functionality that users may employ, but that does not eliminate the need for methods on other interfaces that an object-oriented analysis would dictate. (Of course, when the O-O analysis yields an attribute or method that is identical to one on the `Node` interface, we don’t specify a completely redundant one). Thus, even though there is a generic `nodeName` attribute on the `Node` interface, there is still a `tagName` attribute on the `Element` [p.53] interface; these two attributes must contain the same value, but the Working Group considers it worthwhile to support both, given the different constituencies the DOM API must satisfy.

1.1.5. The `DOMString` type

To ensure interoperability, the DOM specifies the following:

- **Type Definition *DOMString***

  A `DOMString` [p.19] is a sequence of 16-bit units.
  IDL Definition

```
typedef sequence<unsigned short> DOMString;
```

- Applications must encode `DOMString` [p.19] using UTF-16 (defined in Appendix C.3 of [UNICODE] and Amendment 1 of [ISO-10646]).
  The UTF-16 encoding was chosen because of its widespread industry practice. Please note that for both HTML and XML, the document character set (and therefore the notation of numeric character references) is based on UCS [ISO-10646]. A single numeric character reference in a source document may therefore in some cases correspond to two 16-bit units in a `DOMString` [p.19] (a high surrogate and a low surrogate). ***Note:*** *Even though the DOM defines the name of the string type to be `DOMString` [p.19] , bindings may use different names. For, example for Java, `DOMString` is bound to the `String` type because it also uses UTF-16 as its encoding.*

Note: *As of August 1998, the OMG IDL specification included a `wstring` type. However, that definition did not meet the interoperability criteria of the DOM API since it relied on encoding negotiation to decide the width of a character.*

1.1.6. Case sensitivity in the DOM

The DOM has many interfaces that imply string matching. HTML processors generally assume an uppercase (less often, lowercase) normalization of names for such things as elements, while XML is explicitly case sensitive. For the purposes of the DOM, string matching is performed purely by binary comparison of the 16-bit units of the `DOMString` [p.19] . As such, the DOM assumes that any normalizations take place in the processor, *before* the DOM structures are built.

This then raises the issue of exactly what normalizations occur. The W3C I18N working group is in the process of defining exactly which normalizations are necessary for applications implementing the DOM.

1.1.7. XML Namespaces

The DOM Level 2 supports XML namespaces [Namespaces] by augmenting several interfaces of the DOM Level 1 Core to allow creating and manipulating elements and attributes associated to a namespace.

As far as the DOM is concerned, special attributes used for declaring XML namespaces are still exposed and can be manipulated just like any other attribute. Moving a node within a document, using the DOM, in no case results in a change of its *namespace prefix* [p.436] or *namespace URI* [p.436] . Similarly, creating a node with a namespace prefix and namespace URI, or changing the namespace prefix of a node, does not result in any addition, removal, or modification of any special attributes for declaring the appropriate XML namespaces. Applications are therefore responsible for declaring every namespace in use when saving a document into XML.

The new methods, such as `createElementNS` and `createAttributeNS` of the `Document` [p.25] interface, are meant to be used by namespace aware applications. Simple applications that do not use namespaces can use the DOM Level 1 methods, such as `createElement` and `createAttribute`. Elements and attributes created in this way do not have any namespace prefix or namespace URI.

1.2. Fundamental Interfaces

The interfaces within this section are considered *fundamental*, and must be fully implemented by all conforming implementations of the DOM, including all HTML DOM implementations, unless otherwise specified.

Exception *DOMException*

DOM operations only raise exceptions in "exceptional" circumstances, i.e., when an operation is impossible to perform (either for logical reasons, because data is lost, or because the implementation has become unstable). In general, DOM methods return specific error values in ordinary processing situation, such as out-of-bound errors when using `NodeList` [p.43] .

Implementations may raise other exceptions under other circumstances. For example, implementations may raise an implementation-dependent exception if a `null` argument is passed.

Some languages and object systems do not support the concept of exceptions. For such systems, error conditions may be indicated using native error reporting mechanisms. For some bindings, for example, methods may return error codes similar to those listed in the corresponding method descriptions.

IDL Definition

```
exception DOMException {
  unsigned short   code;
};

// ExceptionCode
const unsigned short      INDEX_SIZE_ERR                = 1;
const unsigned short      DOMSTRING_SIZE_ERR            = 2;
const unsigned short      HIERARCHY_REQUEST_ERR         = 3;
const unsigned short      WRONG_DOCUMENT_ERR            = 4;
const unsigned short      INVALID_CHARACTER_ERR         = 5;
const unsigned short      NO_DATA_ALLOWED_ERR           = 6;
const unsigned short      NO_MODIFICATION_ALLOWED_ERR   = 7;
const unsigned short      NOT_FOUND_ERR                 = 8;
const unsigned short      NOT_SUPPORTED_ERR             = 9;
const unsigned short      INUSE_ATTRIBUTE_ERR           = 10;
```

Definition group *ExceptionCode*

An integer indicating the type of error generated.

Defined Constants

INDEX_SIZE_ERR	If index or size is negative, or greater than the allowed value
DOMSTRING_SIZE_ERR	If the specified range of text does not fit into a DOMString
HIERARCHY_REQUEST_ERR	If any node is inserted somewhere it doesn't belong
WRONG_DOCUMENT_ERR	If a node is used in a different document than the one that created it (that doesn't support it)
INVALID_CHARACTER_ERR	If an invalid character is specified, such as in a name.
NO_DATA_ALLOWED_ERR	If data is specified for a node which does not support data
NO_MODIFICATION_ALLOWED_ERR	If an attempt is made to modify an object where modifications are not allowed
NOT_FOUND_ERR	If an attempt was made to reference a node in a context where it does not exist
NOT_SUPPORTED_ERR	If the implementation does not support the type of object requested
INUSE_ATTRIBUTE_ERR	If an attempt is made to add an attribute that is already inuse elsewhere

Interface *DOMImplementation*

The `DOMImplementation` interface provides a number of methods for performing operations that are independent of any particular instance of the document object model.

IDL Definition

```
interface DOMImplementation {
  boolean            hasFeature(in DOMString feature,
                                in DOMString version);
  // Introduced in DOM Level 2:
  DocumentType       createDocumentType(in DOMString qualifiedName,
                                        in DOMString publicID,
                                        in DOMString systemID);
  // Introduced in DOM Level 2:
  Document           createDocument(in DOMString namespaceURI,
```

```
                                    in DOMString qualifiedName,
                                    in DocumentType doctype)
                                        raises(DOMException);
};
```

Methods

`hasFeature`

Test if the DOM implementation implements a specific feature.

Parameters

`DOMString` [p.19]	`feature`	The package name of the feature to test (case-insensitive). The legal values are defined throughout this specification. The DOM Level 2 includes "HTML", "XML", as well as the several others.
`DOMString`	`version`	This is the version number of the package name to test. In Level 2, this is the string "2.0". If the version is not specified, supporting any version of the feature will cause the method to return `true`.

Return Value

`boolean`	`true` if the feature is implemented in the specified version, `false` otherwise.

No Exceptions

`createDocumentType` introduced in **DOM Level 2**

Creates an empty `DocumentType` [p.63] node. HTML-only DOM implementations do not need to implement this method.

Parameters

`DOMString` [p.19]	`qualifiedName`	The *qualified name* [p.436] of the document type to be created.
`DOMString`	`publicID`	The document type public identifier.
`DOMString`	`systemID`	The document type system identifier.

Return Value

`DocumentType` [p.63]	A new `DocumentType` node with `Node.ownerDocument` set to `null`.

No Exceptions

`createDocument` introduced in **DOM Level 2**

Creates an XML `Document` [p.25] object of the specified type with its document element. HTML-only DOM implementations do not need to implement this method.

Parameters

`DOMString` [p.19]	`namespaceURI`	The *namespace URI* [p.436] of the document element to create, or `null`.
`DOMString`	`qualifiedName`	The *qualified name* [p.436] of the document element to be created.
`DocumentType` [p.63]	`doctype`	The type of document to be created or `null`. When `doctype` is not `null`, its `Node.ownerDocument` attribute is set to the document being created.

Return Value

`Document` [p.25]	A new `Document` object.

Exceptions

`DOMException` [p.21]	WRONG_DOCUMENT_ERR: Raised if `doctype` has already been used with a different document.

Interface *DocumentFragment*

`DocumentFragment` is a "lightweight" or "minimal" `Document` [p.25] object. It is very common to want to be able to extract a portion of a document's tree or to create a new fragment of a document. Imagine implementing a user command like cut or rearranging a document by moving fragments around. It is desirable to have an object which can hold such fragments and it is quite natural to use a Node for this purpose. While it is true that a `Document` object could fulfill this role, a `Document` object can potentially be a heavyweight object, depending on the underlying implementation. What is really needed for this is a very lightweight object. `DocumentFragment` is such an object.

Furthermore, various operations -- such as inserting nodes as children of another `Node` [p.34] -- may take `DocumentFragment` objects as arguments; this results in all the child nodes of the `DocumentFragment` being moved to the child list of this node.

The children of a DocumentFragment node are zero or more nodes representing the tops of any sub-trees defining the structure of the document. DocumentFragment nodes do not need to be well-formed XML documents (although they do need to follow the rules imposed upon well-formed XML parsed entities, which can have multiple top nodes). For example, a DocumentFragment might have only one child and that child node could be a Text [p.61] node. Such a structure model represents neither an HTML document nor a well-formed XML document.

When a DocumentFragment is inserted into a Document [p.25] (or indeed any other Node [p.34] that may take children) the children of the DocumentFragment and not the DocumentFragment itself are inserted into the Node. This makes the DocumentFragment very useful when the user wishes to create nodes that are siblings; the DocumentFragment acts as the parent of these nodes so that the user can use the standard methods from the Node interface, such as insertBefore and appendChild.

IDL Definition

```
interface DocumentFragment : Node {
};
```

Interface *Document*

The Document interface represents the entire HTML or XML document. Conceptually, it is the root of the document tree, and provides the primary access to the document's data.

Since elements, text nodes, comments, processing instructions, etc. cannot exist outside the context of a Document, the Document interface also contains the factory methods needed to create these objects. The Node [p.34] objects created have a ownerDocument attribute which associates them with the Document within whose context they were created.

IDL Definition

```
interface Document : Node {
  readonly attribute DocumentType     doctype;
  readonly attribute DOMImplementation  implementation;
  readonly attribute Element          documentElement;
  Element            createElement(in DOMString tagName)
                                       raises(DOMException);
  DocumentFragment   createDocumentFragment();
  Text               createTextNode(in DOMString data);
  Comment            createComment(in DOMString data);
  CDATASection       createCDATASection(in DOMString data)
                                       raises(DOMException);
  ProcessingInstruction createProcessingInstruction(in DOMString target,
                                                     in DOMString data)
                                       raises(DOMException);
  Attr               createAttribute(in DOMString name)
                                       raises(DOMException);
  EntityReference    createEntityReference(in DOMString name)
                                       raises(DOMException);
  NodeList           getElementsByTagName(in DOMString tagname);
  // Introduced in DOM Level 2:
  Node               importNode(in Node importedNode,
                                in boolean deep)
                                       raises(DOMException);
```

```
  // Introduced in DOM Level 2:
  Element            createElementNS(in DOMString namespaceURI,
                                     in DOMString qualifiedName)
                                        raises(DOMException);
  // Introduced in DOM Level 2:
  Attr               createAttributeNS(in DOMString namespaceURI,
                                       in DOMString qualifiedName)
                                        raises(DOMException);
  // Introduced in DOM Level 2:
  NodeList           getElementsByTagNameNS(in DOMString namespaceURI,
                                            in DOMString localName);
};
```

Attributes

`doctype` of type `DocumentType` [p.63] , readonly

The Document Type Declaration (see `DocumentType` [p.63]) associated with this document. For HTML documents as well as XML documents without a document type declaration this returns `null`. The DOM Level 2 does not support editing the Document Type Declaration, therefore `docType` cannot be altered in any way, including through the use of methods, such as `insertNode` or `removeNode`, inherited from `Node` [p.34] .

`implementation` of type `DOMImplementation` [p.22] , readonly

The `DOMImplementation` [p.22] object that handles this document. A DOM application may use objects from multiple implementations.

`documentElement` of type `Element` [p.53] , readonly

This is a convenience attribute that allows direct access to the child node that is the root element of the document. For HTML documents, this is the element with the tagName "HTML".

Methods

`createElement`

Creates an element of the type specified. Note that the instance returned implements the `Element` [p.53] interface, so attributes can be specified directly on the returned object. In addition, if there are known attributes with default values, `Attr` [p.51] nodes representing them are automatically created and attached to the element.
To create an element with a qualified name and namespace URI, use the `createElementNS` method.

Parameters

`DOMString` [p.19]	`tagName`	The name of the element type to instantiate. For XML, this is case-sensitive. For HTML, the `tagName` parameter may be provided in any case, but it must be mapped to the canonical uppercase form by the DOM implementation.

Return Value

`Element` [p.53]	A new `Element` object.

Exceptions

`DOMException` [p.21]	INVALID_CHARACTER_ERR: Raised if the specified name contains an invalid character.

`createDocumentFragment`

Creates an empty `DocumentFragment` [p.24] object.

Return Value

`DocumentFragment` [p.24]	A new `DocumentFragment`.

No Parameters

No Exceptions

`createTextNode`

Creates a `Text` [p.61] node given the specified string.

Parameters

`DOMString` [p.19]	`data`	The data for the node.

Return Value

`Text` [p.61]	The new `Text` object.

No Exceptions

`createComment`

Creates a `Comment` [p.62] node given the specified string.

Parameters

`DOMString` [p.19]	`data`	The data for the node.

Return Value

`Comment` [p.62]	The new `Comment` object.

No Exceptions

`createCDATASection`

Creates a `CDATASection` [p.62] node whose value is the specified string.

Parameters

DOMString [p.19]	data	The data for the CDATASection [p.62] contents.

Return Value

CDATASection [p.62]	The new CDATASection object.

Exceptions

DOMException [p.21]	NOT_SUPPORTED_ERR: Raised if this document is an HTML document.

createProcessingInstruction

Creates a ProcessingInstruction [p.66] node given the specified name and data strings.

Parameters

DOMString [p.19]	target	The target part of the processing instruction.
DOMString	data	The data for the node.

Return Value

ProcessingInstruction [p.66]	The new ProcessingInstruction object.

Exceptions

DOMException [p.21]	INVALID_CHARACTER_ERR: Raised if an invalid character is specified. NOT_SUPPORTED_ERR: Raised if this document is an HTML document.

createAttribute

Creates an Attr [p.51] of the given name. Note that the Attr instance can then be set on an Element [p.53] using the setAttribute method.

To create an attribute with a qualified name and namespace URI, use the createAttributeNS method.

Parameters

DOMString [p.19]	name	The name of the attribute.

Return Value

`Attr` [p.51]	A new `Attr` object.

Exceptions

`DOMException` [p.21]	INVALID_CHARACTER_ERR: Raised if the specified name contains an invalid character.

`createEntityReference`

Creates an EntityReference object.

Parameters

`DOMString` [p.19]	`name`	The name of the entity to reference.

Return Value

`EntityReference` [p.65]	The new `EntityReference` object.

Exceptions

`DOMException` [p.21]	INVALID_CHARACTER_ERR: Raised if the specified name contains an invalid character. NOT_SUPPORTED_ERR: Raised if this document is an HTML document.

`getElementsByTagName`

Returns a `NodeList` [p.43] of all the `Element` [p.53] s with a given tag name in the order in which they would be encountered in a preorder traversal of the `Document` tree.

Parameters

`DOMString` [p.19]	`tagname`	The name of the tag to match on. The special value "*" matches all tags.

Return Value

`NodeList` [p.43]	A new `NodeList` object containing all the matched `Element` [p.53] s.

No Exceptions

`importNode` introduced in **DOM Level 2**

Imports a node from another document to this document. The returned node has no parent (`parentNode` is `null`). The source node is not altered or removed from the original document; this method creates a new copy of the source node.

For all nodes, importing a node creates a node object owned by the importing document, with attribute values identical to the source node's `nodeName` and `nodeType`, plus the attributes related to namespaces (prefix and namespaces URI). As in the `cloneNode` operation on a `Node` [p.34] , the source node is not altered.

Additional information is copied as appropriate to the `nodeType`, attempting to mirror the behavior expected if a fragment of XML or HTML source was copied from one document to another, recognizing that the two documents may have different DTDs in the XML case. The following list describes the specifics for every type of node.

ELEMENT_NODE

Specified attribute nodes of the source element are imported, and the generated `Attr` [p.51] nodes are attached to the generated `Element` [p.53] . Default attributes are *not* copied, though if the document being imported into defines default attributes for this element name, those are assigned. If `importNode` `deep` parameter was set to `true`, the descendants of the source element will be recursively imported and the resulting nodes reassembled to form the corresponding subtree.

ATTRIBUTE_NODE

The `specified` flag is set to `true` on the generated `Attr` [p.51] . The descendants of the the source `Attr` are recursively imported and the resulting nodes reassembled to form the corresponding subtree.

Note that the `deep` parameter does not apply to `Attr` [p.51] nodes; they always carry their children with them when imported.

TEXT_NODE, CDATA_SECTION_NODE, COMMENT_NODE

These three types of nodes inheriting from `CharacterData` [p.48] copy their `data` and `length` attributes from those of the source node.

ENTITY_REFERENCE_NODE

Only the `EntityReference` [p.65] itself is copied, even if a `deep` import is requested, since the source and destination documents might have defined the entity differently. If the document being imported into provides a definition for this entity name, its value is assigned.

ENTITY_NODE

`Entity` [p.64] nodes can be imported, however in the current release of the DOM the `DocumentType` [p.63] is readonly. Ability to add these imported nodes to a `DocumentType` will be considered for addition to a future release of the DOM.

On import, the `publicID`, `systemID`, and `notationName` attributes are copied. If a `deep` import is requested, the descendants of the the source `Entity` [p.64] is recursively imported and the resulting nodes reassembled to form the corresponding subtree.

PROCESSING_INSTRUCTION_NODE

The imported node copies its `target` and `data` values from those of the source node.

DOCUMENT_NODE

`Document` nodes cannot be imported.

DOCUMENT_TYPE_NODE
`DocumentType` [p.63] nodes cannot be imported.
DOCUMENT_FRAGMENT_NODE
If the `deep` option was set `true`, the descendants of the source element will be recursively imported and the resulting nodes reassembled to form the corresponding subtree. Otherwise, this simply generates an empty `DocumentFragment` [p.24] .
NOTATION_NODE
`Notation` [p.64] nodes be imported, however in the current release of the DOM the `DocumentType` [p.63] is readonly. Ability to add these imported nodes to a `DocumentType` will be considered for addition to a future release of the DOM.
On import, the `publicID`, and `systemID` attributes are copied.
Note that the `deep` parameter does not apply to `Notation` [p.64] nodes since they never have any children.
Parameters

`Node` [p.34]	`importedNode`	The node to import.
`boolean`	`deep`	If `true`, recursively import the subtree under the specified node; if `false`, import only the node itself, as explained above. This does not apply to `Attr` [p.51] , `EntityReference` [p.65] , and `Notation` [p.64] nodes.

Return Value

`Node` [p.34]	The imported node that belongs to this `Document`.

Exceptions

`DOMException` [p.21]	NOT_SUPPORTED_ERR: Raised if the type of node being imported is not supported.

`createElementNS` introduced in **DOM Level 2**
Creates an element of the given qualified name and namespace URI. HTML-only DOM implementations do not need to implement this method.
Parameters

`DOMString` [p.19]	`namespaceURI`	The *namespace URI* [p.436] of the element to create. When it is `null` or an empty string, this method behaves like `createElement`.
`DOMString`	`qualifiedName`	The *qualified name* [p.436] of the element type to instantiate.

Return Value

`Element` [p.53] A new `Element` object with the following attributes:

Attribute	Value
`Node.nodeName`	`qualifiedName`
`Node.namespaceName`	`namespaceURI`
`Node.prefix`	prefix, extracted from `qualifiedName`, or `null` if there is no prefix
`Node.localName`	*local name* [p.435] , extracted from `qualifiedName`
`Element.tagName`	`qualifiedName`

Exceptions

`DOMException` [p.21]	INVALID_CHARACTER_ERR: Raised if the specified name contains an invalid character.

`createAttributeNS` introduced in **DOM Level 2**

Creates an attribute of the given qualified name and namespace URI. HTML-only DOM implementations do not need to implement this method.

Parameters

`DOMString` [p.19]	`namespaceURI`	The *namespace URI* [p.436] of the attribute to create. When it is `null` or an empty string, this method behaves like `createAttribute`.
`DOMString`	`qualifiedName`	The *qualified name* [p.436] of the attribute to instantiate.

Return Value

`Attr` [p.51] A new `Attr` object with the following attributes:

Attribute	Value
`Node.nodeName`	qualifiedName
`Node.namespaceName`	`namespaceURI`
`Node.prefix`	prefix, extracted from `qualifiedName`, or `null` if there is no prefix
`Node.localName`	*local name* [p.435] , extracted from `qualifiedName`
`Attr.name`	`qualifiedName`

Exceptions

`DOMException` [p.21]	INVALID_CHARACTER_ERR: Raised if the specified name contains an invalid character.

`getElementsByTagNameNS` introduced in **DOM Level 2**

Returns a `NodeList` [p.43] of all the `Element` [p.53] s with a given *local name* [p.435] and namespace URI in the order in which they would be encountered in a preorder traversal of the `Document` tree.

Parameters

`DOMString` [p.19]	`namespaceURI`	The *namespace URI* [p.436] of the elements to match on. The special value "*" matches all namespaces. When it is `null` or an empty string, this method behaves like `getElementsByTagName`.
`DOMString`	`localName`	The *local name* [p.435] of the elements to match on. The special value "*" matches all local names.

Return Value

`NodeList` [p.43]	A new `NodeList` object containing all the matched `Element` [p.53] s.

No Exceptions

Interface *Node*

The `Node` interface is the primary datatype for the entire Document Object Model. It represents a single node in the document tree. While all objects implementing the `Node` interface expose methods for dealing with children, not all objects implementing the `Node` interface may have children. For example, `Text` [p.61] nodes may not have children, and adding children to such nodes results in a `DOMException` [p.21] being raised.

The attributes `nodeName`, `nodeValue` and `attributes` are included as a mechanism to get at node information without casting down to the specific derived interface. In cases where there is no obvious mapping of these attributes for a specific `nodeType` (e.g., `nodeValue` for an `Element` [p.53] or `attributes` for a `Comment` [p.62]), this returns `null`. Note that the specialized interfaces may contain additional and more convenient mechanisms to get and set the relevant information.

IDL Definition

```
interface Node {
  // NodeType
  const unsigned short      ELEMENT_NODE                   = 1;
  const unsigned short      ATTRIBUTE_NODE                 = 2;
  const unsigned short      TEXT_NODE                      = 3;
  const unsigned short      CDATA_SECTION_NODE             = 4;
  const unsigned short      ENTITY_REFERENCE_NODE          = 5;
  const unsigned short      ENTITY_NODE                    = 6;
  const unsigned short      PROCESSING_INSTRUCTION_NODE    = 7;
  const unsigned short      COMMENT_NODE                   = 8;
  const unsigned short      DOCUMENT_NODE                  = 9;
  const unsigned short      DOCUMENT_TYPE_NODE             = 10;
  const unsigned short      DOCUMENT_FRAGMENT_NODE         = 11;
  const unsigned short      NOTATION_NODE                  = 12;

  readonly attribute DOMString        nodeName;
           attribute DOMString        nodeValue;
                                        // raises(DOMException) on setting
                                        // raises(DOMException) on retrieval

  readonly attribute unsigned short   nodeType;
  readonly attribute Node             parentNode;
  readonly attribute NodeList         childNodes;
  readonly attribute Node             firstChild;
  readonly attribute Node             lastChild;
  readonly attribute Node             previousSibling;
  readonly attribute Node             nextSibling;
  readonly attribute NamedNodeMap     attributes;
  // Modified in DOM Level 2:
  readonly attribute Document         ownerDocument;
  Node               insertBefore(in Node newChild,
                                  in Node refChild)
                                    raises(DOMException);
  Node               replaceChild(in Node newChild,
                                  in Node oldChild)
                                    raises(DOMException);
```

```
  Node               removeChild(in Node oldChild)
                                        raises(DOMException);
  Node               appendChild(in Node newChild)
                                        raises(DOMException);
  boolean            hasChildNodes();
  Node               cloneNode(in boolean deep);
  // Introduced in DOM Level 2:
  boolean            supports(in DOMString feature,
                              in DOMString version);
  // Introduced in DOM Level 2:
  readonly attribute DOMString        namespaceURI;
  // Introduced in DOM Level 2:
           attribute DOMString        prefix;
                                        // raises(DOMException) on setting

  // Introduced in DOM Level 2:
  readonly attribute DOMString        localName;
};
```

Definition group *NodeType*

An integer indicating which type of node this is.
Defined Constants

ELEMENT_NODE	The node is a `Element` [p.53] .
ATTRIBUTE_NODE	The node is an `Attr` [p.51] .
TEXT_NODE	The node is a `Text` [p.61] node.
CDATA_SECTION_NODE	The node is a `CDATASection` [p.62] .
ENTITY_REFERENCE_NODE	The node is an `EntityReference` [p.65] .
ENTITY_NODE	The node is an `Entity` [p.64] .
PROCESSING_INSTRUCTION_NODE	The node is a `ProcessingInstruction` [p.66] .
COMMENT_NODE	The node is a `Comment` [p.62] .
DOCUMENT_NODE	The node is a `Document` [p.25] .
DOCUMENT_TYPE_NODE	The node is a `DocumentType` [p.63] .
DOCUMENT_FRAGMENT_NODE	The node is a `DocumentFragment` [p.24] .
NOTATION_NODE	The node is a `Notation` [p.64] .

The values of `nodeName`, `nodeValue`, and `attributes` vary according to the node type as follows:

	nodeName	**nodeValue**	**attributes**
Element	tagName	null	NamedNodeMap
Attr	name of attribute	value of attribute	null
Text	#text	content of the text node	null
CDATASection	#cdata-section	content of the CDATA Section	null
EntityReference	name of entity referenced	null	null
Entity	entity name	null	null
ProcessingInstruction	target	entire content excluding the target	null
Comment	#comment	content of the comment	null
Document	#document	null	null
DocumentType	document type name	null	null
DocumentFragment	#document-fragment	null	null
Notation	notation name	null	null

Attributes

`nodeName` of type `DOMString` [p.19] , readonly

The name of this node, depending on its type; see the table above.

`nodeValue` of type `DOMString` [p.19]

The value of this node, depending on its type; see the table above. When it is defined to be `null`, setting it has no effect.

Exceptions on setting

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised when the node is readonly.

Exceptions on retrieval

`DOMException` [p.21]	DOMSTRING_SIZE_ERR: Raised when it would return more characters than fit in a `DOMString` [p.19] variable on the implementation platform.

`nodeType` of type `unsigned short`, readonly
: A code representing the type of the underlying object, as defined above.

`parentNode` of type `Node` [p.34] , readonly
: The parent of this node. All nodes, except `Attr` [p.51] , `Document` [p.25] , `DocumentFragment` [p.24] , `Entity` [p.64] , and `Notation` [p.64] may have a parent. However, if a node has just been created and not yet added to the tree, or if it has been removed from the tree, this is `null`.

`childNodes` of type `NodeList` [p.43] , readonly
: A `NodeList` [p.43] that contains all children of this node. If there are no children, this is a `NodeList` containing no nodes. The content of the returned `NodeList` is "live" in the sense that, for instance, changes to the children of the node object that it was created from are immediately reflected in the nodes returned by the `NodeList` accessors; it is not a static snapshot of the content of the node. This is true for every `NodeList`, including the ones returned by the `getElementsByTagName` method.

`firstChild` of type `Node` [p.34] , readonly
: The first child of this node. If there is no such node, this returns `null`.

`lastChild` of type `Node` [p.34] , readonly
: The last child of this node. If there is no such node, this returns `null`.

`previousSibling` of type `Node` [p.34] , readonly
: The node immediately preceding this node. If there is no such node, this returns `null`.

`nextSibling` of type `Node` [p.34] , readonly
: The node immediately following this node. If there is no such node, this returns `null`.

`attributes` of type `NamedNodeMap` [p.44] , readonly
: A `NamedNodeMap` [p.44] containing the attributes of this node (if it is an `Element` [p.53]) or `null` otherwise.

`ownerDocument` of type `Document` [p.25] , readonly, modified in **DOM Level 2**
: The `Document` [p.25] object associated with this node. This is also the `Document` object used to create new nodes. When this node is a `Document` or a `DocumentType` [p.63] , which is not used with any `Document` yet, this is `null`.

`namespaceURI` of type `DOMString` [p.19] , readonly, introduced in **DOM Level 2**
: The *namespace URI* [p.436] of this node, or `null` if it is unspecified. When this node is of any type other than `ELEMENT_NODE` and `ATTRIBUTE_NODE`, this is always `null` and setting it has no effect.
: This is not a computed value that is the result of a namespace lookup based on an examination of the namespace declarations in scope. It is merely the namespace URI given at creation time.
: For nodes created with a DOM Level 1 method, such as `createElement` from the `Document` [p.25] interface, this is `null`.

`prefix` of type `DOMString` [p.19] , introduced in **DOM Level 2**

The *namespace prefix* [p.436] of this node, or `null` if it is unspecified. When this node is of any type other than `ELEMENT_NODE` and `ATTRIBUTE_NODE` this is always `null` and setting it has no effect.

For nodes created with a DOM Level 1 method, such as `createElement` from the `Document` [p.25] interface, this is `null`.

Note that setting this attribute changes the `nodeName` attribute, which holds the *qualified name* [p.436] , as well as the `tagName` and `name` attributes of the `Element` [p.53] and `Attr` [p.51] interfaces, when applicable.

Exceptions on setting

`DOMException` [p.21]	INVALID_CHARACTER_ERR: Raised if the specified prefix contains an invalid character.

`localName` of type `DOMString` [p.19] , readonly, introduced in **DOM Level 2**

Returns the local part of the *qualified name* [p.436] of this node.

For nodes created with a DOM Level 1 method, such as `createElement` from the `Document` [p.25] interface, and for nodes of any type other than `ELEMENT_NODE` and `ATTRIBUTE_NODE` this is the same as the `nodeName` attribute.

Methods

`insertBefore`

Inserts the node `newChild` before the existing child node `refChild`. If `refChild` is `null`, insert `newChild` at the end of the list of children.

If `newChild` is a `DocumentFragment` [p.24] object, all of its children are inserted, in the same order, before `refChild`. If the `newChild` is already in the tree, it is first removed.

Parameters

`Node` [p.34]	`newChild`	The node to insert.
`Node`	`refChild`	The reference node, i.e., the node before which the new node must be inserted.

Return Value

`Node` [p.34]	The node being inserted.

Exceptions

`DOMException` [p.21]	HIERARCHY_REQUEST_ERR: Raised if this node is of a type that does not allow children of the type of the `newChild` node, or if the node to insert is one of this node's ancestors. WRONG_DOCUMENT_ERR: Raised if `newChild` was created from a different document than the one that created this node. NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly. NOT_FOUND_ERR: Raised if `refChild` is not a child of this node.

`replaceChild`

Replaces the child node `oldChild` with `newChild` in the list of children, and returns the `oldChild` node. If the `newChild` is already in the tree, it is first removed.

Parameters

`Node` [p.34]	`newChild`	The new node to put in the child list.
`Node`	`oldChild`	The node being replaced in the list.

Return Value

`Node` [p.34]	The node replaced.

Exceptions

`DOMException` [p.21]	HIERARCHY_REQUEST_ERR: Raised if this node is of a type that does not allow children of the type of the `newChild` node, or it the node to put in is one of this node's ancestors. WRONG_DOCUMENT_ERR: Raised if `newChild` was created from a different document than the one that created this node. NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly. NOT_FOUND_ERR: Raised if `oldChild` is not a child of this node.

`removeChild`

Removes the child node indicated by `oldChild` from the list of children, and returns it.

Parameters

`Node` [p.34]	`oldChild`	The node being removed.

Return Value

`Node` [p.34]	The node removed.

Exceptions

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly. NOT_FOUND_ERR: Raised if `oldChild` is not a child of this node.

`appendChild`

Adds the node `newChild` to the end of the list of children of this node. If the `newChild` is already in the tree, it is first removed.

Parameters

`Node` [p.34]	`newChild`	The node to add. If it is a `DocumentFragment` [p.24] object, the entire contents of the document fragment are moved into the child list of this node

Return Value

`Node` [p.34]	The node added.

Exceptions

`DOMException` [p.21]	HIERARCHY_REQUEST_ERR: Raised if this node is of a type that does not allow children of the type of the `newChild` node, or if the node to append is one of this node's ancestors. WRONG_DOCUMENT_ERR: Raised if `newChild` was created from a different document than the one that created this node. NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly.

`hasChildNodes`

This is a convenience method to allow easy determination of whether a node has any children.

Return Value

`boolean`	`true` if the node has any children, `false` if the node has no children.

No Parameters

No Exceptions

`cloneNode`

Returns a duplicate of this node, i.e., serves as a generic copy constructor for nodes. The duplicate node has no parent (`parentNode` returns `null`.).

Cloning an `Element` [p.53] copies all attributes and their values, including those generated by the XML processor to represent defaulted attributes, but this method does not copy any text it contains unless it is a deep clone, since the text is contained in a child `Text` [p.61] node. Cloning any other type of node simply returns a copy of this node.

Parameters

`boolean`	`deep`	If `true`, recursively clone the subtree under the specified node; if `false`, clone only the node itself (and its attributes, if it is an `Element` [p.53]).

Return Value

`Node` [p.34]	The duplicate node.

No Exceptions

`supports` introduced in **DOM Level 2**

Tests whether the DOM implementation implements a specific feature and that feature is supported by this node.

Parameters

`DOMString` [p.19]	`feature`	The package name of the feature to test. This is the same name as what can be passed to the method `hasFeature` on `DOMImplementation` [p.22] .
`DOMString`	`version`	This is the version number of the package name to test. In Level 2, version 1, this is the string "2.0". If the version is not specified, supporting any version of the feature will cause the method to return `true`.

Return Value

`boolean`	Returns `true` if this node defines a subtree within which the specified feature is supported, `false` otherwise.

No Exceptions

Interface *NodeList*

The `NodeList` interface provides the abstraction of an ordered collection of nodes, without defining or constraining how this collection is implemented.

The items in the `NodeList` are accessible via an integral index, starting from 0.

IDL Definition

```
interface NodeList {
  Node               item(in unsigned long index);
  readonly attribute unsigned long    length;
};
```

Attributes

`length` of type `unsigned long`, readonly

The number of nodes in the list. The range of valid child node indices is 0 to `length-1` inclusive.

Methods

`item`

Returns the `index`th item in the collection. If `index` is greater than or equal to the number of nodes in the list, this returns `null`.

Parameters

`unsigned long`	`index`	Index into the collection.

Return Value

`Node` [p.34]	The node at the `index`th position in the `NodeList`, or `null` if that is not a valid index.

No Exceptions

Interface *NamedNodeMap*

Objects implementing the `NamedNodeMap` interface are used to represent collections of nodes that can be accessed by name. Note that `NamedNodeMap` does not inherit from `NodeList` [p.42] ; `NamedNodeMaps` are not maintained in any particular order. Objects contained in an object implementing `NamedNodeMap` may also be accessed by an ordinal index, but this is simply to allow convenient enumeration of the contents of a `NamedNodeMap`, and does not imply that the DOM specifies an order to these Nodes.

IDL Definition

```
interface NamedNodeMap {
  Node               getNamedItem(in DOMString name);
  Node               setNamedItem(in Node arg)
                                    raises(DOMException);
  Node               removeNamedItem(in DOMString name)
                                    raises(DOMException);
  Node               item(in unsigned long index);
  readonly attribute unsigned long    length;
  // Introduced in DOM Level 2:
  Node               getNamedItemNS(in DOMString namespaceURI,
                                    in DOMString localName);
  // Introduced in DOM Level 2:
  Node               removeNamedItemNS(in DOMString namespaceURI,
                                       in DOMString name)
                                       raises(DOMException);
};
```

Attributes

`length` of type `unsigned long`, readonly

The number of nodes in the map. The range of valid child node indices is 0 to `length-1` inclusive.

Methods

`getNamedItem`

Retrieves a node specified by name.

Parameters

`DOMString` [p.19]	`name`	Name of a node to retrieve.

Return Value

`Node` [p.34]	A `Node` (of any type) with the specified name, or `null` if the specified name did not identify any node in the map.

No Exceptions

`setNamedItem`

Adds a node using its `nodeName` attribute, which is the *qualified name* [p.436] when applicable.

As the `nodeName` attribute is used to derive the name which the node must be stored under, multiple nodes of certain types (those that have a "special" string value) cannot be stored as the names would clash. This is seen as preferable to allowing nodes to be aliased.

Parameters

`Node` [p.34]	`arg`	A node to store in a named node map. The node will later be accessible using the value of the `nodeName` attribute of the node. If a node with that name is already present in the map, it is replaced by the new one.

Return Value

`Node` [p.34]	If the new `Node` replaces an existing node with the same name the previously existing `Node` is returned, otherwise `null` is returned.

Exceptions

`DOMException` [p.21]	WRONG_DOCUMENT_ERR: Raised if `arg` was created from a different document than the one that created the `NamedNodeMap`. NO_MODIFICATION_ALLOWED_ERR: Raised if this `NamedNodeMap` is readonly. INUSE_ATTRIBUTE_ERR: Raised if `arg` is an `Attr` [p.51] that is already an attribute of another `Element` [p.53] object. The DOM user must explicitly clone `Attr` nodes to re-use them in other elements.

`removeNamedItem`

Removes a node specified by name.

Parameters

`DOMString` [p.19]	`name`	The name of a node to remove. When this `NamedNodeMap` contains the attributes attached to an element, as returned by the attributes attribute of the `Node` [p.34] interface, if the removed attribute is known to have a default value, an attribute immediately appears containing the default value.

Return Value

`Node` [p.34]	The node removed from the map if a node with such a name exists.

Exceptions

`DOMException` [p.21]	NOT_FOUND_ERR: Raised if there is no node named `name` in the map.

`item`

Returns the `index`th item in the map. If `index` is greater than or equal to the number of nodes in the map, this returns `null`.

Parameters

`unsigned long`	`index`	Index into the map.

Return Value

`Node` [p.34]	The node at the `index`th position in the `NamedNodeMap`, or `null` if that is not a valid index.

No Exceptions

`getNamedItemNS` introduced in **DOM Level 2**

Retrieves a node specified by local name and namespace URI. HTML-only DOM implementations do not need to implement this method.

Parameters

`DOMString` [p.19]	`namespaceURI`	The *namespace URI* [p.436] of the node to retrieve. When it is `null` or an empty string, this method behaves like `getNamedItem`.
`DOMString`	`localName`	The *local name* [p.435] of the node to retrieve.

Return Value

`Node` [p.34]	A `Node` (of any type) with the specified name, or `null` if the specified name did not identify any node in the map.

No Exceptions

`removeNamedItemNS` introduced in **DOM Level 2**

Removes a node specified by local name and namespace URI. HTML-only DOM implementations do not need to implement this method.

Parameters

`DOMString` [p.19]	`namespaceURI`	The *namespace URI* [p.436] of the node to remove. When it is `null` or an empty string, this method behaves like `removeNamedItem`.
`DOMString`	`name`	The *local name* [p.435] of the node to remove. When this `NamedNodeMap` contains the attributes attached to an element, as returned by the attributes attribute of the `Node` [p.34] interface, if the removed attribute is known to have a default value, an attribute immediately appears containing the default value.

Return Value

`Node` [p.34]	The node removed from the map if a node with such a local name and namespace URI exists.

Exceptions

`DOMException` [p.21]	NOT_FOUND_ERR: Raised if there is no node named `name` in the map.

Interface *CharacterData*

The `CharacterData` interface extends Node with a set of attributes and methods for accessing character data in the DOM. For clarity this set is defined here rather than on each object that uses these attributes and methods. No DOM objects correspond directly to `CharacterData`, though `Text` [p.61] and others do inherit the interface from it. All `offsets` in this interface start from 0.

IDL Definition

```
interface CharacterData : Node {
           attribute DOMString        data;
                                        // raises(DOMException) on setting
                                        // raises(DOMException) on retrieval

  readonly attribute unsigned long    length;
  DOMString          substringData(in unsigned long offset,
                                   in unsigned long count)
                                        raises(DOMException);
  void               appendData(in DOMString arg)
                                        raises(DOMException);
  void               insertData(in unsigned long offset,
                                in DOMString arg)
                                        raises(DOMException);
  void               deleteData(in unsigned long offset,
                                in unsigned long count)
                                        raises(DOMException);
  void               replaceData(in unsigned long offset,
                                 in unsigned long count,
                                 in DOMString arg)
                                        raises(DOMException);
};
```

Attributes

`data` of type `DOMString` [p.19]

The character data of the node that implements this interface. The DOM implementation may not put arbitrary limits on the amount of data that may be stored in a `CharacterData` node. However, implementation limits may mean that the entirety of a node's data may not fit into a single `DOMString` [p.19] . In such cases, the user may call `substringData` to retrieve the data in appropriately sized pieces.

Exceptions on setting

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised when the node is readonly.

Exceptions on retrieval

`DOMException` [p.21]	DOMSTRING_SIZE_ERR: Raised when it would return more characters than fit in a `DOMString` [p.19] variable on the implementation platform.

`length` of type `unsigned long`, readonly

The number of 16-bit units that are available through `data` and the `substringData` method below. This may have the value zero, i.e., `CharacterData` nodes may be empty.

Methods

`substringData`

Extracts a range of data from the node.

Parameters

unsigned long	offset	Start offset of substring to extract.
unsigned long	count	The number of 16-bit units to extract.

Return Value

DOMString [p.19]	The specified substring. If the sum of offset and count exceeds the length, then all 16-bit units to the end of the data are returned.

Exceptions

DOMException [p.21]	INDEX_SIZE_ERR: Raised if the specified offset is negative or greater than the number of 16-bit units in data, or if the specified count is negative. DOMSTRING_SIZE_ERR: Raised if the specified range of text does not fit into a DOMString [p.19] .

appendData

Append the string to the end of the character data of the node. Upon success, data provides access to the concatenation of data and the DOMString [p.19] specified.

Parameters

DOMString [p.19]	arg	The DOMString to append.

Exceptions

DOMException [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly.

No Return Value

insertData

Insert a string at the specified character offset.

Parameters

unsigned long	offset	The character offset at which to insert.
DOMString [p.19]	arg	The DOMString to insert.

Exceptions

DOMException [p.21]	INDEX_SIZE_ERR: Raised if the specified `offset` is negative or greater than the number of 16-bit units in `data`. NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly.

No Return Value

`deleteData`

Remove a range of 16-bit units from the node. Upon success, `data` and `length` reflect the change.

Parameters

unsigned long	offset	The offset from which to start removing.
unsigned long	count	The number of 16-bit units to delete. If the sum of `offset` and `count` exceeds `length` then all 16-bit units from `offset` to the end of the data are deleted.

Exceptions

DOMException [p.21]	INDEX_SIZE_ERR: Raised if the specified `offset` is negative or greater than the number of 16-bit units in `data`, or if the specified `count` is negative. NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly.

No Return Value

`replaceData`

Replace the characters starting at the specified 16-bit unit offset with the specified string.

Parameters

unsigned long	offset	The offset from which to start replacing.
unsigned long	count	The number of 16-bit units to replace. If the sum of offset and count exceeds length, then all 16-bit units to the end of the data are replaced (i.e., the effect is the same as a remove method call with the same range, followed by an append method invocation).
DOMString [p.19]	arg	The DOMString with which the range must be replaced.

Exceptions

DOMException [p.21]	INDEX_SIZE_ERR: Raised if the specified offset is negative or greater than the number of 16-bit units in data, or if the specified count is negative. NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly.

No Return Value

Interface *Attr*

The Attr interface represents an attribute in an Element [p.53] object. Typically the allowable values for the attribute are defined in a document type definition.

Attr objects inherit the Node [p.34] interface, but since they are not actually child nodes of the element they describe, the DOM does not consider them part of the document tree. Thus, the Node attributes parentNode, previousSibling, and nextSibling have a null value for Attr objects. The DOM takes the view that attributes are properties of elements rather than having a separate identity from the elements they are associated with; this should make it more efficient to implement such features as default attributes associated with all elements of a given type. Furthermore, Attr nodes may not be immediate children of a DocumentFragment [p.24] . However, they can be associated with Element [p.53] nodes contained within a DocumentFragment. In short, users and implementors of the DOM need to be aware that Attr nodes have some things in common with other objects inheriting the Node interface, but they also are quite distinct.

The attribute's effective value is determined as follows: if this attribute has been explicitly assigned any value, that value is the attribute's effective value; otherwise, if there is a declaration for this attribute, and that declaration includes a default value, then that default value is the attribute's effective value; otherwise, the attribute does not exist on this element in the structure model until it has been explicitly added. Note that the nodeValue attribute on the Attr instance can also be used to retrieve the string version of the attribute's value(s).

In XML, where the value of an attribute can contain entity references, the child nodes of the `Attr` node provide a representation in which entity references are not expanded. These child nodes may be either `Text` [p.61] or `EntityReference` [p.65] nodes. Because the attribute type may be unknown, there are no tokenized attribute values.

IDL Definition

```
interface Attr : Node {
  readonly attribute DOMString        name;
  readonly attribute boolean          specified;
           attribute DOMString        value;
                                        // raises(DOMException) on setting

  // Introduced in DOM Level 2:
  readonly attribute Element          ownerElement;
};
```

Attributes

`name` of type `DOMString` [p.19] , readonly

Returns the name of this attribute.

`specified` of type `boolean`, readonly

If this attribute was explicitly given a value in the original document, this is `true`; otherwise, it is `false`. Note that the implementation is in charge of this attribute, not the user. If the user changes the value of the attribute (even if it ends up having the same value as the default value) then the `specified` flag is automatically flipped to `true`. To re-specify the attribute as the default value from the DTD, the user must delete the attribute. The implementation will then make a new attribute available with `specified` set to `false` and the default value (if one exists).

In summary:

- If the attribute has an assigned value in the document then `specified` is `true`, and the value is the assigned value.
- If the attribute has no assigned value in the document and has a default value in the DTD, then `specified` is `false`, and the value is the default value in the DTD.
- If the attribute has no assigned value in the document and has a value of #IMPLIED in the DTD, then the attribute does not appear in the structure model of the document.

`value` of type `DOMString` [p.19]

On retrieval, the value of the attribute is returned as a string. Character and general entity references are replaced with their values.

On setting, this creates a `Text` [p.61] node with the unparsed contents of the string.

Exceptions on setting

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised when the node is readonly.

`ownerElement` of type `Element` [p.53] , readonly, introduced in **DOM Level 2**

The `Element` [p.53] node this attribute is attached to or `null` if this attribute is not in use.

Interface *Element*

By far the vast majority of objects (apart from text) that authors encounter when traversing a document are `Element` nodes. Assume the following XML document:

```
<elementExample id="demo">
  <subelement1/>
  <subelement2><subsubelement/></subelement2>
</elementExample>
```

When represented using DOM, the top node is a `Document` [p.25] node containing an `Element` node for "elementExample" which contains two child `Element` nodes, one for "subelement1" and one for "subelement2". "subelement1" contains no child nodes.

Elements may have attributes associated with them; since the `Element` interface inherits from `Node` [p.34] , the generic `Node` interface attribute `attributes` may be used to retrieve the set of all attributes for an element. There are methods on the `Element` interface to retrieve either an `Attr` [p.50] object by name or an attribute value by name. In XML, where an attribute value may contain entity references, an `Attr` object should be retrieved to examine the possibly fairly complex sub-tree representing the attribute value. On the other hand, in HTML, where all attributes have simple string values, methods to directly access an attribute value can safely be used as a convenience.

IDL Definition

```
interface Element : Node {
  readonly attribute DOMString        tagName;
  DOMString          getAttribute(in DOMString name);
  void               setAttribute(in DOMString name,
                                  in DOMString value)
                                        raises(DOMException);
  void               removeAttribute(in DOMString name)
                                        raises(DOMException);
  Attr               getAttributeNode(in DOMString name);
  Attr               setAttributeNode(in Attr newAttr)
                                        raises(DOMException);
  Attr               removeAttributeNode(in Attr oldAttr)
                                        raises(DOMException);
  NodeList           getElementsByTagName(in DOMString name);
  void               normalize();
  // Introduced in DOM Level 2:
  DOMString          getAttributeNS(in DOMString namespaceURI,
                                    in DOMString localName);
  // Introduced in DOM Level 2:
  void               setAttributeNS(in DOMString namespaceURI,
                                    in DOMString localName,
                                    in DOMString value)
                                        raises(DOMException);
  // Introduced in DOM Level 2:
  void               removeAttributeNS(in DOMString namespacURI,
                                       in DOMString localName)
                                        raises(DOMException);
  // Introduced in DOM Level 2:
  Attr               getAttributeNodeNS(in DOMString namespaceURI,
                                        in DOMString localName);
  // Introduced in DOM Level 2:
```

```
  Attr               setAttributeNodeNS(in Attr newAttr)
                                        raises(DOMException);
  // Introduced in DOM Level 2:
  NodeList           getElementsByTagNameNS(in DOMString namespaceURI,
                                            in DOMString localName);
};
```

Attributes

`tagName` of type `DOMString` [p.19] , readonly

The name of the element. For example, in:

```
<elementExample id="demo">
        ...
</elementExample> ,
```

`tagName` has the value `"elementExample"`. Note that this is case-preserving in XML, as are all of the operations of the DOM. The HTML DOM returns the `tagName` of an HTML element in the canonical uppercase form, regardless of the case in the source HTML document.

Methods

`getAttribute`

Retrieves an attribute value by name.

Parameters

`DOMString` [p.19]	`name`	The name of the attribute to retrieve.

Return Value

`DOMString` [p.19]	The `Attr` [p.50] value as a string, or the empty string if that attribute does not have a specified or default value.

No Exceptions

`setAttribute`

Adds a new attribute. If an attribute with that name is already present in the element, its value is changed to be that of the value parameter. This value is a simple string, it is not parsed as it is being set. So any markup (such as syntax to be recognized as an entity reference) is treated as literal text, and needs to be appropriately escaped by the implementation when it is written out. In order to assign an attribute value that contains entity references, the user must create an `Attr` [p.50] node plus any `Text` [p.61] and `EntityReference` [p.65] nodes, build the appropriate subtree, and use `setAttributeNode` to assign it as the value of an attribute.

Parameters

`DOMString` [p.19]	`name`	The name of the attribute to create or alter.
`DOMString`	`value`	Value to set in string form.

Exceptions

`DOMException` [p.21]	INVALID_CHARACTER_ERR: Raised if the specified name contains an invalid character. NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly.

No Return Value

`removeAttribute`

Removes an attribute by name. If the removed attribute is known to have a default value, an attribute immediately appears containing the default value.

Parameters

`DOMString` [p.19]	`name`	The name of the attribute to remove.

Exceptions

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly.

No Return Value

`getAttributeNode`

Retrieves an `Attr` [p.50] node by name.

Parameters

`DOMString` [p.19]	`name`	The name of the attribute to retrieve.

Return Value

`Attr` [p.50]	The `Attr` node with the specified attribute name or `null` if there is no such attribute.

No Exceptions

`setAttributeNode`

Adds a new attribute. If an attribute with that name is already present in the element, it is replaced by the new one.

Parameters

`Attr` [p.50]	`newAttr`	The `Attr` node to add to the attribute list.

Return Value

`Attr` [p.50]	If the `newAttr` attribute replaces an existing attribute with the same name, the previously existing `Attr` node is returned, otherwise `null` is returned.

Exceptions

`DOMException` [p.21]	WRONG_DOCUMENT_ERR: Raised if `newAttr` was created from a different document than the one that created the element. NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly. INUSE_ATTRIBUTE_ERR: Raised if `newAttr` is already an attribute of another `Element` object. The DOM user must explicitly clone `Attr` [p.50] nodes to re-use them in other elements.

`removeAttributeNode`

Removes the specified attribute.

Parameters

`Attr` [p.50]	`oldAttr`	The `Attr` node to remove from the attribute list. If the removed `Attr` has a default value it is immediately replaced.

Return Value

`Attr` [p.50]	The `Attr` node that was removed.

Exceptions

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly. NOT_FOUND_ERR: Raised if `oldAttr` is not an attribute of the element.

`getElementsByTagName`

Returns a `NodeList` [p.42] of all descendant elements with a given tag name, in the order in which they would be encountered in a preorder traversal of the `Element` tree.

Parameters

`DOMString` [p.19]	`name`	The name of the tag to match on. The special value "*" matches all tags.

Return Value

`NodeList` [p.42]	A list of matching `Element` nodes.

No Exceptions

`normalize`

Puts all `Text` [p.61] nodes in the full depth of the sub-tree underneath this `Element` into a "normal" form where only markup (e.g., tags, comments, processing instructions, CDATA sections, and entity references) separates `Text` nodes, i.e., there are no adjacent `Text` nodes. This can be used to ensure that the DOM view of a document is the same as if it were saved and re-loaded, and is useful when operations (such as XPointer lookups) that depend on a particular document tree structure are to be used.

No Parameters

No Return Value

No Exceptions

`getAttributeNS` introduced in **DOM Level 2**

Retrieves an attribute value by local name and namespace URI. HTML-only DOM implementations do not need to implement this method.

Parameters

`DOMString` [p.19]	`namespaceURI`	The *namespace URI* [p.436] of the attribute to retrieve. When it is `null` or an empty string, this method behaves like `getAttribute`.
`DOMString`	`localName`	The *local name* [p.435] of the attribute to retrieve.

Return Value

`DOMString` [p.19]	The `Attr` [p.50] value as a string, or an empty string if that attribute does not have a specified or default value.

No Exceptions

`setAttributeNS` introduced in **DOM Level 2**

Adds a new attribute. If an attribute with that local name and namespace URI is already present in the element, its value is changed to be that of the value parameter. This value is a simple string, it is not parsed as it is being set. So any markup (such as syntax to be recognized as an entity reference) is treated as literal text, and needs to be appropriately

escaped by the implementation when it is written out. In order to assign an attribute value that contains entity references, the user must create an `Attr` [p.50] node plus any `Text` [p.61] and `EntityReference` [p.65] nodes, build the appropriate subtree, and use `setAttributeNodeNS` or `setAttributeNode` to assign it as the value of an attribute. HTML-only DOM implementations do not need to implement this method.

Parameters

`DOMString` [p.19]	`namespaceURI`	The *namespace URI* [p.436] of the attribute to create or alter. When it is `null` or an empty string, this method behaves like `getAttribute`.
`DOMString`	`localName`	The *local name* [p.435] of the attribute to create or alter.
`DOMString`	`value`	The value to set in string form.

Exceptions

`DOMException` [p.21]	INVALID_CHARACTER_ERR: Raised if the specified name contains an invalid character. NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly.

No Return Value

`removeAttributeNS` introduced in **DOM Level 2**

Removes an attribute by local name and namespace URI. If the removed attribute has a default value it is immediately replaced. HTML-only DOM implementations do not need to implement this method.

Parameters

`DOMString` [p.19]	`namespacURI`	The *namespace URI* [p.436] of the attribute to remove. When it is `null` or an empty string, this method behaves like `removeAttribute`.
`DOMString`	`localName`	The *local name* [p.435] of the attribute to remove.

Exceptions

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly.

No Return Value

`getAttributeNodeNS` introduced in **DOM Level 2**

Retrieves an `Attr` [p.50] node by local name and namespace URI. HTML-only DOM implementations do not need to implement this method.

Parameters

`DOMString` [p.19]	`namespaceURI`	The *namespace URI* [p.436] of the attribute to retrieve. When it is `null` or an empty string, this method behaves like `getAttributeNode`.
`DOMString`	`localName`	The *local name* [p.435] of the attribute to retrieve.

Return Value

`Attr` [p.50]	The `Attr` node with the specified attribute local name and namespace URI or `null` if there is no such attribute.

No Exceptions

`setAttributeNodeNS` introduced in **DOM Level 2**

Adds a new attribute. If an attribute with that local name and namespace URI is already present in the element, it is replaced by the new one. HTML-only DOM implementations do not need to implement this method.

Parameters

`Attr` [p.50]	`newAttr`	The `Attr` node to add to the attribute list. When the node has no `namespaceURI`, this method behaves like `setAttributeNode`.

Return Value

`Attr` [p.50]	If the `newAttr` attribute replaces an existing attribute with the same *local name* [p.435] and *namespace URI* [p.436] , the previously existing `Attr` node is returned, otherwise `null` is returned.

Exceptions

`DOMException` [p.21]	WRONG_DOCUMENT_ERR: Raised if `newAttr` was created from a different document than the one that created the element. NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly. INUSE_ATTRIBUTE_ERR: Raised if `newAttr` is already an attribute of another `ElementNS` object. The DOM user must explicitly clone `Attr` [p.50] nodes to re-use them in other elements.

`getElementsByTagNameNS` introduced in **DOM Level 2**

Returns a `NodeList` [p.42] of all the `Elements` with a given local name and namespace URI in the order in which they would be encountered in a preorder traversal of the `Document` [p.25] tree, starting from this node. HTML-only DOM implementations do not need to implement this method.

Parameters

`DOMString` [p.19]	`namespaceURI`	The *namespace URI* [p.436] of the elements to match on. The special value "*" matches all namespaces. When it is `null` or an empty string, this method behaves like `getElementsByTagName`.
`DOMString`	`localName`	The *local name* [p.435] of the elements to match on. The special value "*" matches all local names.

Return Value

`NodeList` [p.42]	A new `NodeList` object containing all the matched `Elements`.

No Exceptions

Interface *Text*

The `Text` interface inherits from `CharacterData` [p.46] and represents the textual content (termed *character data* in XML) of an `Element` [p.52] or `Attr` [p.50] . If there is no markup inside an element's content, the text is contained in a single object implementing the `Text` interface that is the only child of the element. If there is markup, it is parsed into a list of elements and `Text` nodes that form the list of children of the element.

When a document is first made available via the DOM, there is only one `Text` node for each block of text. Users may create adjacent `Text` nodes that represent the contents of a given element without any intervening markup, but should be aware that there is no way to represent the separations between these nodes in XML or HTML, so they will not (in general) persist between DOM editing sessions. The `normalize()` method on `Element` [p.52] merges any such adjacent `Text` objects into a single node for each block of text; this is recommended before employing operations that depend on a particular document structure, such as navigation with `XPointers`.

IDL Definition

```
interface Text : CharacterData {
  Text               splitText(in unsigned long offset)
                                        raises(DOMException);
};
```

Methods

`splitText`

Breaks this `Text` node into two Text nodes at the specified offset, keeping both in the tree as siblings. This node then only contains all the content up to the `offset` point. And a new `Text` node, which is inserted as the next sibling of this node, contains all the content at and after the `offset` point.

Parameters

`unsigned long`	`offset`	The 16-bit unit offset at which to split, starting from 0.

Return Value

`Text` [p.59]	The new `Text` node.

Exceptions

`DOMException` [p.21]	INDEX_SIZE_ERR: Raised if the specified offset is negative or greater than the number of 16-bit units in `data`. NO_MODIFICATION_ALLOWED_ERR: Raised if this node is readonly.

Interface *Comment*

This interface inherits from `CharacterData` [p.46] and represents the content of a comment, i.e., all the characters between the starting '`<!--`' and ending '`-->`'. Note that this is the definition of a comment in XML, and, in practice, HTML, although some HTML tools may implement the full SGML comment structure.

IDL Definition

```
interface Comment : CharacterData {
};
```

1.3. Extended Interfaces

The interfaces defined here form part of the DOM Core specification, but objects that expose these interfaces will never be encountered in a DOM implementation that deals only with HTML. As such, HTML-only DOM implementations do not need to have objects that implement these interfaces.

A DOM application can use the `hasFeature` method of the `DOMImplementation` [p.22] interface to determine whether they are supported or not. The feature string for all the interfaces listed in this section is "XML".

Interface *CDATASection*

CDATA sections are used to escape blocks of text containing characters that would otherwise be regarded as markup. The only delimiter that is recognized in a CDATA section is the "]]>" string that ends the CDATA section. CDATA sections can not be nested. The primary purpose is for including material such as XML fragments, without needing to escape all the delimiters.

The `DOMString` [p.19] attribute of the `Text` [p.59] node holds the text that is contained by the CDATA section. Note that this *may* contain characters that need to be escaped outside of CDATA sections and that, depending on the character encoding ("charset") chosen for serialization, it may be impossible to write out some characters as part of a CDATA section.

The `CDATASection` interface inherits from the `CharacterData` [p.46] interface through the `Text` [p.59] interface. Adjacent `CDATASections` nodes are not merged by use of the `normalize` method of the `Element` [p.52] interface.

IDL Definition

```
interface CDATASection : Text {
};
```

Interface *DocumentType*

Each `Document` [p.25] has a `doctype` attribute whose value is either `null` or a `DocumentType` object. The `DocumentType` interface in the DOM Core provides an interface to the list of entities that are defined for the document, and little else because the effect of namespaces and the various XML scheme efforts on DTD representation are not clearly understood as of this writing.

The DOM Level 2 doesn't support editing `DocumentType` nodes.

IDL Definition

```
interface DocumentType : Node {
  readonly attribute DOMString        name;
  readonly attribute NamedNodeMap     entities;
  readonly attribute NamedNodeMap     notations;
  // Introduced in DOM Level 2:
  readonly attribute DOMString        publicID;
  // Introduced in DOM Level 2:
  readonly attribute DOMString        systemID;
};
```

Attributes

`name` of type `DOMString` [p.19] , readonly
: The name of DTD; i.e., the name immediately following the `DOCTYPE` keyword.

`entities` of type `NamedNodeMap` [p.43] , readonly
: A `NamedNodeMap` [p.43] containing the general entities, both external and internal, declared in the DTD. Duplicates are discarded. For example in:

```
<!DOCTYPE ex SYSTEM "ex.dtd" [
  <!ENTITY foo "foo">
  <!ENTITY bar "bar">
  <!ENTITY % baz "baz">
]>
<ex/>
```

the interface provides access to `foo` and `bar` but not `baz`. Every node in this map also implements the `Entity` [p.64] interface.
The DOM Level 2 does not support editing entities, therefore `entities` cannot be altered in any way.

`notations` of type `NamedNodeMap` [p.43] , readonly
: A `NamedNodeMap` [p.43] containing the notations declared in the DTD. Duplicates are discarded. Every node in this map also implements the `Notation` [p.64] interface.
The DOM Level 2 does not support editing notations, therefore `notations` cannot be altered in any way.

`publicID` of type `DOMString` [p.19] , readonly, introduced in **DOM Level 2**
: The public identifier of this document type.

`systemID` of type `DOMString` [p.19] , readonly, introduced in **DOM Level 2**
: The system identifier of this document type.

Interface *Notation*

This interface represents a notation declared in the DTD. A notation either declares, by name, the format of an unparsed entity (see section 4.7 of the XML 1.0 specification), or is used for formal declaration of Processing Instruction targets (see section 2.6 of the XML 1.0 specification). The `nodeName` attribute inherited from `Node` [p.34] is set to the declared name of the notation.

The DOM Level 1 does not support editing `Notation` nodes; they are therefore readonly.

A `Notation` node does not have any parent.

IDL Definition

```
interface Notation : Node {
  readonly attribute DOMString        publicId;
  readonly attribute DOMString        systemId;
};
```

Attributes

`publicId` of type `DOMString` [p.19] , readonly
: The public identifier of this notation. If the public identifier was not specified, this is `null`.

`systemId` of type `DOMString` [p.19] , readonly
: The system identifier of this notation. If the system identifier was not specified, this is `null`.

Interface *Entity*

This interface represents an entity, either parsed or unparsed, in an XML document. Note that this models the entity itself *not* the entity declaration. `Entity` declaration modeling has been left for a later Level of the DOM specification.

The `nodeName` attribute that is inherited from `Node` [p.34] contains the name of the entity.

An XML processor may choose to completely expand entities before the structure model is passed to the DOM; in this case there will be no `EntityReference` [p.65] nodes in the document tree.

XML does not mandate that a non-validating XML processor read and process entity declarations made in the external subset or declared in external parameter entities. This means that parsed entities declared in the external subset need not be expanded by some classes of applications, and that the replacement value of the entity may not be available. When the replacement value is available, the corresponding `Entity` node's child list represents the structure of that replacement text. Otherwise, the child list is empty.

The resolution of the children of the `Entity` (the replacement value) may be lazily evaluated; actions by the user (such as calling the `childNodes` method on the `Entity` Node) are assumed to trigger the evaluation.

The DOM Level 2 does not support editing `Entity` nodes; if a user wants to make changes to the contents of an `Entity`, every related `EntityReference` [p.65] node has to be replaced in the structure model by a clone of the `Entity`'s contents, and then the desired changes must be made to each of those clones instead. All the descendants of an `Entity` node are readonly.

An `Entity` node does not have any parent.

IDL Definition

```
interface Entity : Node {
  readonly attribute DOMString        publicId;
  readonly attribute DOMString        systemId;
  readonly attribute DOMString        notationName;
};
```

Attributes

`publicId` of type `DOMString` [p.19] , readonly
: The public identifier associated with the entity, if specified. If the public identifier was not specified, this is `null`.

`systemId` of type `DOMString` [p.19] , readonly
: The system identifier associated with the entity, if specified. If the system identifier was not specified, this is `null`.

`notationName` of type `DOMString` [p.19] , readonly
: For unparsed entities, the name of the notation for the entity. For parsed entities, this is `null`.

Interface *EntityReference*

`EntityReference` objects may be inserted into the structure model when an entity reference is in the source document, or when the user wishes to insert an entity reference. Note that character references and references to predefined entities are considered to be expanded by the HTML or XML processor so that characters are represented by their Unicode equivalent rather than by an entity reference. Moreover, the XML processor may completely expand references to entities while building the structure model, instead of providing `EntityReference` objects. If it does provide such objects, then for a given `EntityReference` node, it may be that there is no `Entity` [p.63] node representing the referenced entity; but if such an `Entity` exists, then the child list of the `EntityReference` node is the same as that of the `Entity` node. As with the `Entity` node, all descendants of the `EntityReference` are readonly.

The resolution of the children of the `EntityReference` (the replacement value of the referenced `Entity` [p.63]) may be lazily evaluated; actions by the user (such as calling the `childNodes` method on the `EntityReference` node) are assumed to trigger the evaluation.

IDL Definition

```
interface EntityReference : Node {
};
```

Interface *ProcessingInstruction*

The `ProcessingInstruction` interface represents a "processing instruction", used in XML as a way to keep processor-specific information in the text of the document.

IDL Definition

```
interface ProcessingInstruction : Node {
  readonly attribute DOMString        target;
           attribute DOMString        data;
                                        // raises(DOMException) on setting

};
```

Attributes

`target` of type `DOMString` [p.19] , readonly

The target of this processing instruction. XML defines this as being the first token following the markup that begins the processing instruction.

`data` of type `DOMString` [p.19]

The content of this processing instruction. This is from the first non white space character after the target to the character immediately preceding the `?>`.

Exceptions on setting

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised when the node is readonly.

2. Document Object Model HTML

Editors
Arnaud Le Hors, W3C
Mike Champion, ArborText (for DOM Level 1)
Vidur Apparao, Netscape (for DOM Level 1)
Scott Isaacs, Microsoft (for DOM Level 1 until January 1998)
Chris Wilson, Microsoft (for DOM Level 1 after January 1998)
Ian Jacobs, W3C (for DOM Level 1)

2.1. Introduction

This section extends the Core API to describe objects and methods specific to HTML documents. In general, the functionality needed to manipulate hierarchical document structures, elements, and attributes will be found in the core section; functionality that depends on the specific elements defined in HTML will be found in this section.

The goals of the HTML-specific DOM API are:

- to specialize and add functionality that relates specifically to HTML documents and elements.
- to address issues of backwards compatibility with the *DOM Level 0* [p.434] .
- to provide convenience mechanisms, where appropriate, for common and frequent operations on HTML documents.

The key differences between the core DOM and the HTML application of DOM is that the HTML Document Object Model exposes a number of convenience methods and properties that are consistent with the existing models and are more appropriate to script writers. In many cases, these enhancements are not applicable to a general DOM because they rely on the presence of a predefined DTD. The transitional and frameset DTDs for HTML 4.0 are assumed. Interoperability between implementations is only guaranteed for elements and attributes that are specified in these DTDs.

More specifically, this document includes the following specializations for HTML:

- An `HTMLDocument` [p.70] interface, derived from the core `Document` [p.25] interface. `HTMLDocument` specifies the operations and queries that can be made on a HTML document.
- An `HTMLElement` [p.74] interface, derived from the core `Element` [p.52] interface. `HTMLElement` specifies the operations and queries that can be made on any HTML element. Methods on `HTMLElement` include those that allow for the retrieval and modification of attributes that apply to all HTML elements.
- Specializations for all HTML elements that have attributes that extend beyond those specified in the `HTMLElement` [p.74] interface. For all such attributes, the derived interface for the element contains explicit methods for setting and getting the values.

The DOM Level 2 includes mechanisms to access and modify style specified through CSS and defines an event model that can be used with HTML documents.

The interfaces found within this section are not mandatory. A DOM application can use the `hasFeature` method of the `DOMImplementation` [p.22] interface to determine whether they are supported or not. The feature string for all the interfaces listed in this section is "HTML".

2.2. HTML Application of Core DOM

2.2.1. Naming Conventions

The HTML DOM follows a naming convention for properties, methods, events, collections, and data types. All names are defined as one or more English words concatenated together to form a single string.

2.2.1.1. Properties and Methods

The property or method name starts with the initial keyword in lowercase, and each subsequent word starts with a capital letter. For example, a property that returns document meta information such as the date the file was created might be named "fileDateCreated". In the ECMAScript binding, properties are exposed as properties of a given object. In Java, properties are exposed with get and set methods.

2.2.1.2. Non-HTML 4.0 interfaces and attributes

While most of the interfaces defined below can be mapped directly to elements defined in the HTML 4.0 Recommendation, some of them cannot. Similarly, not all attributes listed below have counterparts in the HTML 4.0 specification (and some do, but have been renamed to avoid conflicts with scripting languages). Interfaces and attribute definitions that have links to the HTML 4.0 specification have corresponding element and attribute definitions there; all others are added by this specification, either for convenience or backwards compatibility with *DOM Level 0* [p.434] implementations.

2.3. Miscellaneous Object Definitions

Interface *HTMLDOMImplementation* (introduced in **DOM Level 2**)

The `HTMLDOMImplementation` interface extends the `DOMImplementation` [p.22] interface with a method for creating an HTML document instance.

IDL Definition

```
// Introduced in DOM Level 2:
interface HTMLDOMImplementation : DOMImplementation {
  HTMLDocument       createHTMLDocument(in DOMString title);
};
```

Methods

`createHTMLDocument`

Creates an `HTMLDocument` [p.70] object with the minimal tree made of the following elements: `HTML`, `HEAD`, `TITLE`, and `BODY`.

Parameters

DOMString [p.19]	title	The title of the document to be set as the content of the TITLE element, through a child Text [p.59] node.

Return Value

HTMLDocument [p.70]	A new HTMLDocument object.

No Exceptions

Interface *HTMLCollection*

An HTMLCollection is a list of nodes. An individual node may be accessed by either ordinal index or the node's name or id attributes. *Note:* Collections in the HTML DOM are assumed to be *live* meaning that they are automatically updated when the underlying document is changed.

IDL Definition

```
interface HTMLCollection {
  readonly attribute unsigned long    length;
  Node               item(in unsigned long index);
  Node               namedItem(in DOMString name);
};
```

Attributes

length of type unsigned long, readonly

This attribute specifies the length or *size* of the list.

Methods

item

This method retrieves a node specified by ordinal index. Nodes are numbered in tree order (depth-first traversal order).

Parameters

unsigned long	index	The index of the node to be fetched. The index origin is 0.

Return Value

Node [p.34]	The Node at the corresponding position upon success. A value of null is returned if the index is out of range.

No Exceptions

namedItem

This method retrieves a Node [p.34] using a name. It first searches for a Node with a matching id attribute. If it doesn't find one, it then searches for a Node with a matching

`name` attribute, but only on those elements that are allowed a name attribute.
Parameters

`DOMString` [p.19]	`name`	The name of the `Node` [p.34] to be fetched.

Return Value

`Node` [p.34]	The `Node` with a `name` or `id` attribute whose value corresponds to the specified string. Upon failure (e.g., no node with this name exists), returns `null`.

No Exceptions

2.4. Objects related to HTML documents

Interface *HTMLDocument*

An `HTMLDocument` is the root of the HTML hierarchy and holds the entire content. Beside providing access to the hierarchy, it also provides some convenience methods for accessing certain sets of information from the document.

The following properties have been deprecated in favor of the corresponding ones for the BODY element:

- alinkColor
- background
- bgColor
- fgColor
- linkColor
- vlinkColor

IDL Definition

```
interface HTMLDocument : Document {
           attribute DOMString        title;
  readonly attribute DOMString        referrer;
  readonly attribute DOMString        domain;
  readonly attribute DOMString        URL;
           attribute HTMLElement      body;
  readonly attribute HTMLCollection   images;
  readonly attribute HTMLCollection   applets;
  readonly attribute HTMLCollection   links;
  readonly attribute HTMLCollection   forms;
  readonly attribute HTMLCollection   anchors;
           attribute DOMString        cookie;
  void               open();
  void               close();
  void               write(in DOMString text);
```

```
  void                writeln(in DOMString text);
  Element             getElementById(in DOMString elementId);
  NodeList            getElementsByName(in DOMString elementName);
};
```

Attributes

`title` of type `DOMString` [p.19]
: The title of a document as specified by the `TITLE` element in the head of the document.

`referrer` of type `DOMString` [p.19] , readonly
: Returns the URI of the page that linked to this page. The value is an empty string if the user navigated to the page directly (not through a link, but, for example, via a bookmark).

`domain` of type `DOMString` [p.19] , readonly
: The domain name of the server that served the document, or `null` if the server cannot be identified by a domain name.

`URL` of type `DOMString` [p.19] , readonly
: The complete URI of the document.

`body` of type `HTMLElement` [p.74]
: The element that contains the content for the document. In documents with `BODY` contents, returns the `BODY` element, and in frameset documents, this returns the outermost `FRAMESET` element.

`images` of type `HTMLCollection` [p.69] , readonly
: A collection of all the `IMG` elements in a document. The behavior is limited to `IMG` elements for backwards compatibility.

`applets` of type `HTMLCollection` [p.69] , readonly
: A collection of all the `OBJECT` elements that include applets and `APPLET` (*deprecated*) elements in a document.

`links` of type `HTMLCollection` [p.69] , readonly
: A collection of all `AREA` elements and anchor (`A`) elements in a document with a value for the `href` attribute.

`forms` of type `HTMLCollection` [p.69] , readonly
: A collection of all the forms of a document.

`anchors` of type `HTMLCollection` [p.69] , readonly
: A collection of all the anchor (`A`) elements in a document with a value for the `name` attribute.*Note.* For reasons of backwards compatibility, the returned set of anchors only contains those anchors created with the `name` attribute, not those created with the `id` attribute.

`cookie` of type `DOMString` [p.19]
: The cookies associated with this document. If there are none, the value is an empty string. Otherwise, the value is a string: a semicolon-delimited list of "name, value" pairs for all the

cookies associated with the page. For example, `name=value;expires=date`.

Methods

`open`

Note. This method and the ones following allow a user to add to or replace the structure model of a document using strings of unparsed HTML. At the time of writing alternate methods for providing similar functionality for both HTML and XML documents were being considered. The following methods may be deprecated at some point in the future in favor of a more general-purpose mechanism.

Open a document stream for writing. If a document exists in the target, this method clears it.

No Parameters

No Return Value

No Exceptions

`close`

Closes a document stream opened by `open()` and forces rendering.

No Parameters

No Return Value

No Exceptions

`write`

Write a string of text to a document stream opened by `open()`. The text is parsed into the document's structure model.

Parameters

`DOMString` [p.19]	`text`	The string to be parsed into some structure in the document structure model.

No Return Value

No Exceptions

`writeln`

Write a string of text followed by a newline character to a document stream opened by `open()`. The text is parsed into the document's structure model.

Parameters

`DOMString` [p.19]	`text`	The string to be parsed into some structure in the document structure model.

No Return Value

No Exceptions

`getElementById`

Returns the Element whose `id` is given by elementId. If no such element exists, returns `null`. Behavior is not defined if more than one element has this `id`.

Parameters

`DOMString` [p.19]	`elementId`	The unique `id` value for an element.

Return Value

`Element` [p.52]	The matching element.

No Exceptions

`getElementsByName`

Returns the (possibly empty) collection of elements whose `name` value is given by `elementName`.

Parameters

`DOMString` [p.19]	`elementName`	The `name` attribute value for an element.

Return Value

`NodeList` [p.42]	The matching elements.

No Exceptions

2.5. HTML Elements

2.5.1. Property Attributes

HTML attributes are exposed as properties on the element object. The name of the exposed property always uses the naming conventions, and is independent of the case of the attribute in the source document. The data type of the property is determined by the type of the attribute as determined by the HTML 4.0 transitional and frameset DTDs. The attributes have the semantics (including case-sensitivity) given in the HTML 4.0 specification.

The attributes are exposed as properties for compatibility with *DOM Level 0* [p.434] . This usage is deprecated because it can not be generalized to all possible attribute names, as is required both for XML and potentially for future versions of HTML. We recommend the use of generic methods on the core `Element` [p.52] interface for setting, getting and removing attributes.

DTD Data Type	Object Model Data Type
CDATA	DOMString
Value list (e.g., (left | right | center))	DOMString
one-value Value list (e.g., (border))	boolean
Number	long int

The return value of an attribute that has a data type that is a value list is always capitalized, independent of the case of the value in the source document. For example, if the value of the align attribute on a P element is "left" then it is returned as "Left". For attributes with the `CDATA` data type, the case of the return value is that given in the source document.

2.5.2. Naming Exceptions

To avoid name-space conflicts, an attribute with the same name as a keyword in one of our chosen binding languages is prefixed. For HTML, the prefix used is "html". For example, the `for` attribute of the `LABEL` element collides with loop construct naming conventions and is renamed `htmlFor`.

2.5.3. Exposing Element Type Names (tagName)

The element type names exposed through a property are in uppercase. For example, the body element type name is exposed through the "tagName" property as "BODY".

2.5.4. The HTMLElement interface

Interface *HTMLElement*

All HTML element interfaces derive from this class. Elements that only expose the HTML core attributes are represented by the base `HTMLElement` interface. These elements are as follows:

- HEAD
- special: SUB, SUP, SPAN, BDO
- font: TT, I, B, U, S, STRIKE, BIG, SMALL
- phrase: EM, STRONG, DFN, CODE, SAMP, KBD, VAR, CITE, ACRONYM, ABBR
- list: DD, DT
- NOFRAMES, NOSCRIPT
- ADDRESS, CENTER

Note. The `style` attribute for this interface is part of the Document Object Model CSS [p.125] . See the `HTMLElementCSS` [p.208] interface.

IDL Definition

```
interface HTMLElement : Element {
           attribute DOMString        id;
           attribute DOMString        title;
           attribute DOMString        lang;
           attribute DOMString        dir;
           attribute DOMString        className;
};
```

Attributes

`id` of type `DOMString` [p.19]
The element's identifier. See the id attribute definition in HTML 4.0.

`title` of type `DOMString` [p.19]
The element's advisory title. See the title attribute definition in HTML 4.0.

`lang` of type `DOMString` [p.19]
Language code defined in RFC 1766. See the lang attribute definition in HTML 4.0.

`dir` of type `DOMString` [p.19]
Specifies the base direction of directionally neutral text and the directionality of tables. See the dir attribute definition in HTML 4.0.

`className` of type `DOMString` [p.19]
The class attribute of the element. This attribute has been renamed due to conflicts with the "class" keyword exposed by many languages. See the class attribute definition in HTML 4.0.

2.5.5. Object definitions

Interface *HTMLHtmlElement*

Root of an HTML document. See the HTML element definition in HTML 4.0.
IDL Definition

```
interface HTMLHtmlElement : HTMLElement {
           attribute DOMString        version;
};
```

Attributes

`version` of type `DOMString` [p.19]
Version information about the document's DTD. See the version attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLHeadElement*

Document head information. See the HEAD element definition in HTML 4.0.
IDL Definition

```
interface HTMLHeadElement : HTMLElement {
           attribute DOMString        profile;
};
```

Attributes

`profile` of type `DOMString` [p.19]
URI designating a metadata profile. See the profile attribute definition in HTML 4.0.

Interface *HTMLLinkElement*

The `LINK` element specifies a link to an external resource, and defines this document's relationship to that resource (or vice versa). See the LINK element definition in HTML 4.0.

IDL Definition

```
interface HTMLLinkElement : HTMLElement {
           attribute boolean          disabled;
           attribute DOMString        charset;
           attribute DOMString        href;
           attribute DOMString        hreflang;
           attribute DOMString        media;
           attribute DOMString        rel;
           attribute DOMString        rev;
           attribute DOMString        target;
           attribute DOMString        type;
};
```

Attributes

`disabled` of type `boolean`
Enables/disables the link. This is currently only used for style sheet links, and may be used to activate or deactivate style sheets.

`charset` of type `DOMString` [p.19]
The character encoding of the resource being linked to. See the charset attribute definition in HTML 4.0.

`href` of type `DOMString` [p.19]
The URI of the linked resource. See the href attribute definition in HTML 4.0.

`hreflang` of type `DOMString` [p.19]
Language code of the linked resource. See the hreflang attribute definition in HTML 4.0.

`media` of type `DOMString` [p.19]
Designed for use with one or more target media. See the media attribute definition in HTML 4.0.

`rel` of type `DOMString` [p.19]
Forward link type. See the rel attribute definition in HTML 4.0.

`rev` of type `DOMString` [p.19]
Reverse link type. See the rev attribute definition in HTML 4.0.

`target` of type `DOMString` [p.19]
Frame to render the resource in. See the target attribute definition in HTML 4.0.

`type` of type `DOMString` [p.19]
Advisory content type. See the type attribute definition in HTML 4.0.

Interface *HTMLTitleElement*

The document title. See the TITLE element definition in HTML 4.0.

IDL Definition

```
interface HTMLTitleElement : HTMLElement {
           attribute DOMString        text;
};
```

Attributes

`text` of type `DOMString` [p.19]
The specified title as a string.

Interface *HTMLMetaElement*

This contains generic meta-information about the document. See the META element definition in HTML 4.0.

IDL Definition

```
interface HTMLMetaElement : HTMLElement {
           attribute DOMString        content;
           attribute DOMString        httpEquiv;
           attribute DOMString        name;
           attribute DOMString        scheme;
};
```

Attributes

`content` of type `DOMString` [p.19]
Associated information. See the content attribute definition in HTML 4.0.

`httpEquiv` of type `DOMString` [p.19]
HTTP response header name. See the http-equiv attribute definition in HTML 4.0.

`name` of type `DOMString` [p.19]
Meta information name. See the name attribute definition in HTML 4.0.

`scheme` of type `DOMString` [p.19]
Select form of content. See the scheme attribute definition in HTML 4.0.

Interface *HTMLBaseElement*

Document base URI. See the BASE element definition in HTML 4.0.

IDL Definition

```
interface HTMLBaseElement : HTMLElement {
           attribute DOMString        href;
           attribute DOMString        target;
};
```

Attributes

`href` of type `DOMString` [p.19]
The base URI See the href attribute definition in HTML 4.0.

`target` of type `DOMString` [p.19]
The default target frame. See the target attribute definition in HTML 4.0.

Interface *HTMLIsIndexElement*

This element is used for single-line text input. See the ISINDEX element definition in HTML 4.0. This element is deprecated in HTML 4.0.

IDL Definition

```
interface HTMLIsIndexElement : HTMLElement {
  readonly attribute HTMLFormElement  form;
           attribute DOMString        prompt;
};
```

Attributes

`form` of type `HTMLFormElement` [p.80] , readonly
Returns the `FORM` element containing this control. Returns `null` if this control is not within the context of a form.

`prompt` of type `DOMString` [p.19]
The prompt message. See the prompt attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLStyleElement*

Style information. See the STYLE element definition in HTML 4.0, the Document Object Model CSS [p.125] module and the `HTMLStyleElementStyle` interface in the Document Object Model StyleSheets [p.119] module.

IDL Definition

```
interface HTMLStyleElement : HTMLElement {
           attribute boolean          disabled;
           attribute DOMString        media;
           attribute DOMString        type;
};
```

Attributes

`disabled` of type `boolean`
Enables/disables the style sheet.

`media` of type `DOMString` [p.19]
Designed for use with one or more target media. See the media attribute definition in HTML 4.0.

`type` of type `DOMString` [p.19]
The style sheet language (Internet media type). See the type attribute definition in HTML 4.0.

Interface *HTMLBodyElement*

The HTML document body. This element is always present in the DOM API, even if the tags are not present in the source document. See the BODY element definition in HTML 4.0.

IDL Definition

```
interface HTMLBodyElement : HTMLElement {
           attribute DOMString        aLink;
           attribute DOMString        background;
           attribute DOMString        bgColor;
           attribute DOMString        link;
           attribute DOMString        text;
           attribute DOMString        vLink;
};
```

Attributes

`aLink` of type `DOMString` [p.19]
Color of active links (after mouse-button down, but before mouse-button up). See the alink attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`background` of type `DOMString` [p.19]
URI of the background texture tile image. See the background attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`bgColor` of type `DOMString` [p.19]
Document background color. See the bgcolor attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`link` of type `DOMString` [p.19]
Color of links that are not active and unvisited. See the link attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`text` of type `DOMString` [p.19]
Document text color. See the text attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`vLink` of type `DOMString` [p.19]
Color of links that have been visited by the user. See the vlink attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLFormElement*

The `FORM` element encompasses behavior similar to a collection and an element. It provides direct access to the contained input elements as well as the attributes of the form element. See the FORM element definition in HTML 4.0.

IDL Definition

```
interface HTMLFormElement : HTMLElement {
  readonly attribute HTMLCollection   elements;
  readonly attribute long             length;
           attribute DOMString        name;
           attribute DOMString        acceptCharset;
           attribute DOMString        action;
           attribute DOMString        enctype;
           attribute DOMString        method;
           attribute DOMString        target;
  void               submit();
  void               reset();
};
```

Attributes

`elements` of type `HTMLCollection` [p.69] , readonly
: Returns a collection of all control elements in the form.

`length` of type `long`, readonly
: The number of form controls in the form.

`name` of type `DOMString` [p.19]
: Names the form.

`acceptCharset` of type `DOMString` [p.19]
: List of character sets supported by the server. See the accept-charset attribute definition in HTML 4.0.

`action` of type `DOMString` [p.19]
: Server-side form handler. See the action attribute definition in HTML 4.0.

`enctype` of type `DOMString` [p.19]
: The content type of the submitted form, generally "application/x-www-form-urlencoded". See the enctype attribute definition in HTML 4.0.

`method` of type `DOMString` [p.19]
: HTTP method used to submit form. See the method attribute definition in HTML 4.0.

`target` of type `DOMString` [p.19]
: Frame to render the resource in. See the target attribute definition in HTML 4.0.

Methods

`submit`
: Submits the form. It performs the same action as a submit button.
No Parameters

No Return Value
No Exceptions

`reset`
Restores a form element's default values. It performs the same action as a reset button.
No Parameters
No Return Value
No Exceptions

Interface *HTMLSelectElement*

The select element allows the selection of an option. The contained options can be directly accessed through the select element as a collection. See the SELECT element definition in HTML 4.0.
IDL Definition

```
interface HTMLSelectElement : HTMLElement {
  readonly attribute DOMString        type;
           attribute long             selectedIndex;
           attribute DOMString        value;
  readonly attribute long             length;
  readonly attribute HTMLFormElement  form;
  readonly attribute HTMLCollection   options;
           attribute boolean          disabled;
           attribute boolean          multiple;
           attribute DOMString        name;
           attribute long             size;
           attribute long             tabIndex;
  void               add(in HTMLElement element,
                         in HTMLElement before);
  void               remove(in long index);
  void               blur();
  void               focus();
};
```

Attributes

`type` of type `DOMString` [p.19] , readonly
The type of this form control. This is the string "select-multiple" when the multiple attribute is `true` and the string "select-one" when `false`.

`selectedIndex` of type `long`
The ordinal index of the selected option. The value -1 is returned if no element is selected. If multiple options are selected, the index of the first selected option is returned.

`value` of type `DOMString` [p.19]
The current form control value.

`length` of type `long`, readonly
The number of options in this `SELECT`.

`form` of type `HTMLFormElement` [p.80] , readonly
: Returns the `FORM` element containing this control. Returns `null` if this control is not within the context of a form.

`options` of type `HTMLCollection` [p.69] , readonly
: The collection of `OPTION` elements contained by this element.

`disabled` of type `boolean`
: The control is unavailable in this context. See the disabled attribute definition in HTML 4.0.

`multiple` of type `boolean`
: If true, multiple `OPTION` elements may be selected in this `SELECT`. See the multiple attribute definition in HTML 4.0.

`name` of type `DOMString` [p.19]
: Form control or object name when submitted with a form. See the name attribute definition in HTML 4.0.

`size` of type `long`
: Number of visible rows. See the size attribute definition in HTML 4.0.

`tabIndex` of type `long`
: Index that represents the element's position in the tabbing order. See the tabindex attribute definition in HTML 4.0.

Methods

`add`
: Add a new element to the collection of `OPTION` elements for this `SELECT`.
Parameters

`HTMLElement` [p.74]	`element`	The element to add.
`HTMLElement`	`before`	The element to insert before, or `null` for the head of the list.

No Return Value
No Exceptions

`remove`
: Remove an element from the collection of `OPTION` elements for this `SELECT`. Does nothing if no element has the given index.
Parameters

`long`	`index`	The index of the item to remove.

No Return Value
No Exceptions

`blur`
Removes keyboard focus from this element.
No Parameters
No Return Value
No Exceptions

`focus`
Gives keyboard focus to this element.
No Parameters
No Return Value
No Exceptions

Interface *HTMLOptGroupElement*

Group options together in logical subdivisions. See the OPTGROUP element definition in HTML 4.0.

IDL Definition

```
interface HTMLOptGroupElement : HTMLElement {
           attribute boolean          disabled;
           attribute DOMString        label;
};
```

Attributes

`disabled` of type `boolean`
The control is unavailable in this context. See the disabled attribute definition in HTML 4.0.

`label` of type `DOMString` [p.19]
Assigns a label to this option group. See the label attribute definition in HTML 4.0.

Interface *HTMLOptionElement*

A selectable choice. See the OPTION element definition in HTML 4.0.

IDL Definition

```
interface HTMLOptionElement : HTMLElement {
  readonly attribute HTMLFormElement  form;
           attribute boolean          defaultSelected;
  readonly attribute DOMString        text;
  readonly attribute long             index;
           attribute boolean          disabled;
           attribute DOMString        label;
           attribute boolean          selected;
           attribute DOMString        value;
};
```

Attributes

`form` of type `HTMLFormElement` [p.80] , readonly
: Returns the `FORM` element containing this control. Returns `null` if this control is not within the context of a form.

`defaultSelected` of type `boolean`
: Represents the value of the HTML selected attribute. The value of this attribute does not change if the state of the corresponding form control, in an interactive user agent, changes. Changing `defaultSelected`, however, resets the state of the form control. See the selected attribute definition in HTML 4.0.

`text` of type `DOMString` [p.19] , readonly
: The text contained within the option element.

`index` of type `long`, readonly
: The index of this `OPTION` in its parent `SELECT`.

`disabled` of type `boolean`
: The control is unavailable in this context. See the disabled attribute definition in HTML 4.0.

`label` of type `DOMString` [p.19]
: Option label for use in hierarchical menus. See the label attribute definition in HTML 4.0.

`selected` of type `boolean`
: Represents the current state of the corresponding form control, in an interactive user agent. Changing this attribute changes the state of the form control, but does not change the value of the HTML selected attribute of the element.

`value` of type `DOMString` [p.19]
: The current form control value. See the value attribute definition in HTML 4.0.

Interface *HTMLInputElement*

Form control. *Note.* Depending upon the environment the page is being viewed, the value property may be read-only for the file upload input type. For the "password" input type, the actual value returned may be masked to prevent unauthorized use. See the INPUT element definition in HTML 4.0.

IDL Definition

```
interface HTMLInputElement : HTMLElement {
           attribute DOMString        defaultValue;
           attribute boolean          defaultChecked;
  readonly attribute HTMLFormElement  form;
           attribute DOMString        accept;
           attribute DOMString        accessKey;
           attribute DOMString        align;
           attribute DOMString        alt;
           attribute boolean          checked;
           attribute boolean          disabled;
```

```
           attribute long             maxLength;
           attribute DOMString        name;
           attribute boolean          readOnly;
           attribute DOMString        size;
           attribute DOMString        src;
           attribute long             tabIndex;
  readonly attribute DOMString        type;
           attribute DOMString        useMap;
           attribute DOMString        value;
  void               blur();
  void               focus();
  void               select();
  void               click();
};
```

Attributes

`defaultValue` of type `DOMString` [p.19]
: When the `type` attribute of the element has the value "Text", "File" or "Password", this represents the HTML value attribute of the element. The value of this attribute does not change if the contents of the corresponding form control, in an interactive user agent, changes. Changing this attribute, however, resets the contents of the form control. See the value attribute definition in HTML 4.0.

`defaultChecked` of type `boolean`
: When `type` has the value "Radio" or "Checkbox", his represents the HTML checked attribute of the element. The value of this attribute does not change if the state of the corresponding form control, in an interactive user agent, changes. Changes to this attribute, however, resets the state of the form control. See the checked attribute definition in HTML 4.0.

`form` of type `HTMLFormElement` [p.80] , readonly
: Returns the `FORM` element containing this control. Returns `null` if this control is not within the context of a form.

`accept` of type `DOMString` [p.19]
: A comma-separated list of content types that a server processing this form will handle correctly. See the accept attribute definition in HTML 4.0.

`accessKey` of type `DOMString` [p.19]
: A single character access key to give access to the form control. See the accesskey attribute definition in HTML 4.0.

`align` of type `DOMString` [p.19]
: Aligns this object (vertically or horizontally) with respect to its surrounding text. See the align attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`alt` of type `DOMString` [p.19]
: Alternate text for user agents not rendering the normal content of this element. See the alt attribute definition in HTML 4.0.

`checked` of type `boolean`
: When the `type` attribute of the element has the value "Radio" or "Checkbox", this represents the current state of the form control, in an interactive user agent. Changes to this attribute changes the state of the form control, but does not change the value of the HTML value attribute of the element.

`disabled` of type `boolean`
: The control is unavailable in this context. See the disabled attribute definition in HTML 4.0.

`maxLength` of type `long`
: Maximum number of characters for text fields, when `type` has the value "Text" or "Password". See the maxlength attribute definition in HTML 4.0.

`name` of type `DOMString` [p.19]
: Form control or object name when submitted with a form. See the name attribute definition in HTML 4.0.

`readOnly` of type `boolean`
: This control is read-only. When `type` has the value "text" or "password" only. See the readonly attribute definition in HTML 4.0.

`size` of type `DOMString` [p.19]
: Size information. The precise meaning is specific to each type of field. See the size attribute definition in HTML 4.0.

`src` of type `DOMString` [p.19]
: When the `type` attribute has the value "Image", this attribute specifies the location of the image to be used to decorate the graphical submit button. See the src attribute definition in HTML 4.0.

`tabIndex` of type `long`
: Index that represents the element's position in the tabbing order. See the tabindex attribute definition in HTML 4.0.

`type` of type `DOMString` [p.19] , readonly
: The type of control created. See the type attribute definition in HTML 4.0.

`useMap` of type `DOMString` [p.19]
: Use client-side image map. See the usemap attribute definition in HTML 4.0.

`value` of type `DOMString` [p.19]
: When the `type` attribute of the element has the value "Text", "File" or "Password", this represents the current contents of the corresponding form control, in an interactive user agent. Changing this attribute changes the contents of the form control, but does not change the value of the HTML value attribute of the element. When the `type` attribute of the element has the value "Button", "Hidden", "Submit", "Reset", "Image", "Checkbox" or "Radio", this represents the HTML value attribute of the element. See the value attribute

definition in HTML 4.0.

Methods

`blur`

Removes keyboard focus from this element.

No Parameters

No Return Value

No Exceptions

`focus`

Gives keyboard focus to this element.

No Parameters

No Return Value

No Exceptions

`select`

Select the contents of the text area. For `INPUT` elements whose `type` attribute has one of the following values: "Text", "File", or "Password".

No Parameters

No Return Value

No Exceptions

`click`

Simulate a mouse-click. For `INPUT` elements whose `type` attribute has one of the following values: "Button", "Checkbox", "Radio", "Reset", or "Submit".

No Parameters

No Return Value

No Exceptions

Interface *HTMLTextAreaElement*

Multi-line text field. See the TEXTAREA element definition in HTML 4.0.

IDL Definition

```
interface HTMLTextAreaElement : HTMLElement {
           attribute DOMString        defaultValue;
  readonly attribute HTMLFormElement  form;
           attribute DOMString        accessKey;
           attribute long             cols;
           attribute boolean          disabled;
           attribute DOMString        name;
           attribute boolean          readOnly;
           attribute long             rows;
           attribute long             tabIndex;
  readonly attribute DOMString        type;
           attribute DOMString        value;
  void               blur();
  void               focus();
  void               select();
};
```

Attributes

`defaultValue` of type `DOMString` [p.19]
: Represents the contents of the element. The value of this attribute does not change if the contents of the corresponding form control, in an interactive user agent, changes. Changing this attribute, however, resets the contents of the form control.

`form` of type `HTMLFormElement` [p.80] , readonly
: Returns the `FORM` element containing this control. Returns `null` if this control is not within the context of a form.

`accessKey` of type `DOMString` [p.19]
: A single character access key to give access to the form control. See the accesskey attribute definition in HTML 4.0.

`cols` of type `long`
: Width of control (in characters). See the cols attribute definition in HTML 4.0.

`disabled` of type `boolean`
: The control is unavailable in this context. See the disabled attribute definition in HTML 4.0.

`name` of type `DOMString` [p.19]
: Form control or object name when submitted with a form. See the name attribute definition in HTML 4.0.

`readOnly` of type `boolean`
: This control is read-only. See the readonly attribute definition in HTML 4.0.

`rows` of type `long`
: Number of text rows. See the rows attribute definition in HTML 4.0.

`tabIndex` of type `long`
: Index that represents the element's position in the tabbing order. See the tabindex attribute definition in HTML 4.0.

`type` of type `DOMString` [p.19] , readonly
: The type of this form control. This the string "textarea".

`value` of type `DOMString` [p.19]
: Represents the current contents of the corresponding form control, in an interactive user agent. Changing this attribute changes the contents of the form control, but does not change the contents of the element. If the entirety of the data can not fit into a single `DOMString` [p.19] , the implementation may truncate the data.

Methods

`blur`
: Removes keyboard focus from this element.
No Parameters

No Return Value
No Exceptions

`focus`
Gives keyboard focus to this element.
No Parameters
No Return Value
No Exceptions

`select`
Select the contents of the `TEXTAREA`.
No Parameters
No Return Value
No Exceptions

Interface *HTMLButtonElement*

Push button. See the BUTTON element definition in HTML 4.0.

IDL Definition

```
interface HTMLButtonElement : HTMLElement {
  readonly attribute HTMLFormElement  form;
           attribute DOMString        accessKey;
           attribute boolean          disabled;
           attribute DOMString        name;
           attribute long             tabIndex;
  readonly attribute DOMString        type;
           attribute DOMString        value;
};
```

Attributes

`form` of type `HTMLFormElement` [p.80] , readonly
Returns the `FORM` element containing this control. Returns `null` if this control is not within the context of a form.

`accessKey` of type `DOMString` [p.19]
A single character access key to give access to the form control. See the accesskey attribute definition in HTML 4.0.

`disabled` of type `boolean`
The control is unavailable in this context. See the disabled attribute definition in HTML 4.0.

`name` of type `DOMString` [p.19]
Form control or object name when submitted with a form. See the name attribute definition in HTML 4.0.

`tabIndex` of type `long`
Index that represents the element's position in the tabbing order. See the tabindex attribute definition in HTML 4.0.

`type` of type `DOMString` [p.19] , readonly
The type of button. See the type attribute definition in HTML 4.0.

`value` of type `DOMString` [p.19]
The current form control value. See the value attribute definition in HTML 4.0.

Interface *HTMLLabelElement*

Form field label text. See the LABEL element definition in HTML 4.0.

IDL Definition

```
interface HTMLLabelElement : HTMLElement {
  readonly attribute HTMLFormElement  form;
           attribute DOMString        accessKey;
           attribute DOMString        htmlFor;
};
```

Attributes

`form` of type `HTMLFormElement` [p.80] , readonly
Returns the `FORM` element containing this control. Returns `null` if this control is not within the context of a form.

`accessKey` of type `DOMString` [p.19]
A single character access key to give access to the form control. See the accesskey attribute definition in HTML 4.0.

`htmlFor` of type `DOMString` [p.19]
This attribute links this label with another form control by `id` attribute. See the for attribute definition in HTML 4.0.

Interface *HTMLFieldSetElement*

Organizes form controls into logical groups. See the FIELDSET element definition in HTML 4.0.

IDL Definition

```
interface HTMLFieldSetElement : HTMLElement {
  readonly attribute HTMLFormElement  form;
};
```

Attributes

`form` of type `HTMLFormElement` [p.80] , readonly
Returns the `FORM` element containing this control. Returns `null` if this control is not within the context of a form.

Interface *HTMLLegendElement*

Provides a caption for a `FIELDSET` grouping. See the LEGEND element definition in HTML 4.0.

IDL Definition

```
interface HTMLLegendElement : HTMLElement {
  readonly attribute HTMLFormElement  form;
           attribute DOMString        accessKey;
           attribute DOMString        align;
};
```

Attributes

`form` of type `HTMLFormElement` [p.80] , readonly
: Returns the `FORM` element containing this control. Returns `null` if this control is not within the context of a form.

`accessKey` of type `DOMString` [p.19]
: A single character access key to give access to the form control. See the accesskey attribute definition in HTML 4.0.

`align` of type `DOMString` [p.19]
: Text alignment relative to `FIELDSET`. See the align attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLUListElement*

Unordered list. See the UL element definition in HTML 4.0.

IDL Definition

```
interface HTMLUListElement : HTMLElement {
           attribute boolean          compact;
           attribute DOMString        type;
};
```

Attributes

`compact` of type `boolean`
: Reduce spacing between list items. See the compact attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`type` of type `DOMString` [p.19]
: Bullet style. See the type attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLOListElement*

Ordered list. See the OL element definition in HTML 4.0.

IDL Definition

```
interface HTMLOListElement : HTMLElement {
           attribute boolean          compact;
           attribute long             start;
           attribute DOMString        type;
};
```

Attributes

`compact` of type `boolean`
: Reduce spacing between list items. See the compact attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`start` of type `long`
: Starting sequence number. See the start attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`type` of type `DOMString` [p.19]
: Numbering style. See the type attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLDListElement*

Definition list. See the DL element definition in HTML 4.0.

IDL Definition

```
interface HTMLDListElement : HTMLElement {
           attribute boolean          compact;
};
```

Attributes

`compact` of type `boolean`
: Reduce spacing between list items. See the compact attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLDirectoryElement*

Directory list. See the DIR element definition in HTML 4.0. This element is deprecated in HTML 4.0.

IDL Definition

```
interface HTMLDirectoryElement : HTMLElement {
           attribute boolean          compact;
};
```

Attributes

`compact` of type `boolean`
: Reduce spacing between list items. See the compact attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLMenuElement*

Menu list. See the MENU element definition in HTML 4.0. This element is deprecated in HTML 4.0.

IDL Definition

```
interface HTMLMenuElement : HTMLElement {
           attribute boolean          compact;
};
```

Attributes

`compact` of type `boolean`

Reduce spacing between list items. See the compact attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLLIElement*

List item. See the LI element definition in HTML 4.0.

IDL Definition

```
interface HTMLLIElement : HTMLElement {
           attribute DOMString        type;
           attribute long             value;
};
```

Attributes

`type` of type `DOMString` [p.19]

List item bullet style. See the type attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`value` of type `long`

Reset sequence number when used in `OL` See the value attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLDivElement*

Generic block container. See the DIV element definition in HTML 4.0.

IDL Definition

```
interface HTMLDivElement : HTMLElement {
           attribute DOMString        align;
};
```

Attributes

`align` of type `DOMString` [p.19]

Horizontal text alignment. See the align attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLParagraphElement*

Paragraphs. See the P element definition in HTML 4.0.

IDL Definition

```
interface HTMLParagraphElement : HTMLElement {
           attribute DOMString        align;
};
```

Attributes

`align` of type `DOMString` [p.19]

Horizontal text alignment. See the align attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLHeadingElement*

For the `H1` to `H6` elements. See the H1 element definition in HTML 4.0.

IDL Definition

```
interface HTMLHeadingElement : HTMLElement {
           attribute DOMString        align;
};
```

Attributes

`align` of type `DOMString` [p.19]

Horizontal text alignment. See the align attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLQuoteElement*

For the `Q` and `BLOCKQUOTE` elements. See the Q element definition in HTML 4.0.

IDL Definition

```
interface HTMLQuoteElement : HTMLElement {
           attribute DOMString        cite;
};
```

Attributes

`cite` of type `DOMString` [p.19]

A URI designating a document that designates a source document or message. See the cite attribute definition in HTML 4.0.

Interface *HTMLPreElement*

Preformatted text. See the PRE element definition in HTML 4.0.

IDL Definition

```
interface HTMLPreElement : HTMLElement {
           attribute long             width;
};
```

Attributes

`width` of type `long`

Fixed width for content. See the width attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLBRElement*

Force a line break. See the BR element definition in HTML 4.0.

IDL Definition

```
interface HTMLBRElement : HTMLElement {
           attribute DOMString        clear;
};
```

Attributes

`clear` of type `DOMString` [p.19]
: Control flow of text around floats. See the clear attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLBaseFontElement*

Base font. See the BASEFONT element definition in HTML 4.0. This element is deprecated in HTML 4.0.

IDL Definition

```
interface HTMLBaseFontElement : HTMLElement {
           attribute DOMString        color;
           attribute DOMString        face;
           attribute DOMString        size;
};
```

Attributes

`color` of type `DOMString` [p.19]
: Font color. See the color attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`face` of type `DOMString` [p.19]
: Font face identifier. See the face attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`size` of type `DOMString` [p.19]
: Font size. See the size attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLFontElement*

Local change to font. See the FONT element definition in HTML 4.0. This element is deprecated in HTML 4.0.

IDL Definition

```
interface HTMLFontElement : HTMLElement {
           attribute DOMString        color;
           attribute DOMString        face;
           attribute DOMString        size;
};
```

Attributes

`color` of type `DOMString` [p.19]
: Font color. See the color attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`face` of type `DOMString` [p.19]
: Font face identifier. See the face attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`size` of type `DOMString` [p.19]
Font size. See the size attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLHRElement*

Create a horizontal rule. See the HR element definition in HTML 4.0.

IDL Definition

```
interface HTMLHRElement : HTMLElement {
           attribute DOMString        align;
           attribute boolean          noShade;
           attribute DOMString        size;
           attribute DOMString        width;
};
```

Attributes

`align` of type `DOMString` [p.19]
Align the rule on the page. See the align attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`noShade` of type `boolean`
Indicates to the user agent that there should be no shading in the rendering of this element. See the noshade attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`size` of type `DOMString` [p.19]
The height of the rule. See the size attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`width` of type `DOMString` [p.19]
The width of the rule. See the width attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLModElement*

Notice of modification to part of a document. See the INS and DEL element definitions in HTML 4.0.

IDL Definition

```
interface HTMLModElement : HTMLElement {
           attribute DOMString        cite;
           attribute DOMString        dateTime;
};
```

Attributes

`cite` of type `DOMString` [p.19]
A URI designating a document that describes the reason for the change. See the cite attribute definition in HTML 4.0.

`dateTime` of type `DOMString` [p.19]
The date and time of the change. See the datetime attribute definition in HTML 4.0.

Interface *HTMLAnchorElement*

The anchor element. See the A element definition in HTML 4.0.

IDL Definition

```
interface HTMLAnchorElement : HTMLElement {
           attribute DOMString        accessKey;
           attribute DOMString        charset;
           attribute DOMString        coords;
           attribute DOMString        href;
           attribute DOMString        hreflang;
           attribute DOMString        name;
           attribute DOMString        rel;
           attribute DOMString        rev;
           attribute DOMString        shape;
           attribute long             tabIndex;
           attribute DOMString        target;
           attribute DOMString        type;
  void               blur();
  void               focus();
};
```

Attributes

`accessKey` of type `DOMString` [p.19]
A single character access key to give access to the form control. See the accesskey attribute definition in HTML 4.0.

`charset` of type `DOMString` [p.19]
The character encoding of the linked resource. See the charset attribute definition in HTML 4.0.

`coords` of type `DOMString` [p.19]
Comma-separated list of lengths, defining an active region geometry. See also `shape` for the shape of the region. See the coords attribute definition in HTML 4.0.

`href` of type `DOMString` [p.19]
The URI of the linked resource. See the href attribute definition in HTML 4.0.

`hreflang` of type `DOMString` [p.19]
Language code of the linked resource. See the hreflang attribute definition in HTML 4.0.

`name` of type `DOMString` [p.19]
Anchor name. See the name attribute definition in HTML 4.0.

`rel` of type `DOMString` [p.19]
Forward link type. See the rel attribute definition in HTML 4.0.

`rev` of type `DOMString` [p.19]
Reverse link type. See the rev attribute definition in HTML 4.0.

`shape` of type `DOMString` [p.19]
The shape of the active area. The coordinates are given by `coords`. See the shape attribute definition in HTML 4.0.

`tabIndex` of type `long`
Index that represents the element's position in the tabbing order. See the tabindex attribute definition in HTML 4.0.

`target` of type `DOMString` [p.19]
Frame to render the resource in. See the target attribute definition in HTML 4.0.

`type` of type `DOMString` [p.19]
Advisory content type. See the type attribute definition in HTML 4.0.

Methods

`blur`
Removes keyboard focus from this element.
No Parameters
No Return Value
No Exceptions

`focus`
Gives keyboard focus to this element.
No Parameters
No Return Value
No Exceptions

Interface *HTMLImageElement*

Embedded image. See the IMG element definition in HTML 4.0.

IDL Definition

```
interface HTMLImageElement : HTMLElement {
           attribute DOMString        lowSrc;
           attribute DOMString        name;
           attribute DOMString        align;
           attribute DOMString        alt;
           attribute DOMString        border;
           attribute DOMString        height;
           attribute DOMString        hspace;
           attribute boolean          isMap;
           attribute DOMString        longDesc;
           attribute DOMString        src;
           attribute DOMString        useMap;
           attribute DOMString        vspace;
           attribute DOMString        width;
};
```

Attributes

`lowSrc` of type `DOMString` [p.19]
URI designating the source of this image, for low-resolution output.

`name` of type `DOMString` [p.19]
The name of the element (for backwards compatibility).

`align` of type `DOMString` [p.19]
Aligns this object (vertically or horizontally) with respect to its surrounding text. See the align attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`alt` of type `DOMString` [p.19]
Alternate text for user agents not rendering the normal content of this element. See the alt attribute definition in HTML 4.0.

`border` of type `DOMString` [p.19]
Width of border around image. See the border attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`height` of type `DOMString` [p.19]
Override height. See the height attribute definition in HTML 4.0.

`hspace` of type `DOMString` [p.19]
Horizontal space to the left and right of this image. See the hspace attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`isMap` of type `boolean`
Use server-side image map. See the ismap attribute definition in HTML 4.0.

`longDesc` of type `DOMString` [p.19]
URI designating a long description of this image or frame. See the longdesc attribute definition in HTML 4.0.

`src` of type `DOMString` [p.19]
URI designating the source of this image. See the src attribute definition in HTML 4.0.

`useMap` of type `DOMString` [p.19]
Use client-side image map. See the usemap attribute definition in HTML 4.0.

`vspace` of type `DOMString` [p.19]
Vertical space above and below this image. See the vspace attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`width` of type `DOMString` [p.19]
Override width. See the width attribute definition in HTML 4.0.

Interface *HTMLObjectElement*

Generic embedded object. *Note.* In principle, all properties on the object element are read-write but in some environments some properties may be read-only once the underlying object is instantiated. See the OBJECT element definition in HTML 4.0.

IDL Definition

```
interface HTMLObjectElement : HTMLElement {
  readonly attribute HTMLFormElement  form;
           attribute DOMString        code;
           attribute DOMString        align;
           attribute DOMString        archive;
           attribute DOMString        border;
           attribute DOMString        codeBase;
           attribute DOMString        codeType;
           attribute DOMString        data;
           attribute boolean          declare;
           attribute DOMString        height;
           attribute DOMString        hspace;
           attribute DOMString        name;
           attribute DOMString        standby;
           attribute long             tabIndex;
           attribute DOMString        type;
           attribute DOMString        useMap;
           attribute DOMString        vspace;
           attribute DOMString        width;
};
```

Attributes

`form` of type `HTMLFormElement` [p.80] , readonly
: Returns the `FORM` element containing this control. Returns `null` if this control is not within the context of a form.

`code` of type `DOMString` [p.19]
: Applet class file. See the `code` attribute for HTMLAppletElement.

`align` of type `DOMString` [p.19]
: Aligns this object (vertically or horizontally) with respect to its surrounding text. See the align attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`archive` of type `DOMString` [p.19]
: Space-separated list of archives. See the archive attribute definition in HTML 4.0.

`border` of type `DOMString` [p.19]
: Width of border around the object. See the border attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`codeBase` of type `DOMString` [p.19]
: Base URI for `classid`, `data`, and `archive` attributes. See the codebase attribute definition in HTML 4.0.

`codeType` of type `DOMString` [p.19]
: Content type for data downloaded via `classid` attribute. See the codetype attribute definition in HTML 4.0.

`data` of type `DOMString` [p.19]
: A URI specifying the location of the object's data. See the data attribute definition in HTML 4.0.

`declare` of type `boolean`
: Declare (for future reference), but do not instantiate, this object. See the declare attribute definition in HTML 4.0.

`height` of type `DOMString` [p.19]
: Override height. See the height attribute definition in HTML 4.0.

`hspace` of type `DOMString` [p.19]
: Horizontal space to the left and right of this image, applet, or object. See the hspace attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`name` of type `DOMString` [p.19]
: Form control or object name when submitted with a form. See the name attribute definition in HTML 4.0.

`standby` of type `DOMString` [p.19]
: Message to render while loading the object. See the standby attribute definition in HTML 4.0.

`tabIndex` of type `long`
: Index that represents the element's position in the tabbing order. See the tabindex attribute definition in HTML 4.0.

`type` of type `DOMString` [p.19]
: Content type for data downloaded via `data` attribute. See the type attribute definition in HTML 4.0.

`useMap` of type `DOMString` [p.19]
: Use client-side image map. See the usemap attribute definition in HTML 4.0.

`vspace` of type `DOMString` [p.19]
: Vertical space above and below this image, applet, or object. See the vspace attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`width` of type `DOMString` [p.19]
: Override width. See the width attribute definition in HTML 4.0.

Interface *HTMLParamElement*

Parameters fed to the OBJECT element. See the PARAM element definition in HTML 4.0.

IDL Definition

```
interface HTMLParamElement : HTMLElement {
           attribute DOMString        name;
           attribute DOMString        type;
           attribute DOMString        value;
           attribute DOMString        valueType;
};
```

Attributes

name of type DOMString [p.19]
: The name of a run-time parameter. See the name attribute definition in HTML 4.0.

type of type DOMString [p.19]
: Content type for the value attribute when valuetype has the value "ref". See the type attribute definition in HTML 4.0.

value of type DOMString [p.19]
: The value of a run-time parameter. See the value attribute definition in HTML 4.0.

valueType of type DOMString [p.19]
: Information about the meaning of the value attribute value. See the valuetype attribute definition in HTML 4.0.

Interface *HTMLAppletElement*

An embedded Java applet. See the APPLET element definition in HTML 4.0. This element is deprecated in HTML 4.0.

IDL Definition

```
interface HTMLAppletElement : HTMLElement {
           attribute DOMString        align;
           attribute DOMString        alt;
           attribute DOMString        archive;
           attribute DOMString        code;
           attribute DOMString        codeBase;
           attribute DOMString        height;
           attribute DOMString        hspace;
           attribute DOMString        name;
           attribute DOMString        object;
           attribute DOMString        vspace;
           attribute DOMString        width;
};
```

Attributes

align of type DOMString [p.19]
: Aligns this object (vertically or horizontally) with respect to its surrounding text. See the align attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`alt` of type `DOMString` [p.19]
: Alternate text for user agents not rendering the normal content of this element. See the alt attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`archive` of type `DOMString` [p.19]
: Comma-separated archive list. See the archive attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`code` of type `DOMString` [p.19]
: Applet class file. See the code attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`codeBase` of type `DOMString` [p.19]
: Optional base URI for applet. See the codebase attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`height` of type `DOMString` [p.19]
: Override height. See the height attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`hspace` of type `DOMString` [p.19]
: Horizontal space to the left and right of this image, applet, or object. See the hspace attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`name` of type `DOMString` [p.19]
: The name of the applet. See the name attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`object` of type `DOMString` [p.19]
: Serialized applet file. See the object attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`vspace` of type `DOMString` [p.19]
: Vertical space above and below this image, applet, or object. See the vspace attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`width` of type `DOMString` [p.19]
: Override width. See the width attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLMapElement*

Client-side image map. See the MAP element definition in HTML 4.0.

IDL Definition

```
interface HTMLMapElement : HTMLElement {
  readonly attribute HTMLCollection   areas;
           attribute DOMString        name;
};
```

Attributes

`areas` of type `HTMLCollection` [p.69] , readonly
: The list of areas defined for the image map.

`name` of type `DOMString` [p.19]
: Names the map (for use with `usemap`). See the name attribute definition in HTML 4.0.

Interface *HTMLAreaElement*

Client-side image map area definition. See the AREA element definition in HTML 4.0.

IDL Definition

```
interface HTMLAreaElement : HTMLElement {
           attribute DOMString        accessKey;
           attribute DOMString        alt;
           attribute DOMString        coords;
           attribute DOMString        href;
           attribute boolean          noHref;
           attribute DOMString        shape;
           attribute long             tabIndex;
           attribute DOMString        target;
};
```

Attributes

`accessKey` of type `DOMString` [p.19]
: A single character access key to give access to the form control. See the accesskey attribute definition in HTML 4.0.

`alt` of type `DOMString` [p.19]
: Alternate text for user agents not rendering the normal content of this element. See the alt attribute definition in HTML 4.0.

`coords` of type `DOMString` [p.19]
: Comma-separated list of lengths, defining an active region geometry. See also `shape` for the shape of the region. See the coords attribute definition in HTML 4.0.

`href` of type `DOMString` [p.19]
: The URI of the linked resource. See the href attribute definition in HTML 4.0.

`noHref` of type `boolean`
: Specifies that this area is inactive, i.e., has no associated action. See the nohref attribute definition in HTML 4.0.

`shape` of type `DOMString` [p.19]
: The shape of the active area. The coordinates are given by `coords`. See the shape attribute definition in HTML 4.0.

`tabIndex` of type `long`
: Index that represents the element's position in the tabbing order. See the tabindex attribute definition in HTML 4.0.

`target` of type `DOMString` [p.19]
Frame to render the resource in. See the target attribute definition in HTML 4.0.

Interface *HTMLScriptElement*

Script statements. See the SCRIPT element definition in HTML 4.0.

IDL Definition

```
interface HTMLScriptElement : HTMLElement {
           attribute DOMString        text;
           attribute DOMString        htmlFor;
           attribute DOMString        event;
           attribute DOMString        charset;
           attribute boolean          defer;
           attribute DOMString        src;
           attribute DOMString        type;
};
```

Attributes

`text` of type `DOMString` [p.19]
The script content of the element.

`htmlFor` of type `DOMString` [p.19]
Reserved for future use.

`event` of type `DOMString` [p.19]
Reserved for future use.

`charset` of type `DOMString` [p.19]
The character encoding of the linked resource. See the charset attribute definition in HTML 4.0.

`defer` of type `boolean`
Indicates that the user agent can defer processing of the script. See the defer attribute definition in HTML 4.0.

`src` of type `DOMString` [p.19]
URI designating an external script. See the src attribute definition in HTML 4.0.

`type` of type `DOMString` [p.19]
The content type of the script language. See the type attribute definition in HTML 4.0.

Interface *HTMLTableElement*

The create* and delete* methods on the table allow authors to construct and modify tables. HTML 4.0 specifies that only one of each of the `CAPTION`, `THEAD`, and `TFOOT` elements may exist in a table. Therefore, if one exists, and the createTHead() or createTFoot() method is called, the method returns the existing THead or TFoot element. See the TABLE element definition in HTML 4.0.

IDL Definition

```
interface HTMLTableElement : HTMLElement {
           attribute HTMLTableCaptionElement  caption;
           attribute HTMLTableSectionElement  tHead;
           attribute HTMLTableSectionElement  tFoot;
  readonly attribute HTMLCollection   rows;
  readonly attribute HTMLCollection   tBodies;
           attribute DOMString        align;
           attribute DOMString        bgColor;
           attribute DOMString        border;
           attribute DOMString        cellPadding;
           attribute DOMString        cellSpacing;
           attribute DOMString        frame;
           attribute DOMString        rules;
           attribute DOMString        summary;
           attribute DOMString        width;
  HTMLElement        createTHead();
  void               deleteTHead();
  HTMLElement        createTFoot();
  void               deleteTFoot();
  HTMLElement        createCaption();
  void               deleteCaption();
  HTMLElement        insertRow(in long index);
  void               deleteRow(in long index);
};
```

Attributes

`caption` of type `HTMLTableCaptionElement` [p.109]
: Returns the table's `CAPTION`, or void if none exists.

`tHead` of type `HTMLTableSectionElement` [p.110]
: Returns the table's `THEAD`, or `null` if none exists.

`tFoot` of type `HTMLTableSectionElement` [p.110]
: Returns the table's `TFOOT`, or `null` if none exists.

`rows` of type `HTMLCollection` [p.69] , readonly
: Returns a collection of all the rows in the table, including all in `THEAD`, `TFOOT`, all `TBODY` elements.

`tBodies` of type `HTMLCollection` [p.69] , readonly
: Returns a collection of the defined table bodies.

`align` of type `DOMString` [p.19]
: Specifies the table's position with respect to the rest of the document. See the align attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`bgColor` of type `DOMString` [p.19]
: Cell background color. See the bgcolor attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`border` of type `DOMString` [p.19]
The width of the border around the table. See the border attribute definition in HTML 4.0.

`cellPadding` of type `DOMString` [p.19]
Specifies the horizontal and vertical space between cell content and cell borders. See the cellpadding attribute definition in HTML 4.0.

`cellSpacing` of type `DOMString` [p.19]
Specifies the horizontal and vertical separation between cells. See the cellspacing attribute definition in HTML 4.0.

`frame` of type `DOMString` [p.19]
Specifies which external table borders to render. See the frame attribute definition in HTML 4.0.

`rules` of type `DOMString` [p.19]
Specifies which internal table borders to render. See the rules attribute definition in HTML 4.0.

`summary` of type `DOMString` [p.19]
Supplementary description about the purpose or structure of a table. See the summary attribute definition in HTML 4.0.

`width` of type `DOMString` [p.19]
Specifies the desired table width. See the width attribute definition in HTML 4.0.

Methods

`createTHead`
Create a table header row or return an existing one.
Return Value

`HTMLElement` [p.74]	A new table header element (`THEAD`).

No Parameters
No Exceptions

`deleteTHead`
Delete the header from the table, if one exists.
No Parameters
No Return Value
No Exceptions

`createTFoot`
Create a table footer row or return an existing one.
Return Value

`HTMLElement` [p.74]	A footer element (`TFOOT`).

No Parameters
No Exceptions

`deleteTFoot`
Delete the footer from the table, if one exists.
No Parameters
No Return Value
No Exceptions

`createCaption`
Create a new table caption object or return an existing one.
Return Value

`HTMLElement` [p.74]	A `CAPTION` element.

No Parameters
No Exceptions

`deleteCaption`
Delete the table caption, if one exists.
No Parameters
No Return Value
No Exceptions

`insertRow`
Insert a new empty row in the table. *Note.* A table row cannot be empty according to HTML 4.0 Recommendation.
Parameters

`long`	`index`	The row number where to insert a new row.

Return Value

`HTMLElement` [p.74]	The newly created row.

No Exceptions

`deleteRow`
Delete a table row.
Parameters

`long`	`index`	The index of the row to be deleted.

No Return Value
No Exceptions

Interface *HTMLTableCaptionElement*

Table caption See the CAPTION element definition in HTML 4.0.

IDL Definition

```
interface HTMLTableCaptionElement : HTMLElement {
           attribute DOMString        align;
};
```

Attributes

`align` of type `DOMString` [p.19]
: Caption alignment with respect to the table. See the align attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLTableColElement*

Regroups the `COL` and `COLGROUP` elements. See the COL element definition in HTML 4.0.

IDL Definition

```
interface HTMLTableColElement : HTMLElement {
           attribute DOMString        align;
           attribute DOMString        ch;
           attribute DOMString        chOff;
           attribute long             span;
           attribute DOMString        vAlign;
           attribute DOMString        width;
};
```

Attributes

`align` of type `DOMString` [p.19]
: Horizontal alignment of cell data in column. See the align attribute definition in HTML 4.0.

`ch` of type `DOMString` [p.19]
: Alignment character for cells in a column. See the char attribute definition in HTML 4.0.

`chOff` of type `DOMString` [p.19]
: Offset of alignment character. See the charoff attribute definition in HTML 4.0.

`span` of type `long`
: Indicates the number of columns in a group or affected by a grouping. See the span attribute definition in HTML 4.0.

`vAlign` of type `DOMString` [p.19]
: Vertical alignment of cell data in column. See the valign attribute definition in HTML 4.0.

`width` of type `DOMString` [p.19]
: Default column width. See the width attribute definition in HTML 4.0.

Interface *HTMLTableSectionElement*

The `THEAD`, `TFOOT`, and `TBODY` elements.

IDL Definition

```
interface HTMLTableSectionElement : HTMLElement {
           attribute DOMString        align;
           attribute DOMString        ch;
           attribute DOMString        chOff;
           attribute DOMString        vAlign;
  readonly attribute HTMLCollection   rows;
  HTMLElement        insertRow(in long index);
  void               deleteRow(in long index);
};
```

Attributes

`align` of type `DOMString` [p.19]
: Horizontal alignment of data in cells. See the `align` attribute for HTMLTheadElement for details.

`ch` of type `DOMString` [p.19]
: Alignment character for cells in a column. See the char attribute definition in HTML 4.0.

`chOff` of type `DOMString` [p.19]
: Offset of alignment character. See the charoff attribute definition in HTML 4.0.

`vAlign` of type `DOMString` [p.19]
: Vertical alignment of data in cells. See the `valign` attribute for HTMLTheadElement for details.

`rows` of type `HTMLCollection` [p.69] , readonly
: The collection of rows in this table section.

Methods

`insertRow`
: Insert a row into this section.

  Parameters

`long`	`index`	The row number where to insert a new row.

  Return Value

`HTMLElement` [p.74]	The newly created row.

  No Exceptions

`deleteRow`
Delete a row from this section.
Parameters

`long`	`index`	The index of the row to be deleted.

No Return Value
No Exceptions

Interface *HTMLTableRowElement*

A row in a table. See the TR element definition in HTML 4.0.
IDL Definition

```
interface HTMLTableRowElement : HTMLElement {
  readonly attribute long             rowIndex;
  readonly attribute long             sectionRowIndex;
  readonly attribute HTMLCollection   cells;
           attribute DOMString        align;
           attribute DOMString        bgColor;
           attribute DOMString        ch;
           attribute DOMString        chOff;
           attribute DOMString        vAlign;
  HTMLElement        insertCell(in long index);
  void               deleteCell(in long index);
};
```

Attributes

`rowIndex` of type `long`, readonly
The index of this row, relative to the entire table.

`sectionRowIndex` of type `long`, readonly
The index of this row, relative to the current section (`THEAD`, `TFOOT`, or `TBODY`).

`cells` of type `HTMLCollection` [p.69] , readonly
The collection of cells in this row.

`align` of type `DOMString` [p.19]
Horizontal alignment of data within cells of this row. See the align attribute definition in HTML 4.0.

`bgColor` of type `DOMString` [p.19]
Background color for rows. See the bgcolor attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`ch` of type `DOMString` [p.19]
Alignment character for cells in a column. See the char attribute definition in HTML 4.0.

`chOff` of type `DOMString` [p.19]
Offset of alignment character. See the charoff attribute definition in HTML 4.0.

`vAlign` of type `DOMString` [p.19]
Vertical alignment of data within cells of this row. See the valign attribute definition in HTML 4.0.

Methods

`insertCell`
Insert an empty `TD` cell into this row.
Parameters

`long`	`index`	The place to insert the cell.

Return Value

`HTMLElement` [p.74]	The newly created cell.

No Exceptions

`deleteCell`
Delete a cell from the current row.
Parameters

`long`	`index`	The index of the cell to delete.

No Return Value
No Exceptions

Interface *HTMLTableCellElement*

The object used to represent the `TH` and `TD` elements. See the TD element definition in HTML 4.0.
IDL Definition

```
interface HTMLTableCellElement : HTMLElement {
  readonly attribute long             cellIndex;
           attribute DOMString        abbr;
           attribute DOMString        align;
           attribute DOMString        axis;
           attribute DOMString        bgColor;
           attribute DOMString        ch;
           attribute DOMString        chOff;
           attribute long             colSpan;
           attribute DOMString        headers;
           attribute DOMString        height;
           attribute boolean          noWrap;
           attribute long             rowSpan;
```

```
            attribute DOMString        scope;
            attribute DOMString        vAlign;
            attribute DOMString        width;
};
```

Attributes

`cellIndex` of type `long`, readonly
: The index of this cell in the row.

`abbr` of type `DOMString` [p.19]
: Abbreviation for header cells. See the abbr attribute definition in HTML 4.0.

`align` of type `DOMString` [p.19]
: Horizontal alignment of data in cell. See the align attribute definition in HTML 4.0.

`axis` of type `DOMString` [p.19]
: Names group of related headers. See the axis attribute definition in HTML 4.0.

`bgColor` of type `DOMString` [p.19]
: Cell background color. See the bgcolor attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`ch` of type `DOMString` [p.19]
: Alignment character for cells in a column. See the char attribute definition in HTML 4.0.

`chOff` of type `DOMString` [p.19]
: Offset of alignment character. See the charoff attribute definition in HTML 4.0.

`colSpan` of type `long`
: Number of columns spanned by cell. See the colspan attribute definition in HTML 4.0.

`headers` of type `DOMString` [p.19]
: List of `id` attribute values for header cells. See the headers attribute definition in HTML 4.0.

`height` of type `DOMString` [p.19]
: Cell height. See the height attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`noWrap` of type `boolean`
: Suppress word wrapping. See the nowrap attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`rowSpan` of type `long`
: Number of rows spanned by cell. See the rowspan attribute definition in HTML 4.0.

`scope` of type `DOMString` [p.19]
: Scope covered by header cells. See the scope attribute definition in HTML 4.0.

`vAlign` of type `DOMString` [p.19]
Vertical alignment of data in cell. See the valign attribute definition in HTML 4.0.

`width` of type `DOMString` [p.19]
Cell width. See the width attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

Interface *HTMLFrameSetElement*

Create a grid of frames. See the FRAMESET element definition in HTML 4.0.

IDL Definition

```
interface HTMLFrameSetElement : HTMLElement {
           attribute DOMString        cols;
           attribute DOMString        rows;
};
```

Attributes

`cols` of type `DOMString` [p.19]
The number of columns of frames in the frameset. See the cols attribute definition in HTML 4.0.

`rows` of type `DOMString` [p.19]
The number of rows of frames in the frameset. See the rows attribute definition in HTML 4.0.

Interface *HTMLFrameElement*

Create a frame. See the FRAME element definition in HTML 4.0.

IDL Definition

```
interface HTMLFrameElement : HTMLElement {
           attribute DOMString        frameBorder;
           attribute DOMString        longDesc;
           attribute DOMString        marginHeight;
           attribute DOMString        marginWidth;
           attribute DOMString        name;
           attribute boolean          noResize;
           attribute DOMString        scrolling;
           attribute DOMString        src;
};
```

Attributes

`frameBorder` of type `DOMString` [p.19]
Request frame borders. See the frameborder attribute definition in HTML 4.0.

`longDesc` of type `DOMString` [p.19]
URI designating a long description of this image or frame. See the longdesc attribute definition in HTML 4.0.

`marginHeight` of type `DOMString` [p.19]
: Frame margin height, in pixels. See the marginheight attribute definition in HTML 4.0.

`marginWidth` of type `DOMString` [p.19]
: Frame margin width, in pixels. See the marginwidth attribute definition in HTML 4.0.

`name` of type `DOMString` [p.19]
: The frame name (object of the `target` attribute). See the name attribute definition in HTML 4.0.

`noResize` of type `boolean`
: When true, forbid user from resizing frame. See the noresize attribute definition in HTML 4.0.

`scrolling` of type `DOMString` [p.19]
: Specify whether or not the frame should have scrollbars. See the scrolling attribute definition in HTML 4.0.

`src` of type `DOMString` [p.19]
: A URI designating the initial frame contents. See the src attribute definition in HTML 4.0.

Interface *HTMLIFrameElement*

Inline subwindows. See the IFRAME element definition in HTML 4.0.

IDL Definition

```
interface HTMLIFrameElement : HTMLElement {
           attribute DOMString        align;
           attribute DOMString        frameBorder;
           attribute DOMString        height;
           attribute DOMString        longDesc;
           attribute DOMString        marginHeight;
           attribute DOMString        marginWidth;
           attribute DOMString        name;
           attribute DOMString        scrolling;
           attribute DOMString        src;
           attribute DOMString        width;
};
```

Attributes

`align` of type `DOMString` [p.19]
: Aligns this object (vertically or horizontally) with respect to its surrounding text. See the align attribute definition in HTML 4.0. This attribute is deprecated in HTML 4.0.

`frameBorder` of type `DOMString` [p.19]
: Request frame borders. See the frameborder attribute definition in HTML 4.0.

`height` of type `DOMString` [p.19]
: Frame height. See the height attribute definition in HTML 4.0.

`longDesc` of type `DOMString` [p.19]
: URI designating a long description of this image or frame. See the longdesc attribute definition in HTML 4.0.

`marginHeight` of type `DOMString` [p.19]
: Frame margin height, in pixels. See the marginheight attribute definition in HTML 4.0.

`marginWidth` of type `DOMString` [p.19]
: Frame margin width, in pixels. See the marginwidth attribute definition in HTML 4.0.

`name` of type `DOMString` [p.19]
: The frame name (object of the `target` attribute). See the name attribute definition in HTML 4.0.

`scrolling` of type `DOMString` [p.19]
: Specify whether or not the frame should have scrollbars. See the scrolling attribute definition in HTML 4.0.

`src` of type `DOMString` [p.19]
: A URI designating the initial frame contents. See the src attribute definition in HTML 4.0.

`width` of type `DOMString` [p.19]
: Frame width. See the width attribute definition in HTML 4.0.

3. Document Object Model Views

Editors
Laurence Cable, Sun
Arnaud Le Hors, W3C

3.1. Introduction

A document may have one or more "views" associated with it, e.g: a computed view on a document after applying a CSS stylesheet, or multiple presentations (e.g HTML Frame) of the same document in a client.

This section defines an `AbstractView` [p.117] interface which provides a base interface that all such views shall derive from. It defines an attribute which references the target document.

In the DOM Level 2, there are no subinterfaces of `AbstractView` [p.117] defined, it is introduced for use in future revisions.

However, `AbstractView` [p.117] is defined in this version to provide a distinguishing attribute; of a `Document` [p.25] as a "default" (implementation dependent) view thereof, and of a `UIEvent` [p.218] to identify the (implementation dependent) origin of the `screenX` and `screenY` attributes therein.

The interfaces found within this section are not mandatory. A DOM application can use the `hasFeature` method of the `DOMImplementation` [p.22] interface to determine whether they are supported or not. The feature string for all the interfaces listed in this section is "Views".

3.2. Interfaces

Interface *AbstractView* (introduced in **DOM Level 2**)

A base interface that all views shall derive from.

IDL Definition

```
// Introduced in DOM Level 2:
interface AbstractView {
  readonly attribute DocumentView     document;
};
```

Attributes

`document` of type `DocumentView` [p.117] , readonly

The source `DocumentView` [p.117] for which, this is an `AbstractView` of.

Interface *DocumentView* (introduced in **DOM Level 2**)

The `DocumentView` interface is implemented by `Document` [p.25] objects in DOM implementations supporting DOM Views. It provides an attribute to retrieve the default view of a document.

IDL Definition

```
// Introduced in DOM Level 2:
interface DocumentView {
  readonly attribute AbstractView     defaultView;
};
```

Attributes

`defaultView` of type `AbstractView` [p.117] , readonly

The default `AbstractView` [p.117] for this `Document` [p.25] , or `null` if none available.

4. Document Object Model StyleSheets

Editors
Vidur Apparao, Netscape Communications Corp.
Philippe Le Hégaret, W3C
Chris Wilson, Microsoft

4.1. Introduction

The DOM Level 2 Style Sheet interfaces are base interfaces used to represent any type of style sheet. The expectation is that DOM modules that represent a specific style sheet language may contain interfaces that derive from these interfaces.

4.2. Style Sheet Interfaces

This set of interfaces represents the generic notion of style sheets.

Interface *StyleSheet* (introduced in **DOM Level 2**)

The `StyleSheet` interface is the abstract base interface for any type of style sheet. It represents a single style sheet associated with a structured document. In HTML, the StyleSheet interface represents either an external style sheet, included via the HTML *LINK* element, or an inline *STYLE* element. In XML, this interface represents an external style sheet, included via a *style sheet processing instruction*.

IDL Definition

```
// Introduced in DOM Level 2:
interface StyleSheet {
  readonly attribute DOMString        type;
           attribute boolean          disabled;
  readonly attribute Node             ownerNode;
  readonly attribute StyleSheet       parentStyleSheet;
  readonly attribute DOMString        href;
  readonly attribute DOMString        title;
  readonly attribute MediaList        media;
};
```

Attributes

`type` of type `DOMString` [p.19] , readonly

This specifies the style sheet language for this style sheet. The style sheet language is specified as a content type (e.g. "text/css"). The content type is often specified in the `ownerNode`. A list of registered content types can be found at *ftp://ftp.isi.edu/in-notes/iana/assignments/media-types/*. Also see the *type attribute definition* for the `LINK` element in HTML 4.0, and the type pseudo-attribute for the XML *style sheet processing instruction*.

`disabled` of type `boolean`
: `false` if the style sheet is applied to the document. `true` if it is not. Modifying this attribute may cause a new resolution of style for the document. For the Document Object Model CSS [p.125] , the medium has a higher priority than the `disabled` attribute. So, if the media doesn't apply to the current user agent, the `disabled` attribute is ignored.

`ownerNode` of type `Node` [p.34] , readonly
: The node that associates this style sheet with the document. For HTML, this may be the corresponding `LINK` or `STYLE` element. For XML, it may be the linking processing instruction. For style sheets that are included by other style sheets, the value of this attribute is `null`.

`parentStyleSheet` of type `StyleSheet` [p.119] , readonly
: For style sheet languages that support the concept of style sheet inclusion, this attribute represents the including style sheet, if one exists. If the style sheet is a top-level style sheet, or the style sheet language does not support inclusion, the value of this attribute is `null`.

`href` of type `DOMString` [p.19] , readonly
: If the style sheet is a linked style sheet, the value of its attribute is its location. For inline style sheets, the value of this attribute is `null`. See the *href attribute definition* for the `LINK` element in HTML 4.0, and the href pseudo-attribute for the XML *style sheet processing instruction*.

`title` of type `DOMString` [p.19] , readonly
: The advisory title. The title is often specified in the `ownerNode`. See the *title attribute definition* for the `LINK` element in HTML 4.0, and the title pseudo-attribute for the XML *style sheet processing instruction*.

`media` of type `MediaList` [p.121] , readonly
: The intended destination media for style information. The media is often specified in the `ownerNode`. If no media has been specified, the `MediaList` [p.121] will be empty. See the *media attribute definition* for the `LINK` element in HTML 4.0, and the media pseudo-attribute for the XML *style sheet processing instruction* .

Interface *StyleSheetList* (introduced in **DOM Level 2**)

The `StyleSheetList` interface provides the abstraction of an ordered collection of style sheets.

IDL Definition

```
// Introduced in DOM Level 2:
interface StyleSheetList {
  readonly attribute unsigned long    length;
  StyleSheet          item(in unsigned long index);
};
```

Attributes

`length` of type `unsigned long`, readonly
: The number of `StyleSheet` [p.119] in the list. The range of valid child stylesheet indices is `0` to `length-1` inclusive.

Methods

`item`

Used to retrieve a style sheet by ordinal index.

Parameters

`unsigned long`	`index`	Index into the collection

Return Value

`StyleSheet` [p.119]	The style sheet at the `index` position in the `StyleSheetList`, or `null` if that is not a valid index.

No Exceptions

Interface *MediaList* (introduced in **DOM Level 2**)

The `MediaList` interface provides the abstraction of an ordered collection of *media*, without defining or constraining how this collection is implemented. An empty list is the same as a list that contain the medium `"all"`.

IDL Definition

```
// Introduced in DOM Level 2:
interface MediaList {
           attribute DOMString        cssText;
                                        // raises(DOMException) on setting

  readonly attribute unsigned long    length;
  DOMString          item(in unsigned long index);
  void               delete(in DOMString oldMedium)
                                        raises(DOMException);
  void               append(in DOMString newMedium)
                                        raises(DOMException);
};
```

Attributes

`cssText` of type `DOMString` [p.19]

The parsable textual representation of the media list. This is a comma-separated list of media.

Exceptions on setting

`DOMException` [p.21]	SYNTAX_ERR: Raised if the specified CSS string value has a syntax error and is unparsable.
	NO_MODIFICATION_ALLOWED_ERR: Raised if this media list is readonly.

`length` of type `unsigned long`, readonly
The number of media in the list. The range of valid media is `0` to `length-1` inclusive.

Methods

`item`
Returns the `index`th in the list. If `index` is greater than or equal to the number of media in the list, this returns `null`.

Parameters

`unsigned long`	`index`	Index into the collection.

Return Value

`DOMString` [p.19]	The medium at the `index`th position in the `MediaList`, or `null` if that is not a valid index.

No Exceptions

`delete`
Deletes the medium indicated by `oldMedium` from the list.

Parameters

`DOMString` [p.19]	`oldMedium`	The medium to delete in the media list.

Exceptions

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this list is readonly. NOT_FOUND_ERR: Raised if `oldMedium` is not in the list.

No Return Value

`append`
Adds the medium `newMedium` to the end of the list. It the `newMedium` is already used, it is first removed.

Parameters

`DOMString` [p.19]	`newMedium`	The new medium to add.

Exceptions

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this list is readonly.

No Return Value

4.3. Document Extensions

Interface *LinkStyle*

The `LinkStyle` interface provides a mechanism by which a style sheet can be retrieved from the node responsible for linking it into a document. An instance of the `LinkStyle` interface can be obtained using binding-specific casting methods on an instance of a linking node (`HTMLLinkElement` [p.76] , `HTMLStyleElement` [p.78] or `ProcessingInstruction` [p.64] in DOM Level 2).

IDL Definition

```
interface LinkStyle {
  readonly attribute StyleSheet       sheet;
};
```

Attributes

`sheet` of type `StyleSheet` [p.119] , readonly

The style sheet.

Interface *DocumentStyle* (introduced in **DOM Level 2**)

The `DocumentStyle` interface provides a mechanism by which the style sheets embedded a document can be retrieved. The expectation is that an instance of the `DocumentStyle` interface can be obtained by using binding-specific casting methods on an instance of the `Document` [p.25] interface.

IDL Definition

```
// Introduced in DOM Level 2:
interface DocumentStyle {
  readonly attribute StyleSheetList   styleSheets;
};
```

Attributes

`styleSheets` of type `StyleSheetList` [p.120] , readonly

A list containing all the style sheets explicitly linked into or embedded in a document. For HTML documents, this includes external style sheets, included via the HTML *LINK* element, and inline *STYLE* elements. In XML, this includes external style sheets, included via *style sheet processing instructions*.

4.4. Association between a style sheet and a document.

HTML and Style Sheet Creation

A style sheet can be associated with an HTMLDocument in one of two ways:

- By creating a new LINK HTML element (see the `HTMLLinkElement` [p.76] interface). The underlying style sheet will be created after the element is inserted into the document and both the href and the type attribute have been set in a way indicating that the linked object is a style sheet.
- By creating a new STYLE HTML element (see the `HTMLStyLeElement` interface). The underlying style sheet will be created after the element is inserted into the document and the type attribute is set in a way indicating that the element corresponds to a style sheet language interpreted by the user agent.

HTML and Style Sheet Removal

Removing a LINK HTML element or a STYLE HTML element removes the underlying style sheet from the style sheet collection associated with a document. Specifically, the removed style sheet is no longer applied to the presentation of the document.

XML and Style Sheet Creation

A new style sheet can be created and associated an XML document by creating a processing instruction with the target 'xml-stylesheet' and inserting it into the document.

XML and Style Sheet Removal

Removing a processing instruction with a target of 'xml-stylesheet' removes the underlying style sheet from the style sheet collection associated with a document. Specifically, the removed style sheet is no longer applied to the presentation of the document.

5. Document Object Model CSS

Editors
Vidur Apparao, Netscape Communications Corp.
Philippe Le Hégaret, W3C
Chris Wilson, Microsoft

5.1. Overview of the DOM Level 2 CSS Interfaces

The DOM Level 2 Cascading Style Sheets (CSS) interfaces are designed with the goal of exposing CSS constructs to object model consumers. Cascading Style Sheets is a declarative syntax for defining presentation rules, properties and ancillary constructs used to format and render Web documents. This document specifies a mechanism to programmatically access and modify the rich style and presentation control provided by CSS (specifically CSS level two [CSS2]). This augments CSS by providing a mechanism to dynamically control the inclusion and exclusion of individual style sheets, as well as manipulate CSS rules and properties.

The CSS interfaces are organized in a logical, rather than physical structure. A collection of all style sheets referenced by or embedded in the document is accessible on the document interface. Each item in this collection exposes the properties common to all style sheets referenced or embedded in HTML and XML documents; this interface is described in the Style Sheets chapter of the DOM Level 2. User style sheets are not accessible through this collection, in part due to potential privacy concerns (and certainly read-write issues).

For each CSS style sheet, an additional interface is exposed - the `CSSStyleSheet` [p.126] interface. This interface allows access to the collection of rules within a CSS style sheet and methods to modify that collection. Interfaces are provided for each specific type of rule in CSS2 (e.g. style declarations, `@import` rules, or `@font-face` rules), as well as a shared generic `CSSRule` [p.129] interface.

The most common type of rule is a style declaration. The `CSSStyleRule` [p.130] interface that represents this type of rule provides string access to the CSS selector of the rule, and access to the property declarations through the `CSSStyleDeclaration` [p.134] interface.

Finally, an optional `CSS2Properties` [p.171] interface is described; this interface (if implemented) provides shortcuts to the string values of all the properties in CSS level 2.

5.2. CSS Fundamental Interfaces

The interfaces within this section are considered fundamental, and must be supported by all conforming DOM implementations. These interfaces represent CSS style sheets specifically.

A DOM application can use the `hasFeature` method of the `DOMImplementation` [p.22] interface to determine whether the CSS interfaces are supported or not. The feature string for the fundamental interfaces listed in this section is "CSS".

Exception *CSSException*

This exception is raised when a specific CSS operation is impossible to perform.

IDL Definition

```
exception CSSException {
  unsigned short   code;
};

// CSSExceptionCode
const unsigned short      SYNTAX_ERR                    = 0;
const unsigned short      INVALID_MODIFICATION_ERR      = 1;
```

Definition group *CSSExceptionCode*

An integer indicating the type of error generated.

Defined Constants

SYNTAX_ERR	Raised when a string can't be parsed.
INVALID_MODIFICATION_ERR	Raised when an invalid modification is performed (see `CSSRule` [p.129]).

Interface *CSSStyleSheet* (introduced in **DOM Level 2**)

The `CSSStyleSheet` interface is a concrete interface used to represent a CSS style sheet i.e. a style sheet whose content type is "text/css".

IDL Definition

```
// Introduced in DOM Level 2:
interface CSSStyleSheet : stylesheets::StyleSheet {
  readonly attribute CSSRule          ownerRule;
  readonly attribute CSSRuleList      cssRules;
  unsigned long      insertRule(in DOMString rule,
                                in unsigned long index)
                                        raises(DOMException,
                                               CSSException);
  void               deleteRule(in unsigned long index)
                                        raises(DOMException);
};
```

Attributes

`ownerRule` of type `CSSRule` [p.129] , readonly

If this style sheet comes from an `@import` rule, the `ownerRule` attribute will contain the `CSSImportRule` [p.133] . In that case, the `ownerNode` attribute in the `StyleSheet` [p.119] interface will be `null`. If the style sheet comes from an element or a processing instruction, the `ownerRule` attribute will be `null` and the `ownerNode` attribute will contain the `Node` [p.34] .

`cssRules` of type `CSSRuleList` [p.128] , readonly
: The list of all CSS rules contained within the style sheet. This includes both *rule sets* and *at-rules*.

Methods

`insertRule`
: Used to insert a new rule into the style sheet. The new rule now becomes part of the cascade.

Parameters

`DOMString` [p.19]	`rule`	The parsable text representing the rule. For rule sets this contains both the selector and the style declaration. For at-rules, this specifies both the at-identifier and the rule content.
`unsigned long`	`index`	The index within the style sheet's rule list of the rule before which to insert the specified rule. If the specified index is equal to the length of the style sheet's rule collection, the rule will be added to the end of the style sheet.

Return Value

`unsigned long`	The index within the style sheet's rule collection of the newly inserted rule.

Exceptions

`DOMException` [p.21]	HIERARCHY_REQUEST_ERR: Raised if the rule cannot be inserted at the specified index e.g. if an `@import` rule is inserted after a standard rule set or other at-rule. INDEX_SIZE_ERR: Raised if the specified index is not a valid insertion point. NO_MODIFICATION_ALLOWED_ERR: Raised if this style sheet is readonly.
`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified rule has a syntax error and is unparsable.

`deleteRule`
: Used to delete a rule from the style sheet.

Parameters

`unsigned long`	`index`	The index within the style sheet's rule list of the rule to remove.

Exceptions

`DOMException` [p.21]	INDEX_SIZE_ERR: Raised if the specified index does not correspond to a rule in the style sheet's rule list. NO_MODIFICATION_ALLOWED_ERR: Raised if this style sheet is readonly.

No Return Value

Interface *CSSRuleList* (introduced in **DOM Level 2**)

The `CSSRuleList` interface provides the abstraction of an ordered collection of CSS rules.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSSRuleList {
  readonly attribute unsigned long    length;
  CSSRule             item(in unsigned long index);
};
```

Attributes

`length` of type `unsigned long`, readonly

The number of `CSSRule` [p.129] s in the list. The range of valid child rule indices is `0` to `length-1` inclusive.

Methods

`item`

Used to retrieve a CSS rule by ordinal index. The order in this collection represents the order of the rules in the CSS style sheet.

Parameters

`unsigned long`	`index`	Index into the collection

Return Value

`CSSRule` [p.129]	The style rule at the `index` position in the `CSSRuleList`, or `null` if that is not a valid index.

No Exceptions

Interface *CSSRule* (introduced in **DOM Level 2**)

The `CSSRule` interface is the abstract base interface for any type of CSS *statement*. This includes both *rule sets* and *at-rules*. An implementation is expected to preserve all rules specified in a CSS style sheet, even if it is not recognized. Unrecognized rules are represented using the `CSSUnknownRule` [p.134] interface.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSSRule {
  // RuleType
  const unsigned short      UNKNOWN_RULE                  = 0;
  const unsigned short      STYLE_RULE                    = 1;
  const unsigned short      CHARSET_RULE                  = 2;
  const unsigned short      IMPORT_RULE                   = 3;
  const unsigned short      MEDIA_RULE                    = 4;
  const unsigned short      FONT_FACE_RULE                = 5;
  const unsigned short      PAGE_RULE                     = 6;

  readonly attribute unsigned short   type;
           attribute DOMString        cssText;
                                        // raises(CSSException,
                                        //        DOMException) on setting

  readonly attribute CSSStyleSheet    parentStyleSheet;
  readonly attribute CSSRule          parentRule;
};
```

Definition group *RuleType*

An integer indicating which type of rule this is.

Defined Constants

UNKNOWN_RULE	The rule is a `CSSUnknownRule` [p.134] .
STYLE_RULE	The rule is a `CSSStyleRule` [p.130] .
CHARSET_RULE	The rule is a `CSSCharsetRule` [p.134] .
IMPORT_RULE	The rule is a `CSSImportRule` [p.133] .
MEDIA_RULE	The rule is a `CSSMediaRule` [p.131] .
FONT_FACE_RULE	The rule is a `CSSFontFaceRule` [p.132] .
PAGE_RULE	The rule is a `CSSPageRule` [p.133] .

Attributes

`type` of type `unsigned short`, readonly

The type of the rule, as defined above. The expectation is that binding-specific casting methods can be used to cast down from an instance of the `CSSRule` interface to the specific derived interface implied by the `type`.

`cssText` of type `DOMString` [p.19]
The parsable textual representation of the rule. This reflects the current state of the rule and not its initial value.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified CSS string value has a syntax error and is unparsable.
	INVALID_MODIFICATION_ERR: Raised if the specified CSS string value represents a different type of rule than the current one.
`DOMException` [p.21]	HIERARCHY_REQUEST_ERR: Raised if the rule cannot be inserted at this point in the style sheet.
	NO_MODIFICATION_ALLOWED_ERR: Raised if the rule is readonly.

`parentStyleSheet` of type `CSSStyleSheet` [p.126] , readonly
The style sheet that contains this rule.

`parentRule` of type `CSSRule` [p.129] , readonly
If this rule is contained inside another rule (e.g. a style rule inside an @media block), this is the containing rule. If this rule is not nested inside any other rules, this returns `null`.

Interface *CSSStyleRule* (introduced in **DOM Level 2**)

The `CSSStyleRule` interface represents a single *rule set* in a CSS style sheet.
IDL Definition

```
// Introduced in DOM Level 2:
interface CSSStyleRule : CSSRule {
           attribute DOMString        selectorText;
                                        // raises(CSSException,
                                        //        DOMException) on setting

  readonly attribute CSSStyleDeclaration  style;
};
```

Attributes
`selectorText` of type `DOMString` [p.19]
The textual representation of the *selector* for the rule set. The implementation may have stripped out insignificant whitespace while parsing the selector.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified CSS string value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this rule is readonly.

`style` of type `CSSStyleDeclaration` [p.134] , readonly
The *declaration-block* of this rule set.

Interface *CSSMediaRule* (introduced in **DOM Level 2**)

The `CSSMediaRule` interface represents a *@media rule* in a CSS style sheet. A `@media` rule can be used to delimit style rules for specific media types.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSSMediaRule : CSSRule {
  readonly attribute stylesheets::MediaList  media;
  readonly attribute CSSRuleList      cssRules;
  unsigned long      insertRule(in DOMString rule,
                                in unsigned long index)
                                        raises(DOMException,
                                               CSSException);
  void               deleteRule(in unsigned long index)
                                        raises(DOMException);
};
```

Attributes

`media` of type `stylesheets::MediaList`, readonly
A list of *media types* for this rule.

`cssRules` of type `CSSRuleList` [p.128] , readonly
A list of all CSS rules contained within the media block.

Methods

`insertRule`
Used to insert a new rule into the media block.

Parameters

`DOMString` [p.19]	`rule`	The parsable text representing the rule. For rule sets this contains both the selector and the style declaration. For at-rules, this specifies both the at-identifier and the rule content.
`unsigned long`	`index`	The index within the media block's rule collection of the rule before which to insert the specified rule. If the specified index is equal to the length of the media blocks's rule collection, the rule will be added to the end of the media block.

Return Value

`unsigned long`	The index within the media block's rule collection of the newly inserted rule.

Exceptions

`DOMException` [p.21]	HIERARCHY_REQUEST_ERR: Raised if the rule cannot be inserted at the specified index. e.g. if an `@import` rule is inserted after a standard rule set or other at-rule. INDEX_SIZE_ERR: Raised if the specified index is not a valid insertion point. NO_MODIFICATION_ALLOWED_ERR: Raised if this media rule is readonly.
`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified rule has a syntax error and is unparsable.

`deleteRule`

Used to delete a rule from the media block.

Parameters

`unsigned long`	`index`	The index within the media block's rule collection of the rule to remove.

Exceptions

`DOMException` [p.21]	INDEX_SIZE_ERR: Raised if the specified index does not correspond to a rule in the media rule list. NO_MODIFICATION_ALLOWED_ERR: Raised if this media rule is readonly.

No Return Value

Interface *CSSFontFaceRule* (introduced in **DOM Level 2**)

The `CSSFontFaceRule` interface represents a *@font-face rule* in a CSS style sheet. The `@font-face` rule is used to hold a set of font descriptions.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSSFontFaceRule : CSSRule {
  readonly attribute CSSStyleDeclaration  style;
};
```

Attributes

`style` of type `CSSStyleDeclaration` [p.134] , readonly
The *declaration-block* of this rule.

Interface *CSSPageRule* (introduced in **DOM Level 2**)

The `CSSPageRule` interface represents a *@page rule* within a CSS style sheet. The `@page` rule is used to specify the dimensions, orientation, margins, etc. of a page box for paged media.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSSPageRule : CSSRule {
           attribute DOMString        selectorText;
                                        // raises(CSSException,
                                        //        DOMException) on setting

  readonly attribute CSSStyleDeclaration  style;
};
```

Attributes

`selectorText` of type `DOMString` [p.19]
The parsable textual representation of the page selector for the rule.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified CSS string value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this rule is readonly.

`style` of type `CSSStyleDeclaration` [p.134] , readonly
The *declaration-block* of this rule.

Interface *CSSImportRule* (introduced in **DOM Level 2**)

The `CSSImportRule` interface represents a *@import rule* within a CSS style sheet. The `@import` rule is used to import style rules from other style sheets.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSSImportRule : CSSRule {
  readonly attribute DOMString        href;
  readonly attribute stylesheets::MediaList  media;
  readonly attribute CSSStyleSheet    styleSheet;
};
```

Attributes

`href` of type `DOMString` [p.19] , readonly
: The location of the style sheet to be imported. The attribute will not contain the `"url(...)"` specifier around the URI.

`media` of type `stylesheets::MediaList`, readonly
: A list of media types for which this style sheet may be used.

`styleSheet` of type `CSSStyleSheet` [p.126] , readonly
: The style sheet referred to by this rule, if it has been loaded. The value of this attribute is `null` if the style sheet has not yet been loaded or if it will not be loaded (e.g. if the style sheet is for a media type not supported by the user agent).

Interface *CSSCharsetRule* (introduced in **DOM Level 2**)

The `CSSCharsetRule` interface a *@charset rule* in a CSS style sheet. A `@charset` rule can be used to define the encoding of the style sheet.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSSCharsetRule : CSSRule {
           attribute DOMString        encoding;
                                        // raises(CSSException,
                                        //        DOMException) on setting

};
```

Attributes

`encoding` of type `DOMString` [p.19]
: The encoding information used in this `@charset` rule.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified encoding value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this encoding rule is readonly.

Interface *CSSUnknownRule* (introduced in **DOM Level 2**)

The `CSSUnkownRule` interface represents an at-rule not supported by this user agent.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSSUnknownRule : CSSRule {
};
```

Interface *CSSStyleDeclaration* (introduced in **DOM Level 2**)

The `CSSStyleDeclaration` interface represents a single *CSS declaration block*. This interface may be used to determine the style properties currently set in a block or to set style properties explicitly within the block.

While an implementation may not recognize all CSS properties within a CSS declaration block, it is expected to provide access to all specified properties through the `CSSStyleDeclaration` interface. Furthermore, implementations that support a specific level of CSS should correctly handle *CSS shorthand* properties for that level. For a further discussion of shorthand properties, see the `CSS2Properties` [p.171] interface.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSSStyleDeclaration {
           attribute DOMString        cssText;
                                        // raises(CSSException,
                                        //        DOMException) on setting

  DOMString          getPropertyValue(in DOMString propertyName);
  CSSValue           getPropertyCSSValue(in DOMString propertyName);
  DOMString          removeProperty(in DOMString propertyName)
                                      raises(DOMException);
  DOMString          getPropertyPriority(in DOMString propertyName);
  void               setProperty(in DOMString propertyName,
                                 in DOMString value,
                                 in DOMString priority)
                                        raises(CSSException,
                                               DOMException);
  readonly attribute unsigned long    length;
  DOMString          item(in unsigned long index);
  readonly attribute CSSRule          parentRule;
};
```

Attributes

`cssText` of type `DOMString` [p.19]

The parsable textual representation of the declaration block (including the surrounding curly braces). Setting this attribute will result in the parsing of the new value and resetting of the properties in the declaration block.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified CSS string value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this declaration is readonly.

`length` of type `unsigned long`, readonly

The number of properties that have been explicitly set in this declaration block.

`parentRule` of type `CSSRule` [p.129] , readonly
The CSS rule that contains this declaration block or `null` if this `CSSStyleDeclaration` is not attached to a `CSSRule` [p.129] .

Methods

`getPropertyValue`
Used to retrieve the value of a CSS property if it has been explicitly set within this declaration block.
Parameters

`DOMString` [p.19]	`propertyName`	The name of the CSS property. See the *CSS property index*.

Return Value

`DOMString` [p.19]	Returns the value of the property if it has been explicitly set for this declaration block. Returns the empty string if the property has not been set.

No Exceptions

`getPropertyCSSValue`
Used to retrieve the object representation of the value of a CSS property if it has been explicitly set within this declaration block. This method returns `null` if the property is a *shorthand* property. Shorthand property values can only be accessed and modified as strings, using the `getPropertyValue` and `setProperty` methods.
Parameters

`DOMString` [p.19]	`propertyName`	The name of the CSS property. See the *CSS property index*.

Return Value

`CSSValue` [p.138]	Returns the value of the property if it has been explicitly set for this declaration block. Returns the `null` if the property has not been set.

No Exceptions

`removeProperty`
Used to remove a CSS property if it has been explicitly set within this declaration block.
Parameters

DOMString [p.19]	propertyName	The name of the CSS property. See the *CSS property index*.

Return Value

DOMString [p.19]	Returns the value of the property if it has been explicitly set for this declaration block. Returns the empty string if the property has not been set or the property name does not correspond to a valid CSS2 property.

Exceptions

DOMException [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this declaration is readonly.

`getPropertyPriority`

Used to retrieve the priority of a CSS property (e.g. the `"important"` qualifier) if the property has been explicitly set in this declaration block.

Parameters

DOMString [p.19]	propertyName	The name of the CSS property. See the *CSS property index*.

Return Value

DOMString [p.19]	A string representing the priority (e.g. `"important"`) if one exists. The empty string if none exists.

No Exceptions

`setProperty`

Used to set a property value and priority within this declaration block.

Parameters

DOMString [p.19]	propertyName	The name of the CSS property. See the *CSS property index*.
DOMString	value	The new value of the property.
DOMString	priority	The new priority of the property (e.g. `"important"`).

Exceptions

`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this declaration is readonly.

No Return Value

`item`

Used to retrieve the properties that have been explicitly set in this declaration block. The order of the properties retrieved using this method does not have to be the order in which they were set. This method can be used to iterate over all properties in this declaration block.

Parameters

`unsigned long`	`index`	Index of the property name to retrieve.

Return Value

`DOMString` [p.19]	The name of the property at this ordinal position. The empty string if no property exists at this position.

No Exceptions

Interface *CSSValue* (introduced in **DOM Level 2**)

The `CSSValue` interface represents a simple or a complex value.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSSValue {
  // UnitTypes
  const unsigned short      CSS_INHERIT                    = 0;
  const unsigned short      CSS_PRIMITIVE_VALUE            = 1;
  const unsigned short      CSS_VALUE_LIST                 = 2;
  const unsigned short      CSS_CUSTOM                     = 3;

           attribute DOMString        cssText;
                                        // raises(CSSException,
                                        //        DOMException) on setting

  readonly attribute unsigned short   valueType;
};
```

Definition group *UnitTypes*

An integer indicating which type of unit applies to the value. ***Note:*** *All CSS2 constants are not supposed to be required by the implementation since all CSS2 interfaces are optionals.*

Defined Constants

CSS_INHERIT	The value is inherited.
CSS_PRIMITIVE_VALUE	The value is a `CSSPrimitiveValue` [p.139] .
CSS_VALUE_LIST	The value is a list `CSSValue`.
CSS_CUSTOM	The value is a custom value.

Attributes

`cssText` of type `DOMString` [p.19]
A string representation of the current value.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified CSS string value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this value is readonly.

`valueType` of type `unsigned short`, readonly
A code defining the type of the value as defined above.

Interface *CSSPrimitiveValue* (introduced in **DOM Level 2**)

The `CSSPrimitiveValue` interface represents a single *CSS value*. This interface may be used to determine the value of a specific style property currently set in a block or to set a specific style properties explicitly within the block. An instance of this interface can be obtained from the `getPropertyCSSValue` method of the `CSSStyleDeclaration` [p.134] interface.
IDL Definition

```
// Introduced in DOM Level 2:
interface CSSPrimitiveValue : CSSValue {
  // UnitTypes
  const unsigned short      CSS_UNKNOWN                    = 0;
  const unsigned short      CSS_NUMBER                     = 1;
  const unsigned short      CSS_PERCENTAGE                 = 2;
  const unsigned short      CSS_EMS                        = 3;
  const unsigned short      CSS_EXS                        = 4;
  const unsigned short      CSS_PX                         = 5;
  const unsigned short      CSS_CM                         = 6;
  const unsigned short      CSS_MM                         = 9;
  const unsigned short      CSS_IN                         = 10;
  const unsigned short      CSS_PT                         = 11;
  const unsigned short      CSS_PC                         = 12;
  const unsigned short      CSS_DEG                        = 13;
  const unsigned short      CSS_RAD                        = 14;
  const unsigned short      CSS_GRAD                       = 15;
  const unsigned short      CSS_MS                         = 16;
  const unsigned short      CSS_S                          = 17;
```

```
  const unsigned short      CSS_HZ                         = 18;
  const unsigned short      CSS_KHZ                        = 19;
  const unsigned short      CSS_DIMENSION                  = 20;
  const unsigned short      CSS_STRING                     = 21;
  const unsigned short      CSS_URI                        = 22;
  const unsigned short      CSS_IDENT                      = 23;
  const unsigned short      CSS_ATTR                       = 24;
  const unsigned short      CSS_COUNTER                    = 25;
  const unsigned short      CSS_RECT                       = 26;
  const unsigned short      CSS_RGBCOLOR                   = 27;

  readonly attribute unsigned short   primitiveType;
  void               setFloatValue(in unsigned short unitType,
                                   in float floatValue)
                                       raises(DOMException);
  float              getFloatValue(in unsigned short unitType)
                                       raises(DOMException);
  void               setStringValue(in unsigned short stringType,
                                    in DOMString stringValue)
                                       raises(DOMException);
  DOMString          getStringValue()
                                       raises(DOMException);
  Counter            getCounterValue()
                                       raises(DOMException);
  Rect               getRectValue()
                                       raises(DOMException);
  RGBColor           getRGBColorValue()
                                       raises(DOMException);
};
```

Definition group *UnitTypes*

An integer indicating which type of unit applies to the value.
Defined Constants

CSS_UNKNOWN	The value is not a recognized CSS2 value. The value can only be obtained by using the `cssText` attribute.
CSS_NUMBER	The value is a simple *number*. The value can be obtained by using the `getFloatValue` method.
CSS_PERCENTAGE	The value is a *percentage*. The value can be obtained by using the `getFloatValue` method.
CSS_EMS	The value is *length (ems)*. The value can be obtained by using the `getFloatValue` method.
CSS_EXS	The value is *length (exs)*. The value can be obtained by using the `getFloatValue` method.
CSS_PX	The value is *length (px)*. The value can be obtained by using the `getFloatValue` method.

CSS_CM	The value is *length (cm)*. The value can be obtained by using the `getFloatValue` method.
CSS_MM	The value is *length (mm)*. The value can be obtained by using the `getFloatValue` method.
CSS_IN	The value is *length (in)*. The value can be obtained by using the `getFloatValue` method.
CSS_PT	The value is *length (pt)*. The value can be obtained by using the `getFloatValue` method.
CSS_PC	The value is a *length (pc)*. The value can be obtained by using the `getFloatValue` method.
CSS_DEG	The value is an *angle (deg)*. The value can be obtained by using the `getFloatValue` method.
CSS_RAD	The value is an *angle (rad)*. The value can be obtained by using the `getFloatValue` method.
CSS_GRAD	The value is an *angle (grad)*. The value can be obtained by using the `getFloatValue` method.
CSS_MS	The value is a *time (ms)*. The value can be obtained by using the `getFloatValue` method.
CSS_S	The value is a *time (s)*. The value can be obtained by using the `getFloatValue` method.
CSS_HZ	The value is a *frequency (Hz)*. The value can be obtained by using the `getFloatValue` method.
CSS_KHZ	The value is a *frequency (kHz)*. The value can be obtained by using the `getFloatValue` method.
CSS_DIMENSION	The value is a number with an unknown dimension. The value can be obtained by using the `getFloatValue` method.
CSS_STRING	The value is a *STRING*. The value can be obtained by using the `getStringValue` method.
CSS_URI	The value is a *URI*. The value can be obtained by using the `getStringValue` method.
CSS_IDENT	The value is an *identifier*. The value can be obtained by using the `getStringValue` method.
CSS_ATTR	The value is a *attribute function*. The value can be obtained by using the `getStringValue` method.

CSS_COUNTER	The value is a *counter or counters function*. The value can be obtained by using the `getCounterValue` method.
CSS_RECT	The value is a *rect function*. The value can be obtained by using the `getRectValue` method.
CSS_RGBCOLOR	The value is a *RGB color*. The value can be obtained by using the `getRGBColorValue` method.

Attributes

`primitiveType` of type `unsigned short`, readonly

The type of the value as defined by the constants specified above.

Methods

`setFloatValue`

A method to set the float value with a specified unit. If the property attached with this value can not accept the specified unit or the float value, the value will be unchanged and a `DOMException` [p.21] will be raised.

Parameters

`unsigned short`	`unitType`	A unit code as defined above. The unit code can only be a float unit type (e.g. `NUMBER`, `PERCENTAGE`, `CSS_EMS`, `CSS_EXS`, `CSS_PX`, `CSS_PX`, `CSS_CM`, `CSS_MM`, `CSS_IN`, `CSS_PT`, `CSS_PC`, `CSS_DEG`, `CSS_RAD`, `CSS_GRAD`, `CSS_MS`, `CSS_S`, `CSS_HZ`, `CSS_KHZ`, `CSS_DIMENSION`).
`float`	`floatValue`	The new float value.

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the attached property doesn't support the float value or the unit type. NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

No Return Value

`getFloatValue`

This method is used to get a float value in a specified unit. If this CSS value doesn't contain a float value or can't be converted into the specified unit, a `DOMException` [p.21] is raised.

Parameters

unsigned short	unitType	A unit code to get the float value. The unit code can only be a float unit type (e.g. CSS_NUMBER, CSS_PERCENTAGE, CSS_EMS, CSS_EXS, CSS_PX, CSS_PX, CSS_CM, CSS_MM, CSS_IN, CSS_PT, CSS_PC, CSS_DEG, CSS_RAD, CSS_GRAD, CSS_MS, CSS_S, CSS_HZ, CSS_KHZ, CSS_DIMENSION).

Return Value

float	The float value in the specified unit.

Exceptions

DOMException [p.21]	INVALID_ACCESS_ERR: Raises if the CSS value doesn't contain a float value or if the float value can't be converted into the specified unit.

setStringValue

A method to set the string value with a specified unit. If the property attached to this value can't accept the specified unit or the string value, the value will be unchanged and a DOMException [p.21] will be raised.

Parameters

unsigned short	stringType	A string code as defined above. The string code can only be a string unit type (e.g. CSS_URI, CSS_IDENT, CSS_INHERIT and CSS_ATTR).
DOMString [p.19]	stringValue	The new string value. If the stringType is equal to CSS_INHERIT, the stringValue should be inherit.

Exceptions

DOMException [p.21]	INVALID_ACCESS_ERR: Raises if the CSS value doesn't contain a string value or if the string value can't be converted into the specified unit. NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

No Return Value

`getStringValue`

This method is used to get the string value in a specified unit. If the CSS value doesn't contain a string value, a `DOMException` [p.21] is raised.

Return Value

`DOMString` [p.19]	The string value in the current unit. The current `valueType` can only be a string unit type (e.g. `CSS_URI`, `CSS_IDENT` and `CSS_ATTR`).

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the CSS value doesn't contain a string value.

No Parameters

`getCounterValue`

This method is used to get the Counter value. If this CSS value doesn't contain a counter value, a `DOMException` [p.21] is raised. Modification to the corresponding style property can be achieved using the `Counter` [p.147] interface.

Return Value

`Counter` [p.147]	The Counter value.

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the CSS value doesn't contain a Counter value.

No Parameters

`getRectValue`

This method is used to get the Rect value. If this CSS value doesn't contain a rect value, a `DOMException` [p.21] is raised. Modification to the corresponding style property can be achieved using the `Rect` [p.146] interface.

Return Value

`Rect` [p.146]	The Rect value.

Exceptions

DOMException [p.21]	INVALID_ACCESS_ERR: Raises if the CSS value doesn't contain a Rect value.

No Parameters

getRGBColorValue

This method is used to get the RGB color. If this CSS value doesn't contain a RGB color value, a DOMException [p.21] is raised. Modification to the corresponding style property can be achieved using the RGBColor [p.146] interface.

Return Value

RGBColor [p.146]	the RGB color value.

Exceptions

DOMException [p.21]	INVALID_ACCESS_ERR: Raises if the attached property can't return a RGB color value.

No Parameters

Interface *CSSValueList* (introduced in **DOM Level 2**)

The CSSValueList interface provides the abstraction of an ordered collection of CSS values.

Some properties allow an empty list into their syntax. In that case, these properties take the none identifier. So, an empty list means that the propertie has the value none.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSSValueList : CSSValue {
  readonly attribute unsigned long    length;
  CSSValue           item(in unsigned long index);
};
```

Attributes

length of type unsigned long, readonly

The number of CSSValue [p.138] s in the list. The range of valid values indices is 0 to length-1 inclusive.

For

Methods

item

Used to retrieve a CSS rule by ordinal index. The order in this collection represents the order of the values in the CSS style property.

Parameters

`unsigned long`	`index`	Index into the collection.

Return Value

`CSSValue` [p.138]	The style rule at the `index` position in the `CSSValueList`, or `null` if that is not valid index.

No Exceptions

Interface *RGBColor* (introduced in **DOM Level 2**)

The `RGBColor` interface is used to represent any *RGB color* value. This interface reflects the values in the underlying style property. Hence, modifications made through this interface modify the style property.

IDL Definition

```
// Introduced in DOM Level 2:
interface RGBColor {
  readonly attribute CSSPrimitiveValue  red;
  readonly attribute CSSPrimitiveValue  green;
  readonly attribute CSSPrimitiveValue  blue;
};
```

Attributes

`red` of type `CSSPrimitiveValue` [p.139] , readonly
: This attribute is used for the red value of the RGB color.

`green` of type `CSSPrimitiveValue` [p.139] , readonly
: This attribute is used for the green value of the RGB color.

`blue` of type `CSSPrimitiveValue` [p.139] , readonly
: This attribute is used for the blue value of the RGB color.

Interface *Rect* (introduced in **DOM Level 2**)

The `Rect` interface is used to represent any *rect* value. This interface reflects the values in the underlying style property. Hence, modifications made through this interface modify the style property.

IDL Definition

```
// Introduced in DOM Level 2:
interface Rect {
  readonly attribute CSSPrimitiveValue  top;
  readonly attribute CSSPrimitiveValue  right;
  readonly attribute CSSPrimitiveValue  bottom;
  readonly attribute CSSPrimitiveValue  left;
};
```

Attributes

`top` of type `CSSPrimitiveValue` [p.139] , readonly
This attribute is used for the top of the rect.

`right` of type `CSSPrimitiveValue` [p.139] , readonly
This attribute is used for the right of the rect.

`bottom` of type `CSSPrimitiveValue` [p.139] , readonly
This attribute is used for the bottom of the rect.

`left` of type `CSSPrimitiveValue` [p.139] , readonly
This attribute is used for the left of the rect.

Interface *Counter* (introduced in **DOM Level 2**)

The `Counter` interface is used to represent any *counter or counters function* value. This interface reflects the values in the underlying style property. Hence, modifications made through this interface modify the style property.

IDL Definition

```
// Introduced in DOM Level 2:
interface Counter {
  readonly attribute DOMString        identifier;
  readonly attribute DOMString        listStyle;
  readonly attribute DOMString        separator;
};
```

Attributes

`identifier` of type `DOMString` [p.19] , readonly
This attribute is used for the identifier of the counter.

`listStyle` of type `DOMString` [p.19] , readonly
This attribute is used for the style of the list.

`separator` of type `DOMString` [p.19] , readonly
This attribute is used for the separator of nested counters.

5.2.1. Override and computed style sheet

Interface *ViewCSS*

This interface represents a CSS view. The `getComputedStyle` method provides a **read only access** to the *computed values* of an element.

IDL Definition

```
interface ViewCSS : views::AbstractView {
  CSSStyleDeclaration getComputedStyle(in Element elt,
                                       in DOMString pseudoElt);
};
```

Methods

`getComputedStyle`

This method is used to the computed style sheet as it defines in the [CSS2].

Parameters

`Element` [p.52]	`elt`	The element.
`DOMString` [p.19]	`pseudoElt`	The pseudo element or `null` if any.

Return Value

`CSSStyleDeclaration` [p.134]	The computed style. The `CSSStyleDeclaration` is read only.

No Exceptions

Interface *DocumentCSS*

This interface represents a document with a CSS view.

The `getOverrideStyle` method provides a mechanism through which a DOM author could effect immediate change to the style of an element without modifying the explicitly linked stylesheets of a document or the inline style of elements in the stylesheets. This style sheet comes after the author style sheet in the cascade algorithm and is called *override style sheet*. The override style sheet takes over author style sheet. An "!important" declaration still takes precedence over a normal declaration. Both override and user style sheets may contain "!important" declarations, and user "!important" rules takes precedence over override "!important" rules. Both author and override style sheets may contain "!important" declarations, and override "!important" rules takes precedence over author "!important" rules.

IDL Definition

```
interface DocumentCSS : stylesheets::DocumentStyle {
  CSSStyleDeclaration getOverrideStyle(in Element elt,
                                       in DOMString pseudoElt);
};
```

Methods

`getOverrideStyle`

This method is used to retrieve the override style sheet.

Parameters

`Element` [p.52]	`elt`	The element to be modified.
`DOMString` [p.19]	`pseudoElt`	The pseudo element or `null` if any.

Return Value

`CSSStyleDeclaration` [p.134]	The override style declaration.

No Exceptions

5.2.2. Style sheet creation

Interface *DOMImplementationCSS* (introduced in **DOM Level 2**)

This interface allows the DOM user to create a CSS style sheet outside the context of a document. There is no way to associate the new CSS style sheet with a document in DOM Level 2.

IDL Definition

```
// Introduced in DOM   Level 2:
interface DOMImplementationCSS : DOMImplementation {
  CSSStyleSheet      createCSSStyleSheet(in DOMString title,
                                         inout DOMString media);
};
```

Methods

`createCSSStyleSheet`

Creates a new CSS style sheet.

Parameters

`DOMString` [p.19]	`title`	The advisory title. See also Document Object Model StyleSheets [p.120] .
`DOMString`	`media`	The media associated to the new style sheet. See also Document Object Model StyleSheets [p.120] .

Return Value

`CSSStyleSheet` [p.126]	A new CSS style sheet.

No Exceptions

5.3. CSS Extended Interfaces

The interfaces found within this section are not mandatory. A DOM application can use the `hasFeature` method of the `DOMImplementation` [p.22] interface to determine whether they are supported or not. The feature string for all the extended interfaces listed in this section, except the `CSS2Properties` [p.171] interface, is "CSS2".

The following table specifies the type of `CSSValue` [p.138] used to represent each property that can be specified in a `CSSStyleDeclaration` [p.134] found in a `CSSStyleRule` [p.130] for a CSS Level 2 style sheet. The expectation is that the `CSSValue` returned from the `getPropertyCSSValue` method

on the `CSSStyleDeclaration` interface can be cast down, using binding-specific casting methods, to the specific derived interface.

For properties that are represented by a custom interface (the `valueType` of the `CSSValue` [p.138] is `CSS_CUSTOM`), the name of the derived interface is specified in the table. For properties that consist of lists of values (the `valueType` of the `CSSValue` is `CSS_VALUE_LIST`), the derived interface is `CSSValueList` [p.145] . For all other properties (the `valueType` of the `CSSValue` is `CSS_PRIMITIVE_VALUE`), the derived interface is `CSSPrimitiveValue` [p.139] .

Property Name	**Representation**
azimuth	`CSS2Azimuth` [p.154]
background	`null`
background-attachment	ident
background-color	rgbcolor, ident
background-image	uri, ident
background-position	`CSS2BackgroundPosition` [p.156]
background-repeat	ident
border	`null`
border-collapse	ident
border-color	`null`
border-spacing	`CSS2BorderSpacing` [p.159]
border-style	`null`
border-top, border-right, border-bottom, border-left	`null`
border-top-color, border-right-color, border-bottom-color, border-left-color	rgbcolor, ident
border-top-style, border-right-style, border-bottom-style, border-left-style	ident
border-top-width, border-right-width, border-bottom-width, border-left-width	length, ident
border-width	`null`
bottom	length, percentage, ident
caption-side	ident
clear	ident

clip	rect, ident
color	rgbcolor, ident
content	list of string, uri, counter, attr, ident
counter-increment	list of `CSS2CounterIncrement` [p.162]
counter-reset	list of `CSS2CounterReset` [p.161]
cue	`null`
cue-after, cue-before	uri, ident
cursor	`CSS2Cursor` [p.162]
direction	ident
display	ident
elevation	angle, ident
empty-cells	ident
float	ident
font	`null`
font-family	list of strings and idents
font-size	ident, length, percentage
font-size-adjust	number, ident
font-stretch	ident
font-style	ident
font-variant	ident
font-weight	ident
height	length, percentage, ident
left	length, percentage, ident
letter-spacing	ident, length
line-height	ident, length, percentage, number
list-style	`null`
list-style-image	uri, ident

list-style-position	ident
list-style-type	ident
margin	`null`
margin-top, margin-right, margin-bottom, margin-left	length, percentage, ident
marker-offset	length, ident
max-height	length, percentage, ident
max-width	length, percentage, ident
min-height	length, percentage, ident
min-width	length, percentage, ident
orphans	number
outline	`null`
outline-color	rgbcolor, ident
outline-style	ident
outline-width	length, ident
overflow	ident
padding	`null`
padding-top, padding-right, padding-bottom, padding-left	length, percentage
page	ident
page-break-after	ident
page-break-before	ident
page-break-inside	ident
pause	`null`
pause-after, pause-before	time, percentage
pitch	frequency, identifier
pitch-range	number
play-during	`CSS2PlayDuring` [p.163]
position	ident
quotes	list of string or ident

richness	number
right	length, percentage, ident
speak	ident
speak-header	ident
speak-numeral	ident
speak-punctuation	ident
speech-rate	number, ident
stress	number
table-layout	ident
text-align	ident, string
text-decoration	list of ident
text-indent	length, percentage
text-shadow	list of `CSS2TextShadow` [p.164]
text-transform	ident
top	length, percentage, ident
unicode-bidi	ident
vertical-align	ident, percentage, length
visibility	ident
voice-family	list of strings and idents
volume	number, percentage, ident
white-space	ident
widows	number
width	length, percentage, ident
word-spacing	length, ident
z-index	ident, number

Interface *CSS2Azimuth* (introduced in **DOM Level 2**)

The `CSS2Azimuth` interface represents the *azimuth* CSS Level 2 property.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSS2Azimuth : CSSValue {
  readonly attribute unsigned short   azimuthType;
  readonly attribute DOMString        identifier;
  readonly attribute boolean          behind;
  void               setAngleValue(in unsigned short uType,
                                   in float fValue)
                                     raises(DOMException);
  float              getAngleValue(in unsigned short uType)
                                     raises(DOMException);
  void               setIdentifier(in DOMString ident,
                                   in boolean b)
                                     raises(CSSException,
                                            DOMException);
};
```

Attributes

`azimuthType` of type `unsigned short`, readonly
: A code defining the type of the value as defined in `CSSValue` [p.138] . It would be one of `CSS_DEG`, `CSS_RAD`, `CSS_GRAD` or `CSS_IDENT`.

`identifier` of type `DOMString` [p.19] , readonly
: If `azimuthType` is `CSS_IDENT`, `identifier` contains one of left-side, far-left, left, center-left, center, center-right, right, far-right, right-side, leftwards, rightwards. The empty string if none is set.

`behind` of type `boolean`, readonly
: `behind` indicates whether the behind identifier has been set.

Methods

`setAngleValue`
: A method to set the angle value with a specified unit. This method will unset any previously set identifiers values.

Parameters

`unsigned short`	`uType`	The unitType could only be one of `CSS_DEG`, `CSS_RAD` or `CSS_GRAD`).
`float`	`fValue`	The new float value of the angle.

Exceptions

DOMException [p.21]	INVALID_ACCESS_ERR: Raised if the unit type is invalid. NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

No Return Value

`getAngleValue`

Used to retrieved the float value of the azimuth property.

Parameters

unsigned short	uType	The unit type can be only an angle unit type (CSS_DEG, CSS_RAD or CSS_GRAD).

Return Value

float	The float value.

Exceptions

DOMException [p.21]	INVALID_ACCESS_ERR: Raised if the unit type is invalid.

`setIdentifier`

Setting the identifier for the azimuth property will unset any previously set angle value. The value of azimuthType is set to CSS_IDENT

Parameters

DOMString [p.19]	ident	The new identifier. If the identifier is "leftwards" or "rightward", the behind attribute is ignored.
boolean	b	The new value for behind.

Exceptions

CSSException [p.126]	SYNTAX_ERR: Raised if the specified identifier has a syntax error and is unparsable.
DOMException [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

No Return Value

Interface *CSS2BackgroundPosition* (introduced in **DOM Level 2**)

The `CSS2BackgroundPosition` interface represents the *background-position* CSS Level 2 property.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSS2BackgroundPosition : CSSValue {
  readonly attribute unsigned short   horizontalType;
  readonly attribute unsigned short   verticalType;
  readonly attribute DOMString        horizontalIdentifier;
  readonly attribute DOMString        verticalIdentifier;
  float               getHorizontalPosition(in float hType)
                                      raises(DOMException);
  float               getVerticalPosition(in float vType)
                                      raises(DOMException);
  void                setHorizontalPosition(in unsigned short hType,
                                            in float value)
                                      raises(DOMException);
  void                setVerticalPosition(in unsigned short vType,
                                           in float value)
                                      raises(DOMException);
  void                setPositionIdentifier(in DOMString hIdentifier,
                                            in DOMString vIdentifier)
                                      raises(CSSException,
                                             DOMException);
};
```

Attributes

`horizontalType` of type `unsigned short`, readonly
: A code defining the type of the horizontal value. It would be one `CSS_PERCENTAGE`, `CSS_EMS`, `CSS_EXS`, `CSS_PX`, `CSS_CM`, `CSS_MM`, `CSS_IN`, `CSS_PT`, `CSS_PC` or `CSS_IDENT`. If one of horizontal or vertical is `CSS_IDENT`, it's guaranteed that the other is the same.

`verticalType` of type `unsigned short`, readonly
: A code defining the type of the horizontal value. The code can be one of the following units : `CSS_PERCENTAGE`, `CSS_EMS`, `CSS_EXS`, `CSS_PX`, `CSS_CM`, `CSS_MM`, `CSS_IN`, `CSS_PT`, `CSS_PC`, `CSS_IDENT`, `CSS_INHERIT`. If one of horizontal or vertical is `CSS_IDENT` or `CSS_INHERIT`, it's guaranteed that the other is the same.

`horizontalIdentifier` of type `DOMString` [p.19] , readonly
: If `horizontalType` is `CSS_IDENT` or `CSS_INHERIT`, this attribute contains the string representation of the ident, otherwise it contains an empty string.

`verticalIdentifier` of type `DOMString` [p.19] , readonly
: If `verticalType` is `CSS_IDENT` or `CSS_INHERIT`, this attribute contains the string representation of the ident, otherwise it contains an empty string. The value is `"center"` if only the horizontalIdentifier has been set.

Methods

`getHorizontalPosition`

This method is used to get the float value in a specified unit if the `horizontalPosition` represents a length or a percentage. If the float doesn't contain a float value or can't be converted into the specified unit, a `DOMException` [p.21] is raised.

Parameters

`float`	`hType`	The horizontal unit.

Return Value

`float`	The float value.

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the property doesn't contain a float or the value can't be converted.

`getVerticalPosition`

This method is used to get the float value in a specified unit if the `verticalPosition` represents a length or a percentage. If the float doesn't contain a float value or can't be converted into the specified unit, a `DOMException` [p.21] is raised. The value is `50%` if only the horizontal value has been specified.

Parameters

`float`	`vType`	The vertical unit.

Return Value

`float`	The float value.

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the property doesn't contain a float or the value can't be converted.

`setHorizontalPosition`

This method is used to set the horizontal position with a specified unit. If the vertical value is not a percentage or a length, it sets the vertical position to `50%`.

Parameters

`unsigned short`	`hType`	The specified unit (a length or a percentage).
`float`	`value`	The new value.

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the specified unit is not a length or a percentage. NO_MODIFICATION_ALLOWED_ERR: Raises if this property is readonly.

No Return Value

`setVerticalPosition`

This method is used to set the vertical position with a specified unit. If the horizontal value is not a percentage or a length, it sets the vertical position to `50%`.

Parameters

`unsigned short`	`vType`	The specified unit (a length or a percentage).
`float`	`value`	The new value.

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the specified unit is not a length or a percentage. NO_MODIFICATION_ALLOWED_ERR: Raises if this property is readonly.

No Return Value

`setPositionIdentifier`

Sets the identifiers. If the second identifier is the empty string, the vertical identifier is set to his default value (`"center"`).

Parameters

`DOMString` [p.19]	`hIdentifier`	The new horizontal identifier.
`DOMString`	`vIdentifier`	The new vertical identifier.

Exceptions

`CSSException` [p.126]	SYNTAX_ERR: Raises if the identifiers have a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raises if this property is readonly.

No Return Value

Interface *CSS2BorderSpacing* (introduced in **DOM Level 2**)

The `CSS2BorderSpacing` interface represents the *border-spacing* CSS Level 2 property.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSS2BorderSpacing : CSSValue {
  readonly attribute unsigned short   horizontalType;
  readonly attribute unsigned short   verticalType;
  float              getHorizontalSpacing(in float hType)
                                     raises(DOMException);
  float              getVerticalSpacing(in float vType)
                                     raises(DOMException);
  void               setHorizontalSpacing(in unsigned short hType,
                                       in float value)
                                     raises(DOMException);
  void               setVerticalSpacing(in unsigned short vType,
                                     in float value)
                                     raises(DOMException);
};
```

Attributes

`horizontalType` of type `unsigned short`, readonly

The A code defining the type of the value as defined in `CSSValue` [p.138] . It would be one of `CSS_EMS`, `CSS_EXS`, `CSS_PX`, `CSS_CM`, `CSS_MM`, `CSS_IN`, `CSS_PT` or `CSS_PC`.

`verticalType` of type `unsigned short`, readonly

The A code defining the type of the value as defined in `CSSValue` [p.138] . It would be one of `CSS_EMS`, `CSS_EXS`, `CSS_PX`, `CSS_CM`, `CSS_MM`, `CSS_IN`, `CSS_PT`, `CSS_PC` or `CSS_INHERIT`.

Methods

`getHorizontalSpacing`

This method is used to get the float value in a specified unit if the `horizontalSpacing` represents a length. If the float doesn't contain a float value or can't be converted into the specified unit, a `DOMException` [p.21] is raised.

Parameters

`float`	`hType`	The horizontal unit.

Return Value

`float`	The float value.

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the property doesn't contain a float or the value can't be converted.

`getVerticalSpacing`

This method is used to get the float value in a specified unit if the `verticalSpacing` represents a length. If the float doesn't contain a float value or can't be converted into the specified unit, a `DOMException` [p.21] is raised. The value is `0` if only the horizontal value has been specified.

Parameters

`float`	`vType`	The vertical unit.

Return Value

`float`	The float value.

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the property doesn't contain a float or the value can't be converted.

`setHorizontalSpacing`

This method is used to set the horizontal spacing with a specified unit. If the vertical value is a length, it sets the vertical spacing to `0`.

Parameters

`unsigned short`	`hType`	The horizontal unit.
`float`	`value`	The new value.

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the specified unit is not a length. NO_MODIFICATION_ALLOWED_ERR: Raises if this property is readonly.

No Return Value

`setVerticalSpacing`
This method is used to set the vertical spacing with a specified unit. If the horizontal value is not a length, it sets the vertical spacing to `0`.
Parameters

`unsigned short`	`vType`	The vertical unit.
`float`	`value`	The new value.

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the specified unit is not a length or a percentage. NO_MODIFICATION_ALLOWED_ERR: Raises if this property is readonly.

No Return Value

Interface *CSS2CounterReset* (introduced in **DOM Level 2**)

The `CSS2CounterReset` interface represents a simple value for the *counter-reset* CSS Level 2 property.
IDL Definition

```
// Introduced in DOM Level   2:
interface CSS2CounterReset : CSSValue {
           attribute DOMString        identifier;
                                        // raises(CSSException,
                                        //        DOMException) on setting

           attribute short            reset;
                                        // raises(DOMException) on setting

};
```

Attributes
`identifier` of type `DOMString` [p.19]
The element name.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified identifier has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this identifier is readonly.

`reset` of type `short`
The reset (default value is 0).
Exceptions on setting

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this identifier is readonly.

Interface *CSS2CounterIncrement* (introduced in **DOM Level 2**)

The `CSS2CounterIncrement` interface represents a simple value for the *counter-increment* CSS Level 2 property.
IDL Definition

```
// Introduced in DOM   Level 2:
interface CSS2CounterIncrement : CSSValue {
           attribute DOMString        identifier;
                                        // raises(CSSException,
                                        //        DOMException) on setting

           attribute short            increment;
                                        // raises(DOMException) on setting

};
```

Attributes
`identifier` of type `DOMString` [p.19]
The element name.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified identifier has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this identifier is readonly.

`increment` of type `short`
The increment (default value is 1).
Exceptions on setting

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this identifier is readonly.

Interface *CSS2Cursor* (introduced in **DOM Level 2**)

The `CSS2Cursor` interface represents the *cursor* CSS Level 2 property.
IDL Definition

```
// Introduced in DOM Level 2:
interface CSS2Cursor : CSSValue {
  readonly attribute CSSValueList     uris;
           attribute DOMString        predefinedCursor;
                                        // raises(CSSException,
                                        //        DOMException) on setting

};
```

Attributes

`uris` of type `CSSValueList` [p.145] , readonly

`uris` represents the list of URIs (`CSS_URI`) on the cursor property. The list can be empty.

`predefinedCursor` of type `DOMString` [p.19]

This identifier represents a generic cursor name or an empty string.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified CSS string value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this declaration is readonly.

Interface *CSS2PlayDuring* (introduced in **DOM Level 2**)

The `CSS2PlayDuring` interface represents the *play-during* CSS Level 2 property.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSS2PlayDuring : CSSValue {
  readonly attribute unsigned short   playDuringType;
           attribute DOMString        playDuringIdentifier;
                                        // raises(CSSException,
                                        //        DOMException) on setting

           attribute DOMString        uri;
                                        // raises(CSSException,
                                        //        DOMException) on setting

           attribute boolean          mix;
                                        // raises(DOMException) on setting

           attribute boolean          repeat;
                                        // raises(DOMException) on setting

};
```

Attributes

`playDuringType` of type `unsigned short`, readonly

A code defining the type of the value as define in `CSSvalue`. It would be one of `CSS_UNKNOWN` or `CSS_IDENT`.

`playDuringIdentifier` of type `DOMString` [p.19]
: One of `"inherit"`, `"auto"`, `"none"` or the empty string if the `playDuringType` is `CSS_UNKNOWN`. On setting, it will set the `uri` to the empty string and `mix` and `repeat` to `false`.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified CSS string value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this declaration is readonly.

`uri` of type `DOMString` [p.19]
: The sound specified by the `uri`. It will set the `playDuringType` attribute to `CSS_UNKNOWN`.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified CSS string value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this declaration is readonly.

`mix` of type `boolean`
: `true` if the sound should be mixed. It will be ignored if the attribute doesn't contain a `uri`.
Exceptions on setting

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this declaration is readonly.

`repeat` of type `boolean`
: `true` if the sound should be repeated. It will be ignored if the attribute doesn't contain a `uri`.
Exceptions on setting

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this declaration is readonly.

Interface *CSS2TextShadow* (introduced in **DOM Level 2**)

The `CSS2TextShadow` interface represents a simple value for the *text-shadow* CSS Level 2 property.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSS2TextShadow {
  readonly attribute CSSValue         color;
  readonly attribute CSSValue         horizontal;
  readonly attribute CSSValue         vertical;
  readonly attribute CSSValue         blur;
};
```

Attributes

`color` of type `CSSValue` [p.138] , readonly
: Specified the color of the text shadow. The CSS Value can contain an empty string if no color has been specified.

`horizontal` of type `CSSValue` [p.138] , readonly
: The horizontal position of the text shadow. `0` if no length has been specified.

`vertical` of type `CSSValue` [p.138] , readonly
: The vertical position of the text shadow. `0` if no length has been specified.

`blur` of type `CSSValue` [p.138] , readonly
: The blur radius of the text shadow. `0` if no length has been specified.

The following table specifies the type of `CSSValue` [p.138] used to represent each property that can be specified in a `CSSStyleDeclaration` [p.134] found in a `CSSFontFaceRule` [p.132] for a CSS Level 2 style sheet.

Property Name	Representation
font-family	list of strings and idents
font-style	list of idents
font-variant	list of idents
font-weight	list of idents
font-stretch	list of idents
font-size	list of lengths or ident
unicode-range	list of strings
units-per-em	number
src	list of `CSS2FontFaceSrc` [p.166]
panose-1	list of integers
stemv	number
stemh	number
slope	number
cap-height	number
x-height	number
ascent	number
descent	number
widths	list of `CSS2FontFaceWidths` [p.167]
bbox	list of numbers
definition-src	uri
baseline	number
centerline	number
mathline	number
topline	number

Interface *CSS2FontFaceSrc* (introduced in **DOM Level 2**)

The CSS2Cursor [p.162] interface represents the *src* CSS Level 2 descriptor.
IDL Definition

```
// Introduced in DOM Level 2:
interface CSS2FontFaceSrc {
           attribute DOMString        uri;
                                        // raises(CSSException,
                                        //        DOMException) on setting

  readonly attribute CSSValueList     format;
           attribute DOMString        fontFaceName;
                                        // raises(CSSException,
                                        //        DOMException) on setting

};
```

Attributes

`uri` of type DOMString [p.19]
Specifies the source of the font, empty string otherwise.
Exceptions on setting

CSSException [p.126]	SYNTAX_ERR: Raised if the specified CSS string value has a syntax error and is unparsable.
DOMException [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this declaration is readonly.

`format` of type CSSValueList [p.145] , readonly
This attribute contains a list of strings for the format CSS function.

`fontFaceName` of type DOMString [p.19]
Specifies the full font name of a locally installed font.
Exceptions on setting

CSSException [p.126]	SYNTAX_ERR: Raised if the specified CSS string value has a syntax error and is unparsable.
DOMException [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this declaration is readonly.

Interface *CSS2FontFaceWidths* (introduced in **DOM Level 2**)

The CSS2Cursor [p.162] interface represents a simple value for the *widths* CSS Level 2 descriptor.
IDL Definition

```
// Introduced in DOM Level 2:
interface CSS2FontFaceWidths {
           attribute DOMString        urange;
                                        // raises(CSSException,
                                        //        DOMException) on setting

  readonly attribute CSSValueList     numbers;
};
```

Attributes

`urange` of type `DOMString` [p.19]
The range for the characters.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the specified CSS string value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this declaration is readonly.

`numbers` of type `CSSValueList` [p.145] , readonly
A list of numbers representing the glyph widths.

The following table specifies the type of `CSSValue` [p.138] used to represent each property that can be specified in a `CSSStyleDeclaration` [p.134] found in a `CSSPageRule` [p.133] for a CSS Level 2 style sheet.

Property Name	**Representation**
margin	`null`
margin-top, margin,right, margin-bottom, margin-left	length (no CSS_EMS and CSS_EXS), percentage, ident
marks	list of idents
size	`CSS2PageSize` [p.168]

Interface *CSS2PageSize* (introduced in **DOM Level 2**)

The `CSS2Cursor` [p.162] interface represents the *size* CSS Level 2 descriptor.
IDL Definition

```
// Introduced in DOM Level 2:
interface CSS2PageSize : CSSValue {
  readonly attribute unsigned short   widthType;
  readonly attribute unsigned short   heightType;
  readonly attribute DOMString        identifier;
  float              getWidth(in float wType)
                                       raises(DOMException);
  float              getHeightSize(in float hType)
```

```
                                        raises(DOMException);
  void               setWidthSize(in unsigned short wType,
                                  in float value)
                                        raises(DOMException);
  void               setHeightSize(in unsigned short hType,
                                   in float value)
                                        raises(DOMException);
  void               setIdentifier(in DOMString ident)
                                        raises(CSSException,
                                               DOMException);
};
```

Attributes

`widthType` of type `unsigned short`, readonly
: A code defining the type of the width of the page. It would be one of `CSS_EMS`, `CSS_EXS`, `CSS_PX`, `CSS_CM`, `CSS_MM`, `CSS_IN`, `CSS_PT`, `CSS_PC` or `CSS_IDENT`.

`heightType` of type `unsigned short`, readonly
: A code defining the type of the height of the page. It would be one of `CSS_EMS`, `CSS_EXS`, `CSS_PX`, `CSS_CM`, `CSS_MM`, `CSS_IN`, `CSS_PT`, `CSS_PC` or `CSS_IDENT`. If one of width or height is `CSS_IDENT`, it's guaranteed that the other is the same.

`identifier` of type `DOMString` [p.19] , readonly
: If `width` is `CSS_IDENT`, this attribute contains the string representation of the ident, otherwise it contains an empty string.

Methods

`getWidth`
: This method is used to get the float value in a specified unit if the `widthType` represents a length. If the float doesn't contain a float value or can't be converted into the specified unit, a `DOMException` [p.21] is raised.

Parameters

`float`	`wType`	The width unit.

Return Value

`float`	The float value.

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the property doesn't contain a float or the value can't be converted.

`getHeightSize`
: This method is used to get the float value in a specified unit if the `heightType` represents a length. If the float doesn't contain a float value or can't be converted into the specified unit, a `DOMException` [p.21] is raised. If only the width value has been

specified, the height value is the same.

Parameters

`float`	`hType`	The height unit.

Return Value

`float`	The float value.

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the property doesn't contain a float or the value can't be converted.

`setWidthSize`

This method is used to set the width position with a specified unit. If the `heightType` is not a length, it sets the height position to the same value.

Parameters

`unsigned short`	`wType`	The width unit.
`float`	`value`	The new value.

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the specified unit is not a length or a percentage.
	NO_MODIFICATION_ALLOWED_ERR: Raises if this property is readonly.

No Return Value

`setHeightSize`

This method is used to set the height position with a specified unit. If the `widthType` is not a length, it sets the width position to the same value.

Parameters

`unsigned short`	`hType`	The height unit.
`float`	`value`	The new value.

Exceptions

`DOMException` [p.21]	INVALID_ACCESS_ERR: Raises if the specified unit is not a length or a percentage. NO_MODIFICATION_ALLOWED_ERR: Raises if this property is readonly.

No Return Value

`setIdentifier`
Sets the identifier.
Parameters

`DOMString` [p.19]	`ident`	The new identifier.

Exceptions

`CSSException` [p.126]	SYNTAX_ERR: Raises if the identifier has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raises if this property is readonly.

No Return Value

The following interface may be supported by a DOM implementation as a convenience. A DOM application can use the `hasFeature` method of the `DOMImplementation` [p.22] interface to determine whether the `CSS2Properties` [p.171] interface is supported or not. The feature string for the `CSS2Properties` interface is "CSS2Properties".

Interface *CSS2Properties* (introduced in **DOM Level 2**)

The `CSS2Properties` interface represents a convenience mechanism for retrieving and setting properties within a `CSSStyleDeclaration` [p.134] . The attributes of this interface correspond to all the *properties specified in CSS2*. Getting an attribute of this interface is equivalent to calling the `getPropertyValue` method of the `CSSStyleDeclaration` interface. Setting an attribute of this interface is equivalent to calling the `setProperty` method of the `CSSStyleDeclaration` interface.

A compliant implementation is not required to implement the `CSS2Properties` interface. If an implementation does implement this interface, the expectation is that language-specific methods can be used to cast from an instance of the `CSSStyleDeclaration` [p.134] interface to the `CSS2Properties` interface.

If an implementation does implement this interface, it is expected to understand the specific syntax of the shorthand properties, and apply their semantics; when the `margin` property is set, for example, the `marginTop`, `marginRight`, `marginBottom` and `marginLeft` properties are actually

being set by the underlying implementation.

When dealing with CSS "shorthand" properties, the shorthand properties should be decomposed into their component longhand properties as appropriate, and when querying for their value, the form returned should be the shortest form exactly equivalent to the declarations made in the ruleset. However, if there is no shorthand declaration that could be added to the ruleset without changing in any way the rules already declared in the ruleset (i.e., by adding longhand rules that were previously not declared in the ruleset), then the empty string should be returned for the shorthand property.

For example, querying for the `font` property should not return "normal normal normal 14pt/normal Arial, sans-serif", when "14pt Arial, sans-serif" suffices (the normals are initial values, and are implied by use of the longhand property).

If the values for all the longhand properties that compose a particular string are the initial values, then a string consisting of all the initial values should be returned (e.g. a `border-width` value of "medium" should be returned as such, not as "").

For some shorthand properties that take missing values from other sides, such as the `margin`, `padding`, and `border-[width|style|color]` properties, the minimum number of sides possible should be used, i.e., "0px 10px" will be returned instead of "0px 10px 0px 10px".

If the value of a shorthand property can not be decomposed into its component longhand properties, as is the case for the `font` property with a value of "menu", querying for the values of the component longhand properties should return the empty string.

IDL Definition

```
// Introduced in DOM Level 2:
interface CSS2Properties {
           attribute DOMString        azimuth;
                                        // raises(CSSException,
                                        //        DOMException) on setting

           attribute DOMString        background;
                                        // raises(CSSException,
                                        //        DOMException) on setting

           attribute DOMString        backgroundAttachment;
                                        // raises(CSSException,
                                        //        DOMException) on setting

           attribute DOMString        backgroundColor;
                                        // raises(CSSException,
                                        //        DOMException) on setting

           attribute DOMString        backgroundImage;
                                        // raises(CSSException,
                                        //        DOMException) on setting

           attribute DOMString        backgroundPosition;
                                        // raises(CSSException,
                                        //        DOMException) on setting
```

```
attribute DOMString        backgroundRepeat;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        border;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        borderCollapse;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        borderColor;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        borderSpacing;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        borderStyle;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        borderTop;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        borderRight;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        borderBottom;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        borderLeft;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        borderTopColor;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        borderRightColor;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        borderBottomColor;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        borderLeftColor;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        borderTopStyle;
```

```
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       borderRightStyle;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       borderBottomStyle;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       borderLeftStyle;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       borderTopWidth;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       borderRightWidth;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       borderBottomWidth;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       borderLeftWidth;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       borderWidth;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       bottom;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       captionSide;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       clear;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       clip;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       color;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       content;
                          // raises(CSSException,
```

```
                            //        DOMException) on setting

attribute DOMString         counterIncrement;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         counterReset;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         cue;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         cueAfter;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         cueBefore;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         cursor;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         direction;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         display;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         elevation;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         emptyCells;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         cssFloat;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         font;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         fontFamily;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         fontSize;
                            // raises(CSSException,
                            //        DOMException) on setting
```

```
attribute DOMString        fontSizeAdjust;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        fontStretch;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        fontStyle;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        fontVariant;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        fontWeight;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        height;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        left;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        letterSpacing;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        lineHeight;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        listStyle;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        listStyleImage;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        listStylePosition;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        listStyleType;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        margin;
                             // raises(CSSException,
                             //        DOMException) on setting
```

```
attribute DOMString        marginTop;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        marginRight;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        marginBottom;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        marginLeft;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        markerOffset;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        marks;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        maxHeight;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        maxWidth;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        minHeight;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        minWidth;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        orphans;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        outline;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        outlineColor;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        outlineStyle;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        outlineWidth;
```

```
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       overflow;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       padding;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       paddingTop;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       paddingRight;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       paddingBottom;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       paddingLeft;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       page;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       pageBreakAfter;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       pageBreakBefore;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       pageBreakInside;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       pause;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       pauseAfter;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       pauseBefore;
                          // raises(CSSException,
                          //        DOMException) on setting

attribute DOMString       pitch;
                          // raises(CSSException,
```

```
                            //        DOMException) on setting

attribute DOMString         pitchRange;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         playDuring;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         position;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         quotes;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         richness;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         right;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         size;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         speak;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         speakHeader;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         speakNumeral;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         speakPunctuation;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         speechRate;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         stress;
                            // raises(CSSException,
                            //        DOMException) on setting

attribute DOMString         tableLayout;
                            // raises(CSSException,
                            //        DOMException) on setting
```

```
attribute DOMString        textAlign;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        textDecoration;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        textIndent;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        textShadow;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        textTransform;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        top;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        unicodeBidi;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        verticalAlign;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        visibility;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        voiceFamily;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        volume;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        whiteSpace;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        widows;
                             // raises(CSSException,
                             //        DOMException) on setting

attribute DOMString        width;
                             // raises(CSSException,
                             //        DOMException) on setting
```

```
            attribute DOMString        wordSpacing;
                                         // raises(CSSException,
                                         //        DOMException) on setting

            attribute DOMString        zIndex;
                                         // raises(CSSException,
                                         //        DOMException) on setting

};
```

Attributes

`azimuth` of type `DOMString` [p.19]

See the *azimuth property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`background` of type `DOMString` [p.19]

See the *background property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`backgroundAttachment` of type `DOMString` [p.19]

See the *background-attachment property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`backgroundColor` of type `DOMString` [p.19]

See the *background-color property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`backgroundImage` of type `DOMString` [p.19]
See the *background-image property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`backgroundPosition` of type `DOMString` [p.19]
See the *background-position property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`backgroundRepeat` of type `DOMString` [p.19]
See the *background-repeat property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`border` of type `DOMString` [p.19]
See the *border property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderCollapse` of type `DOMString` [p.19]
See the *border-collapse property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderColor` of type `DOMString` [p.19]
See the *border-color property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderSpacing` of type `DOMString` [p.19]
See the *border-spacing property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderStyle` of type `DOMString` [p.19]
See the *border-style property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderTop` of type `DOMString` [p.19]
See the *border-top property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderRight` of type `DOMString` [p.19]

See the *border-right property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderBottom` of type `DOMString` [p.19]

See the *border-bottom property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderLeft` of type `DOMString` [p.19]

See the *border-left property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderTopColor` of type `DOMString` [p.19]

See the *border-top-color property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderRightColor` of type `DOMString` [p.19]
See the *border-right-color property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderBottomColor` of type `DOMString` [p.19]
See the *border-bottom-color property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderLeftColor` of type `DOMString` [p.19]
See the *border-left-color property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderTopStyle` of type `DOMString` [p.19]
See the *border-top-style property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderRightStyle` of type `DOMString` [p.19]
See the *border-right-style property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderBottomStyle` of type `DOMString` [p.19]
See the *border-bottom-style property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderLeftStyle` of type `DOMString` [p.19]
See the *border-left-style property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderTopWidth` of type `DOMString` [p.19]
See the *border-top-width property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderRightWidth` of type `DOMString` [p.19]
See the *border-right-width property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderBottomWidth` of type `DOMString` [p.19]
See the *border-bottom-width property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderLeftWidth` of type `DOMString` [p.19]
See the *border-left-width property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`borderWidth` of type `DOMString` [p.19]
See the *border-width property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`bottom` of type `DOMString` [p.19]
See the *bottom property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`captionSide` of type `DOMString` [p.19]
See the *caption-side property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`clear` of type `DOMString` [p.19]

See the *clear property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`clip` of type `DOMString` [p.19]

See the *clip property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`color` of type `DOMString` [p.19]

See the *color property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`content` of type `DOMString` [p.19]

See the *content property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`counterIncrement` of type `DOMString` [p.19]
See the *counter-increment property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`counterReset` of type `DOMString` [p.19]
See the *counter-reset property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`cue` of type `DOMString` [p.19]
See the *cue property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`cueAfter` of type `DOMString` [p.19]
See the *cue-after property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`cueBefore` of type `DOMString` [p.19]
See the *cue-before property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`cursor` of type `DOMString` [p.19]
See the *cursor property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`direction` of type `DOMString` [p.19]
See the *direction property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`display` of type `DOMString` [p.19]
See the *display property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`elevation` of type `DOMString` [p.19]
See the *elevation property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`emptyCells` of type `DOMString` [p.19]
See the *empty-cells property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`cssFloat` of type `DOMString` [p.19]
See the *float property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`font` of type `DOMString` [p.19]
See the *font property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`fontFamily` of type `DOMString` [p.19]
See the *font-family property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`fontSize` of type `DOMString` [p.19]
See the *font-size property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`fontSizeAdjust` of type `DOMString` [p.19]

See the *font-size-adjust property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`fontStretch` of type `DOMString` [p.19]

See the *font-stretch property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`fontStyle` of type `DOMString` [p.19]

See the *font-style property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`fontVariant` of type `DOMString` [p.19]

See the *font-variant property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`fontWeight` of type `DOMString` [p.19]
See the *font-weight property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`height` of type `DOMString` [p.19]
See the *height property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`left` of type `DOMString` [p.19]
See the *left property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`letterSpacing` of type `DOMString` [p.19]
See the *letter-spacing property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`lineHeight` of type `DOMString` [p.19]
See the *line-height property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`listStyle` of type `DOMString` [p.19]
See the *list-style property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`listStyleImage` of type `DOMString` [p.19]
See the *list-style-image property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`listStylePosition` of type `DOMString` [p.19]
See the *list-style-position property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`listStyleType` of type `DOMString` [p.19]
See the *list-style-type property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`margin` of type `DOMString` [p.19]
See the *margin property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`marginTop` of type `DOMString` [p.19]
See the *margin-top property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`marginRight` of type `DOMString` [p.19]
See the *margin-right property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`marginBottom` of type `DOMString` [p.19]
See the *margin-bottom property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`marginLeft` of type `DOMString` [p.19]
See the *margin-left property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`markerOffset` of type `DOMString` [p.19]
See the *marker-offset property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`marks` of type `DOMString` [p.19]
See the *marks property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`maxHeight` of type `DOMString` [p.19]
See the *max-height property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`maxWidth` of type `DOMString` [p.19]
See the *max-width property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`minHeight` of type `DOMString` [p.19]
See the *min-height property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`minWidth` of type `DOMString` [p.19]
See the *min-width property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`orphans` of type `DOMString` [p.19]
See the *orphans property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`outline` of type `DOMString` [p.19]
See the *outline property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`outlineColor` of type `DOMString` [p.19]
See the *outline-color property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`outlineStyle` of type `DOMString` [p.19]
See the *outline-style property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`outlineWidth` of type `DOMString` [p.19]
See the *outline-width property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`overflow` of type `DOMString` [p.19]
See the *overflow property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`padding` of type `DOMString` [p.19]
See the *padding property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`paddingTop` of type `DOMString` [p.19]
See the *padding-top property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`paddingRight` of type `DOMString` [p.19]
See the *padding-right property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`paddingBottom` of type `DOMString` [p.19]
See the *padding-bottom property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`paddingLeft` of type `DOMString` [p.19]
See the *padding-left property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`page` of type `DOMString` [p.19]
See the *page property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`pageBreakAfter` of type `DOMString` [p.19]

See the *page-break-after property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`pageBreakBefore` of type `DOMString` [p.19]

See the *page-break-before property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`pageBreakInside` of type `DOMString` [p.19]

See the *page-break-inside property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`pause` of type `DOMString` [p.19]

See the *pause property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`pauseAfter` of type `DOMString` [p.19]
See the *pause-after property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`pauseBefore` of type `DOMString` [p.19]
See the *pause-before property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`pitch` of type `DOMString` [p.19]
See the *pitch property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`pitchRange` of type `DOMString` [p.19]
See the *pitch-range property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`playDuring` of type `DOMString` [p.19]
See the *play-during property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`position` of type `DOMString` [p.19]
See the *position property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`quotes` of type `DOMString` [p.19]
See the *quotes property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`richness` of type `DOMString` [p.19]
See the *richness property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`right` of type `DOMString` [p.19]
See the *right property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`size` of type `DOMString` [p.19]
See the *size property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`speak` of type `DOMString` [p.19]
See the *speak property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`speakHeader` of type `DOMString` [p.19]
See the *speak-header property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`speakNumeral` of type `DOMString` [p.19]
See the *speak-numeral property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`speakPunctuation` of type `DOMString` [p.19]
See the *speak-punctuation property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`speechRate` of type `DOMString` [p.19]

See the *speech-rate property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`stress` of type `DOMString` [p.19]

See the *stress property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`tableLayout` of type `DOMString` [p.19]

See the *table-layout property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`textAlign` of type `DOMString` [p.19]

See the *text-align property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`textDecoration` of type `DOMString` [p.19]
See the *text-decoration property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`textIndent` of type `DOMString` [p.19]
See the *text-indent property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`textShadow` of type `DOMString` [p.19]
See the *text-shadow property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`textTransform` of type `DOMString` [p.19]
See the *text-transform property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`top` of type `DOMString` [p.19]
See the *top property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`unicodeBidi` of type `DOMString` [p.19]

See the *unicode-bidi property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`verticalAlign` of type `DOMString` [p.19]

See the *vertical-align property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`visibility` of type `DOMString` [p.19]

See the *visibility property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`voiceFamily` of type `DOMString` [p.19]

See the *voice-family property definition* in CSS2.

Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`volume` of type `DOMString` [p.19]
See the *volume property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`whiteSpace` of type `DOMString` [p.19]
See the *white-space property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`widows` of type `DOMString` [p.19]
See the *widows property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`width` of type `DOMString` [p.19]
See the *width property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`wordSpacing` of type `DOMString` [p.19]
See the *word-spacing property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

`zIndex` of type `DOMString` [p.19]
See the *z-index property definition* in CSS2.
Exceptions on setting

`CSSException` [p.126]	SYNTAX_ERR: Raised if the new value has a syntax error and is unparsable.
`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if this property is readonly.

5.4. HTML Extension

5.4.1. HTMLElement inline style

Interface *HTMLElementCSS* (introduced in **DOM Level 2**)

Inline style information attached to HTML elements is exposed through the `style` attribute. This represents the contents of the *STYLE* attribute for HTML elements.
IDL Definition

```
// Introduced in DOM   Level 2:
interface HTMLElementCSS : html::HTMLElement {
  readonly attribute CSSStyleDeclaration  style;
};
```

Attributes
`style` of type `CSSStyleDeclaration` [p.134] , readonly
The style attribute.

5.5. Unresolved Issues

1. We do not intend to provide access to the actual style of specific elements in this level of the CSS DOM. Implementation of the CSS DOM does not require an actual rendering engine for any other reason, and we see that requirement as a limitation on the potential implementations of the CSS DOM.
2. The group is undecided whether to put a cssText attribute on the CSSStyleSheet, which would provide a textual representation of the entire style sheet. Setting this attribute would result in the resetting of all the rules in the style sheet.

6. Document Object Model Events

Editors
Tom Pixley, Netscape Communications Corporation

6.1. Overview of the DOM Level 2 Event Model

The DOM Level 2 Event Model is designed with two main goals. The first goal is the design of a generic event system which allows registration of event handlers, describes event flow through a tree structure, and provides basic contextual information for each event. Additionally, the specification will provide standard sets of events for user interface control and document mutation notifications, including defined contextual information for each of these event sets.

The second goal of the event model is to provide a common subset of the current event systems used in *DOM Level 0* [p.434] browsers. This is intended to foster interoperability of existing scripts and content. It is not expected that this goal will be met with full backwards compatibility. However, the specification attempts to achieve this when possible.

The following sections of the Event Model specification define both the specification for the DOM Event Model and a number of compliant event sets designed for use within the model. The Event Model consists of the two sections on event propagation and event listener registration and the Event interface. A DOM consumer can use the `hasFeature` of the `DOMImplementation` [p.22] interface to determine whether the Event Model has been implemented by a DOM implementation. The feature string for the Event Model is "Events". The existence within an implementation of each of the individual event sets can also be queried using the `hasFeature` method. Each event set describes its own feature string in the event set listing.

6.1.1. Terminology

UI events
: User interface events. These events are generated by user interaction through an external device (mouse, keyboard, etc.)

UI Logical events
: Device independent user interface events such as focus change messages or element triggering notifications.

Mutation events
: Events caused by any action which modifies the structure of the document.

Capturing
: The process by which an event can be handled by one of the event's target's ancestors before being handled by the event's target.

Bubbling
: The process by which an event propagates upward through its ancestors after being handled by the event's target.

Cancelable
: A designation for events which indicates that upon handling the event the client may choose to prevent the DOM implementation from processing any default action associated with the event.

6.2. Description of event flow

Event flow is the process through which the an event originates from the DOM implementation and is passed into the Document Object Model. The methods of event capture and event bubbling, along with various event listener registration techniques, allow the event to then be handled in a number of ways. It can be handled locally at the `EventTarget` level or centrally from an `EventTarget` [p.211] higher in the document tree.

6.2.1. Basic event flow

Each event has an `EventTarget` [p.211] toward which the event is directed by the DOM implementation. This `EventTarget` is specified in the `Event` [p.215] 's `target` attribute. When the event reaches the target, any event listeners registered on the `EventTarget` are triggered. Although all `EventListener` [p.214] s on the `EventTarget` are guaranteed to receive the event, no specification is made as to the order in which they will receive the event with regards to the other `EventListeners` on the `EventTarget`. If neither event capture or event bubbling are in use for that particular event, the event flow process will complete after all listeners have been triggered. If event capture or event bubbling is in use, the event flow will be modified as described in the sections below.

Any exceptions thrown inside an `EventListener` [p.214] will not stop propagation of the event. It will continue processing any additional `EventListener` in the described manner.

6.2.2. Event Capture

Event capture is the process by which an EventListener registered on an ancestor of the event's target can intercept events of a given type before they are received by the event's target. Capture operates from the top of the tree downward, making it the symmetrical opposite of bubbling which is described below.

An `EventListener` [p.214] being registered on an `EventTarget` [p.211] may choose to have that `EventListener` capture events by specifying the `useCapture` parameter of the `addEventListener` method to be `true`. Thereafter, when an event of the given type is dispatched toward a descendant of the capturing object, the event will trigger any capturing event listeners of the appropriate type which exist in the direct line between the top of the document and the event's target. This downward propagation continues until the event's target is reached. A capturing `EventListener` will not be triggered by events dispatched directly the the `EventTarget` upon which it is registered.

If the capturing `EventListener` [p.214] wishes to prevent further processing of the event, either later in the capture phase or during bubbling, it may call the `preventCapture` method of the `Event` [p.215] interface. This will prevent further dispatch of the event to additional `EventTargets` lower in the tree structure, although additional `EventListeners` registered at the same hierarchy level will still receive the event. Once an event's `preventCapture` method has been called, further calls to that method have no additional effect. If no additional capturers exist and `preventCapture` has not been called, the event triggers the appropriate `EventListeners` on the target itself.

Although event capture is similar to the delegation based event model in which all interested parties register their listeners directly on the target about which they wish to receive notifications, it is different in two important respects. First, event capture only allows interception of events which are targeted at descendants of the capturing `Node` [p.34] . It does not allow interception of events targeted to the capturer's ancestors, its siblings, or its sibling's descendants. Secondly, event capture is not specified for a single `Node`, it is specified for a specific type of event. Once specified, event capture intercepts all events of the specified type targeted toward any of the capturer's descendants.

6.2.3. Event bubbling

Events which are designated as bubbling will initially proceed with the same event flow as non-bubbling events. The event is dispatched to its target `Node` [p.34] and any event listeners found there are triggered. Bubbling events will then trigger any additional event listeners found by following the `Node`'s parent chain upward, checking for any event listeners registered on each successive `Node`. This upward propagation will continue up to and including the `Document` [p.25] .

Any event handler may choose to prevent continuation of the bubbling process by calling the `preventBubble` method of the `Event` [p.215] interface. If any `EventListener` [p.214] calls this method, all additional `EventListeners` on the current `EventTarget` [p.211] will be triggered but bubbling will cease at that level. Only one call to `preventBubble` is required to prevent further bubbling.

6.2.4. Event cancelation

Some events are specified as cancelable. For these events, the DOM implementation generally has a default action associated with the event. Before processing these events, the implementation must check for event listeners registered to receive the event and dispatch the event to those listeners. These listeners then have the option of canceling the implementation's default action or allowing the default action to proceed. Cancelation is accomplished by calling the `Event` [p.215] 's `preventDefault` method. If one or more `EventListener` [p.214] s call `preventDefault` during any phase of event flow the default action will be canceled.

6.3. Event listener registration

6.3.1. Event registration interfaces

Interface *EventTarget* (introduced in **DOM Level 2**)

> The `EventTarget` interface is implemented by all `Node` [p.34] s in an implementation which supports the DOM Event Model. The interface allows registration and removal of `EventListener` [p.214] s on an `EventTarget` and dispatch of events to that `EventTarget`.
> **IDL Definition**

```
// Introduced in DOM Level 2:
interface EventTarget {
  void               addEventListener(in DOMString type,
                                      in EventListener listener,
                                      in boolean useCapture);
  void               removeEventListener(in DOMString type,
                                         in EventListener listener,
                                         in boolean useCapture);
  boolean            dispatchEvent(in Event evt)
                                     raises(DOMException);
};
```

Methods

`addEventListener`

This method allows the registration of event listeners on the event target.

Parameters

`DOMString` [p.19]	`type`	The event type for which the user is registering
`EventListener` [p.214]	`listener`	The `listener` parameter takes an interface implemented by the user which contains the methods to be called when the event occurs.
`boolean`	`useCapture`	If true, `useCapture` indicates that the user wishes to initiate capture. After initiating capture, all events of the specified type will be dispatched to the registered `EventListener` before being dispatched to any `EventTargets` beneath them in the tree. Events which are bubbling upward through the tree will not trigger an `EventListener` designated to use capture. If an `EventListener` is added to an `EventTarget` which is currently processing an event the new listener will not be triggered by the current event.

No Return Value

No Exceptions

`removeEventListener`

This method allows the removal of event listeners from the event target. If an `EventListener` [p.214] is removed from an `EventTarget` while it is processing an

event, it will complete its current actions but will not be triggered again during any later stages of event flow.
If an `EventListener` [p.214] is removed from an `EventTarget` which is currently processing an event the removed listener will still be triggered by the current event.
Parameters

`DOMString` [p.19]	`type`	Specifies the event type of the `EventListener` [p.214] being removed.
`EventListener` [p.214]	`listener`	The `EventListener` parameter indicates the `EventListener` to be removed.
`boolean`	`useCapture`	Specifies whether the `EventListener` being removed was registered as a capturing listener or not. If a listener was registered twice, one with capture and one without, each must be removed separately. Removal of a capturing listener does not affect a non-capturing version of the same listener, and vice versa.

No Return Value
No Exceptions

`dispatchEvent`
This method allows the dispatch of events into the implementations event model. Events dispatched in this manner will have the same capturing and bubbling behavior as events dispatched directly by the implementation. The target of the event is the `EventTarget` on which `dispatchEvent` is called.
Parameters

`Event` [p.215]	`evt`	Specifies the event type, behavior, and contextual information to be used in processing the event.

Return Value

`boolean`	The return value of `dispatchEvent` indicates whether any of the listeners which handled the event called `preventDefault`. If `preventDefault` was called the value is false, else the value is true.

Exceptions

`DOMException` [p.21]	UNSPECIFIED_EVENT_TYPE: Raised if the `Event` [p.215] 's type was not specified by initializing the event before `dispatchEvent` was called.

Interface *EventListener* (introduced in **DOM Level 2**)

The `EventListener` interface is the primary method for handling events. Users implement the `EventListener` interface and register their listener on an `EventTarget` [p.211] using the `AddEventListener` method. The users should also remove their `EventListener` from its `EventTarget` after they have completed using the listener.

IDL Definition

```
// Introduced in DOM Level 2:
interface EventListener {
  void               handleEvent(in Event evt);
};
```

Methods

`handleEvent`

This method is called whenever an event occurs of the type for which the `EventListener` interface was registered.

Parameters

`Event` [p.215]	`evt`	The `Event` contains contextual information about the event. It also contains the `preventDefault`, `preventBubble`, and `preventCapture` methods which are used in determining the event's flow and default action.

No Return Value

No Exceptions

6.3.2. Interaction with HTML 4.0 event listeners

In HTML 4.0, event listeners were specified as attributes of an element. As such, registration of a second event listener of the same type would replace the first listener. The DOM Event Model allows registration of multiple event listeners on a single `Node` [p.34] . To achieve this, event listeners are no longer stored as attribute values.

In order to achieve compatibility with HTML 4.0, implementors may view the setting of attributes which represent event handlers as the creation and registration of an `EventListener` on the `Node` [p.34] . The value of `useCapture` defaults to `false`. This `EventListener` [p.214] behaves in the same manner as any other `EventListeners` which may be registered on the `EventTarget` [p.211] . If the attribute representing the event listener is changed, this may be viewed as the removal of the previously registered `EventListener` and the registration of a new one. No technique is provided to allow HTML

4.0 event listeners access to the context information defined for each event.

6.4. Event interface

Interface *Event* (introduced in **DOM Level 2**)

The `Event` interface is used to provide contextual information about an event to the handler processing the event. An object which implements the `Event` interface is generally passed as the first parameter to an event handler. More specific context information is passed to event handlers by deriving additional interfaces from `Event` which contain information directly relating to the type of event they accompany. These derived interfaces are also implemented by the object passed to the event listener.

IDL Definition

```
// Introduced in DOM Level 2:
interface Event {
  // PhaseType
  const unsigned short      BUBBLING_PHASE                = 1;
  const unsigned short      CAPTURING_PHASE               = 2;
  const unsigned short      AT_TARGET                     = 3;

  readonly attribute DOMString        type;
  readonly attribute EventTarget      target;
  readonly attribute Node             currentNode;
  readonly attribute unsigned short   eventPhase;
  readonly attribute boolean          bubbles;
  readonly attribute boolean          cancelable;
  void               preventBubble();
  void               preventCapture();
  void               preventDefault();
  void               initEvent(in DOMString eventTypeArg,
                               in boolean canBubbleArg,
                               in boolean cancelableArg);
};
```

Definition group *PhaseType*

An integer indicating which phase of event flow is being processed.

Defined Constants

BUBBLING_PHASE	The current event phase is the bubbling phase.
CAPTURING_PHASE	The current event phase is the capturing phase.
AT_TARGET	The event is currently being evaluated at the target node.

Attributes

`type` of type `DOMString` [p.19] , readonly

The `type` property represents the event name as a string property.

`target` of type `EventTarget` [p.211] , readonly
: The `target` property indicates the `EventTarget` [p.211] to which the event was originally dispatched.

`currentNode` of type `Node` [p.34] , readonly
: The `currentNode` property indicates the `Node` [p.34] whose `EventListener` [p.214] s are currently being processed. This is particularly useful during capturing and bubbling.

`eventPhase` of type `unsigned short`, readonly
: The `eventPhase` property indicates which phase of event flow is currently being evaluated.

`bubbles` of type `boolean`, readonly
: The `bubbles` property indicates whether or not an event is a bubbling event. If the event can bubble the value is true, else the value is false.

`cancelable` of type `boolean`, readonly
: The `cancelable` property indicates whether or not an event can have its default action prevented. If the default action can be prevented the value is true, else the value is false.

Methods

`preventBubble`
: The `preventBubble` method is used to end the bubbling phase of event flow. If this method is called by any `EventListener` [p.214] s registered on the same `EventTarget` [p.211] during bubbling, the bubbling phase will cease at that level and the event will not be propagated upward within the tree.
No Parameters
No Return Value
No Exceptions

`preventCapture`
: The `preventCapture` method is used to end the capturing phase of event flow. If this method is called by any `EventListener` [p.214] s registered on the same `EventTarget` [p.211] during capturing, the capturing phase will cease at that level and the event will not be propagated any further down.
No Parameters
No Return Value
No Exceptions

`preventDefault`
: If an event is cancelable, the `preventCapture` method is used to signify that the event is to be canceled, meaning any default action normally taken by the implementation as a result of the event will not occur . If, during any stage of event flow, the `preventDefault` method is called the event is canceled. Any default action associated with the event will not occur. Calling this method for a non-cancelable event has no effect. Once `preventDefault` has been called it will remain in effect throughout the remainder of the event's propagation.
No Parameters

No Return Value
No Exceptions

`initEvent`
Parameters

`DOMString` [p.19]	`eventTypeArg`	Specifies the event type. This type may be any event type currently defined in this specification or a new event type. Any new event type must not begin with any upper, lower, or mixed case version of the string "DOM". This prefix is reserved for future DOM event sets.
`boolean`	`canBubbleArg`	Specifies whether or not the event can bubble.
`boolean`	`cancelableArg`	Specifies whether or not the event's default action can be prevented.

No Return Value
No Exceptions

6.5. DocumentEvent interface

Interface *DocumentEvent* (introduced in **DOM Level 2**)

The `DocumentEvent` interface provides a mechanism by which the a user can create an Event of a type supported by the implementation. It is expected that the `DocumentEvent` interface will be implemented on the same object which implements the `Document` [p.25] interface in an implementation which supports the Event model.
IDL Definition

```
// Introduced in DOM Level 2:
interface DocumentEvent {
  Event             createEvent(in DOMString type)
                                        raises(DOMException);
};
```

Methods
`createEvent`
Parameters

DOMString [p.19]	type	The type paramater specifies the type of Event [p.215] to be created. If the Event type specified is supported by the implementation this method will return a new Event of the type requested. If the Event is to be dispatched via the dispatchEvent method the appropriate event init method must be called after creation in order to initialize the Event's values.

Return Value

Event [p.215]	The newly created Event

Exceptions

DOMException [p.21]	UNSUPPORTED_EVENT_TYPE: Raised if the implementation does not support the type of Event [p.215] requested

6.6. Event set definitions

The DOM Level 2 Event Model allows a DOM implementation to support multiple sets of events. The model has been designed to allow addition of new event sets as is required. The DOM will not attempt to define all possible events. For purposes of interoperability, the DOM will define a set of user interface events including lower level device dependent events, a set of UI logical events, and a set of document mutation events.

6.6.1. User Interface event types

The User Interface event set is composed of events listed in HTML 4.0 and additional events which are supported in *DOM Level 0* [p.434] browsers.

A DOM consumer can use the hasFeature of the DOMImplementation [p.22] interface to determine whether the User Interface event set has been implemented by a DOM implementation. The feature string for this event set is "UIEvents".

Interface *UIEvent* (introduced in **DOM Level 2**)

The UIEvent interface provides specific contextual information associated with User Interface events.

IDL Definition

```
// Introduced in DOM Level 2:
interface UIEvent : Event {
  readonly attribute views::AbstractView  view;
  readonly attribute unsigned short   detail;
  void               initUIEvent(in DOMString typeArg,
                                 in boolean canBubbleArg,
                                 in boolean cancelableArg,
                                 in views::AbstractView viewArg,
                                 in unsigned short detailArg);
};
```

Attributes

`view` of type `views::AbstractView`, readonly

The `view` attribute identifies the `AbstractView` [p.117] from which the event was generated.

`detail` of type `unsigned short`, readonly

Specifies some detail information about the `Event` [p.215] , depending on the type of event.

Methods

`initUIEvent`

Parameters

`DOMString` [p.19]	`typeArg`	Specifies the event type.
`boolean`	`canBubbleArg`	Specifies whether or not the event can bubble.
`boolean`	`cancelableArg`	Specifies whether or not the event's default action can be prevent.
`views::AbstractView`	`viewArg`	Specifies the `Event` [p.215] 's `AbstractView` [p.117] .
`unsigned short`	`detailArg`	Specifies the `Event` [p.215] 's detail.

No Return Value

No Exceptions

The different types of such events that can occur are:

resize

The resize event occurs when a document view is resized.

- Bubbles: Yes
- Cancelable: No

- Context Info: None

scroll

The scroll event occurs when a document view is scrolled.

- Bubbles: Yes
- Cancelable: No
- Context Info: None

focusin

The focusin event occurs when a node receives focus, for instance via a pointing device being moved onto an element or by tabbing navigation to the element. Unlike the HTML event focus, focusin can be applied to any node, not just FORM controls.

- Bubbles: No
- Cancelable: No
- Context Info: None

focusout

The focusout event occurs when a node loses focus, for instance via a pointing device being moved out of an element or by tabbing navigation out of the element. Unlike the HTML event blur, focusout can be applied to any node, not just FORM controls.

- Bubbles: No
- Cancelable: No
- Context Info: None

gainselection

The gainselection event occurs when a node or part of it is selected (unlike the HTML event select, it can be applied to any element, not just HTML FORM controls). For each selected node a gainselection event, which can be handled locally or thru bubbling by a root node selection handler, is generated.

- Bubbles: Yes
- Cancelable: No
- Context Info: range

loseselection

The loseselection event occurs when a node or part of it is deselected, for example because the user selects something else.

- Bubbles: Yes
- Cancelable: No
- Context Info: range

activate

The activate event occurs when an element is activated, for instance, thru a mouse click or a keypress. A numerical argument is provided to give an indication of the type of activation that occurs: 1 for a simple activation (e.g. a simple click or Enter), 2 for hyperactivation (for instance a double click or Shift Enter).

- Bubbles: Yes
- Cancelable: Yes
- Context Info: detail (the numerical value)

6.6.2. Mouse event types

The Mouse event set is composed of events listed in HTML 4.0 and additional events which are supported in *DOM Level 0* [p.434] browsers. This event set is specifically for use with mouse input devices.

A DOM consumer can use the `hasFeature` of the `DOMImplementation` [p.22] interface to determine whether the User Interface event set has been implemented by a DOM implementation. The feature string for this event set is "MouseEvents".

Interface *MouseEvent* (introduced in **DOM Level 2**)

The `MouseEvent` interface provides specific contextual information associated with Mouse events.

The `detail` attribute inherited from `UIEvent` [p.218] indicates the number of times a mouse button has been pressed and released over the same screen location during a user action. The attribute value is 1 when the user begins this action and increments by 1 for each full sequence of pressing and releasing. If the user moves the mouse between the mousedown and mouseup the value will be set to 0, indicating that no click is occurring.

IDL Definition

```
// Introduced in DOM Level 2:
interface MouseEvent : UIEvent {
  readonly attribute long             screenX;
  readonly attribute long             screenY;
  readonly attribute long             clientX;
  readonly attribute long             clientY;
  readonly attribute boolean          ctrlKey;
  readonly attribute boolean          shiftKey;
  readonly attribute boolean          altKey;
  readonly attribute boolean          metaKey;
  readonly attribute unsigned short   button;
  readonly attribute Node             relatedNode;
  void               initMouseEvent(in DOMString typeArg,
                                    in boolean canBubbleArg,
                                    in boolean cancelableArg,
                                    in views::AbstractView viewArg,
                                    in unsigned short detailArg,
                                    in long screenXArg,
                                    in long screenYArg,
                                    in long clientXArg,
                                    in long clientYArg,
                                    in boolean ctrlKeyArg,
                                    in boolean altKeyArg,
                                    in boolean shiftKeyArg,
                                    in boolean metaKeyArg,
                                    in unsigned short buttonArg,
                                    in Node relatedNodeArg);
};
```

Attributes

`screenX` of type `long`, readonly

`screenX` indicates the horizontal coordinate at which the event occurred in relative to the origin of the screen coordinate system.

`screenY` of type `long`, readonly
: `screenY` indicates the vertical coordinate at which the event occurred relative to the origin of the screen coordinate system.

`clientX` of type `long`, readonly
: `clientX` indicates the horizontal coordinate at which the event occurred relative to the DOM implementation's client area.

`clientY` of type `long`, readonly
: `clientY` indicates the vertical coordinate at which the event occurred relative to the DOM implementation's client area.

`ctrlKey` of type `boolean`, readonly
: `ctrlKey` indicates whether the 'ctrl' key was depressed during the firing of the event.

`shiftKey` of type `boolean`, readonly
: `shiftKey` indicates whether the 'shift' key was depressed during the firing of the event.

`altKey` of type `boolean`, readonly
: `altKey` indicates whether the 'alt' key was depressed during the firing of the event. On some platforms this key may map to an alternative key name.

`metaKey` of type `boolean`, readonly
: `metaKey` indicates whether the 'meta' key was depressed during the firing of the event. On some platforms this key may map to an alternative key name.

`button` of type `unsigned short`, readonly
: During mouse events caused by the depression or release of a mouse button, `button` is used to indicate which mouse button changed state.

`relatedNode` of type `Node` [p.34] , readonly
: `relatedNode` is used to identify a secondary node related to a UI event.

Methods

`initMouseEvent`

Parameters

`DOMString` [p.19]	`typeArg`	Specifies the event type.
`boolean`	`canBubbleArg`	Specifies whether or not the event can bubble.
`boolean`	`cancelableArg`	Specifies whether or not the event's default action can be prevent.

`views::AbstractView`	`viewArg`	Specifies the `Event` [p.215] 's `AbstractView` [p.117] .
`unsigned short`	`detailArg`	Specifies the `Event` [p.215] 's mouse click count.
`long`	`screenXArg`	Specifies the `Event` [p.215] 's screen x coordinate
`long`	`screenYArg`	Specifies the `Event` [p.215] 's screen y coordinate
`long`	`clientXArg`	Specifies the `Event` [p.215] 's client x coordinate
`long`	`clientYArg`	Specifies the `Event` [p.215] 's client y coordinate
`boolean`	`ctrlKeyArg`	Specifies whether or not control key was depressed during the `Event` [p.215] .
`boolean`	`altKeyArg`	Specifies whether or not alt key was depressed during the `Event` [p.215] .
`boolean`	`shiftKeyArg`	Specifies whether or not shift key was depressed during the `Event` [p.215] .
`boolean`	`metaKeyArg`	Specifies whether or not meta key was depressed during the `Event` [p.215] .
`unsigned short`	`buttonArg`	Specifies the `Event` [p.215] 's mouse button.

`Node` [p.34]	`relatedNodeArg`	Specifies the `Event` [p.215] 's related Node.

No Return Value
No Exceptions

The different types of Mouse events that can occur are:

click
The click event occurs when the pointing device button is clicked over an element. A click is defined as a mousedown and mouseup over the same screen location. The sequence of these events is:

```
mousedown
mouseup
click
```

If multiple clicks occur at the same screen location, the sequence repeats with the `detail` attribute incrementing with each repetition. This event is valid for most elements.

- Bubbles: Yes
- Cancelable: Yes
- Context Info: screenX, screenY, clientX, clientY, altKey, ctrlKey, shiftKey, metaKey, button, detail

mousedown
The mousedown event occurs when the pointing device button is pressed over an element. This event is valid for most elements.

- Bubbles: Yes
- Cancelable: Yes
- Context Info: screenX, screenY, clientX, clientY, altKey, ctrlKey, shiftKey, metaKey, button, detail

mouseup
The mouseup event occurs when the pointing device button is released over an element. This event is valid for most elements.

- Bubbles: Yes
- Cancelable: Yes
- Context Info: screenX, screenY, clientX, clientY, altKey, ctrlKey, shiftKey, metaKey, button, detail

mouseover
The mouseover event occurs when the pointing device is moved onto an element. This event is valid for most elements.

- Bubbles: Yes
- Cancelable: Yes
- Context Info: screenX, screenY, clientX, clientY, altKey, ctrlKey, shiftKey, metaKey, relatedNode

mousemove
The mousemove event occurs when the pointing device is moved while it is over an element. This event is valid for most elements.

- Bubbles: Yes
- Cancelable: No
- Context Info: screenX, screenY, clientX, clientY, altKey, ctrlKey, shiftKey, metaKey

mouseout

The mouseout event occurs when the pointing device is moved away from an element. This event is valid for most elements..

- Bubbles: Yes
- Cancelable: Yes
- Context Info: screenX, screenY, clientX, clientY, altKey, ctrlKey, shiftKey, metaKey, relatedNode

6.6.3. Key event types

The Key event set is composed of events listed in HTML 4.0 and additional events which are supported in *DOM Level 0* [p.434] browsers. This event set is specifically for use with keyboard input devices.

A DOM consumer can use the `hasFeature` of the `DOMImplementation` [p.22] interface to determine whether the Key event set has been implemented by a DOM implementation. The feature string for this event set is "KeyEvents".

Interface *KeyEvent* (introduced in **DOM Level 2**)

The `KeyEvent` interface provides specific contextual information associated with Key events.

IDL Definition

```
// Introduced in DOM Level 2:
interface KeyEvent : UIEvent {
  // VirtualKeyCode
  const unsigned long       CHAR_UNDEFINED               = 0x0FFFF;
  const unsigned long       DOM_VK_0                     = 0x30;
  const unsigned long       DOM_VK_1                     = 0x31;
  const unsigned long       DOM_VK_2                     = 0x32;
  const unsigned long       DOM_VK_3                     = 0x33;
  const unsigned long       DOM_VK_4                     = 0x34;
  const unsigned long       DOM_VK_5                     = 0x35;
  const unsigned long       DOM_VK_6                     = 0x36;
  const unsigned long       DOM_VK_7                     = 0x37;
  const unsigned long       DOM_VK_8                     = 0x38;
  const unsigned long       DOM_VK_9                     = 0x39;
  const unsigned long       DOM_VK_A                     = 0x41;
  const unsigned long       DOM_VK_ACCEPT                = 0x1E;
  const unsigned long       DOM_VK_ADD                   = 0x6B;
  const unsigned long       DOM_VK_AGAIN                 = 0xFFC9;
  const unsigned long       DOM_VK_ALL_CANDIDATES        = 0x0100;
  const unsigned long       DOM_VK_ALPHANUMERIC          = 0x00F0;
  const unsigned long       DOM_VK_ALT                   = 0x12;
  const unsigned long       DOM_VK_ALT_GRAPH             = 0xFF7E;
  const unsigned long       DOM_VK_AMPERSAND             = 0x96;
  const unsigned long       DOM_VK_ASTERISK              = 0x97;
  const unsigned long       DOM_VK_AT                    = 0x0200;
  const unsigned long       DOM_VK_B                     = 0x42;
  const unsigned long       DOM_VK_BACK_QUOTE            = 0xC0;
```

```
const unsigned long       DOM_VK_BACK_SLASH             = 0x5C;
const unsigned long       DOM_VK_BACK_SPACE             = 0x08;
const unsigned long       DOM_VK_BRACELEFT              = 0xA1;
const unsigned long       DOM_VK_BRACERIGHT             = 0xA2;
const unsigned long       DOM_VK_C                      = 0x43;
const unsigned long       DOM_VK_CANCEL                 = 0x03;
const unsigned long       DOM_VK_CAPS_LOCK              = 0x14;
const unsigned long       DOM_VK_CIRCUMFLEX             = 0x0202;
const unsigned long       DOM_VK_CLEAR                  = 0x0C;
const unsigned long       DOM_VK_CLOSE_BRACKET          = 0x5D;
const unsigned long       DOM_VK_CODE_INPUT             = 0x0102;
const unsigned long       DOM_VK_COLON                  = 0x0201;
const unsigned long       DOM_VK_COMMA                  = 0x2C;
const unsigned long       DOM_VK_COMPOSE                = 0xFF20;
const unsigned long       DOM_VK_CONTROL                = 0x11;
const unsigned long       DOM_VK_CONVERT                = 0x1C;
const unsigned long       DOM_VK_COPY                   = 0xFFCD;
const unsigned long       DOM_VK_CUT                    = 0xFFD1;
const unsigned long       DOM_VK_D                      = 0x44;
const unsigned long       DOM_VK_DEAD_ABOVEDOT          = 0x86;
const unsigned long       DOM_VK_DEAD_ABOVERING         = 0x88;
const unsigned long       DOM_VK_DEAD_ACUTE             = 0x81;
const unsigned long       DOM_VK_DEAD_BREVE             = 0x85;
const unsigned long       DOM_VK_DEAD_CARON             = 0x8A;
const unsigned long       DOM_VK_DEAD_CEDILLA           = 0x8B;
const unsigned long       DOM_VK_DEAD_CIRCUMFLEX        = 0x82;
const unsigned long       DOM_VK_DEAD_DIAERESIS         = 0x87;
const unsigned long       DOM_VK_DEAD_DOUBLEACUTE       = 0x89;
const unsigned long       DOM_VK_DEAD_GRAVE             = 0x80;
const unsigned long       DOM_VK_DEAD_IOTA              = 0x8D;
const unsigned long       DOM_VK_DEAD_MACRON            = 0x84;
const unsigned long       DOM_VK_DEAD_OGONEK            = 0x8C;
const unsigned long       DOM_VK_DEAD_SEMIVOICED_SOUND  = 0x8F;
const unsigned long       DOM_VK_DEAD_TILDE             = 0x83;
const unsigned long       DOM_VK_DEAD_VOICED_SOUND      = 0x8E;
const unsigned long       DOM_VK_DECIMAL                = 0x6E;
const unsigned long       DOM_VK_DELETE                 = 0x7F;
const unsigned long       DOM_VK_DIVIDE                 = 0x6F;
const unsigned long       DOM_VK_DOLLAR                 = 0x0203;
const unsigned long       DOM_VK_DOWN                   = 0x28;
const unsigned long       DOM_VK_E                      = 0x45;
const unsigned long       DOM_VK_END                    = 0x23;
const unsigned long       DOM_VK_ENTER                  = 0x0D;
const unsigned long       DOM_VK_EQUALS                 = 0x3D;
const unsigned long       DOM_VK_ESCAPE                 = 0x1B;
const unsigned long       DOM_VK_EURO_SIGN              = 0x0204;
const unsigned long       DOM_VK_EXCLAMATION_MARK       = 0x0205;
const unsigned long       DOM_VK_F                      = 0x46;
const unsigned long       DOM_VK_F1                     = 0x70;
const unsigned long       DOM_VK_F10                    = 0x79;
const unsigned long       DOM_VK_F11                    = 0x7A;
const unsigned long       DOM_VK_F12                    = 0x7B;
const unsigned long       DOM_VK_F13                    = 0xF000;
const unsigned long       DOM_VK_F14                    = 0xF001;
const unsigned long       DOM_VK_F15                    = 0xF002;
const unsigned long       DOM_VK_F16                    = 0xF003;
const unsigned long       DOM_VK_F17                    = 0xF004;
```

```
const unsigned long       DOM_VK_F18                      = 0xF005;
const unsigned long       DOM_VK_F19                      = 0xF006;
const unsigned long       DOM_VK_F2                       = 0x71;
const unsigned long       DOM_VK_F20                      = 0xF007;
const unsigned long       DOM_VK_F21                      = 0xF008;
const unsigned long       DOM_VK_F22                      = 0xF009;
const unsigned long       DOM_VK_F23                      = 0xF00A;
const unsigned long       DOM_VK_F24                      = 0xF00B;
const unsigned long       DOM_VK_F3                       = 0x72;
const unsigned long       DOM_VK_F4                       = 0x73;
const unsigned long       DOM_VK_F5                       = 0x74;
const unsigned long       DOM_VK_F6                       = 0x75;
const unsigned long       DOM_VK_F7                       = 0x76;
const unsigned long       DOM_VK_F8                       = 0x77;
const unsigned long       DOM_VK_F9                       = 0x78;
const unsigned long       DOM_VK_FINAL                    = 0x18;
const unsigned long       DOM_VK_FIND                     = 0xFFD0;
const unsigned long       DOM_VK_FULL_WIDTH               = 0x00F3;
const unsigned long       DOM_VK_G                        = 0x47;
const unsigned long       DOM_VK_GREATER                  = 0xA0;
const unsigned long       DOM_VK_H                        = 0x48;
const unsigned long       DOM_VK_HALF_WIDTH               = 0x00F4;
const unsigned long       DOM_VK_HELP                     = 0x9C;
const unsigned long       DOM_VK_HIRAGANA                 = 0x00F2;
const unsigned long       DOM_VK_HOME                     = 0x24;
const unsigned long       DOM_VK_I                        = 0x49;
const unsigned long       DOM_VK_INSERT                   = 0x9B;
const unsigned long       DOM_VK_INVERTED_EXCLAMATION_MARK = 0x0206;
const unsigned long       DOM_VK_J                        = 0x4A;
const unsigned long       DOM_VK_JAPANESE_HIRAGANA        = 0x0104;
const unsigned long       DOM_VK_JAPANESE_KATAKANA        = 0x0103;
const unsigned long       DOM_VK_JAPANESE_ROMAN           = 0x0105;
const unsigned long       DOM_VK_K                        = 0x4B;
const unsigned long       DOM_VK_KANA                     = 0x15;
const unsigned long       DOM_VK_KANJI                    = 0x19;
const unsigned long       DOM_VK_KATAKANA                 = 0x00F1;
const unsigned long       DOM_VK_KP_DOWN                  = 0xE1;
const unsigned long       DOM_VK_KP_LEFT                  = 0xE2;
const unsigned long       DOM_VK_KP_RIGHT                 = 0xE3;
const unsigned long       DOM_VK_KP_UP                    = 0xE0;
const unsigned long       DOM_VK_L                        = 0x4C;
const unsigned long       DOM_VK_LEFT                     = 0x25;
const unsigned long       DOM_VK_LEFT_PARENTHESIS         = 0x0207;
const unsigned long       DOM_VK_LESS                     = 0x99;
const unsigned long       DOM_VK_M                        = 0x4D;
const unsigned long       DOM_VK_META                     = 0x9D;
const unsigned long       DOM_VK_MINUS                    = 0x2D;
const unsigned long       DOM_VK_MODECHANGE               = 0x1F;
const unsigned long       DOM_VK_MULTIPLY                 = 0x6A;
const unsigned long       DOM_VK_N                        = 0x4E;
const unsigned long       DOM_VK_NONCONVERT               = 0x1D;
const unsigned long       DOM_VK_NUM_LOCK                 = 0x90;
const unsigned long       DOM_VK_NUMBER_SIGN              = 0x0208;
const unsigned long       DOM_VK_NUMPAD0                  = 0x60;
const unsigned long       DOM_VK_NUMPAD1                  = 0x61;
const unsigned long       DOM_VK_NUMPAD2                  = 0x62;
const unsigned long       DOM_VK_NUMPAD3                  = 0x63;
```

```
const unsigned long       DOM_VK_NUMPAD4                = 0x64;
const unsigned long       DOM_VK_NUMPAD5                = 0x65;
const unsigned long       DOM_VK_NUMPAD6                = 0x66;
const unsigned long       DOM_VK_NUMPAD7                = 0x67;
const unsigned long       DOM_VK_NUMPAD8                = 0x68;
const unsigned long       DOM_VK_NUMPAD9                = 0x69;
const unsigned long       DOM_VK_O                      = 0x4F;
const unsigned long       DOM_VK_OPEN_BRACKET           = 0x5B;
const unsigned long       DOM_VK_P                      = 0x50;
const unsigned long       DOM_VK_PAGE_DOWN              = 0x22;
const unsigned long       DOM_VK_PAGE_UP                = 0x21;
const unsigned long       DOM_VK_PASTE                  = 0xFFCF;
const unsigned long       DOM_VK_PAUSE                  = 0x13;
const unsigned long       DOM_VK_PERIOD                 = 0x2E;
const unsigned long       DOM_VK_PLUS                   = 0x0209;
const unsigned long       DOM_VK_PREVIOUS_CANDIDATE     = 0x0101;
const unsigned long       DOM_VK_PRINTSCREEN            = 0x9A;
const unsigned long       DOM_VK_PROPS                  = 0xFFCA;
const unsigned long       DOM_VK_Q                      = 0x51;
const unsigned long       DOM_VK_QUOTE                  = 0xDE;
const unsigned long       DOM_VK_QUOTEDBL               = 0x98;
const unsigned long       DOM_VK_R                      = 0x52;
const unsigned long       DOM_VK_RIGHT                  = 0x27;
const unsigned long       DOM_VK_RIGHT_PARENTHESIS      = 0x020A;
const unsigned long       DOM_VK_ROMAN_CHARACTERS       = 0x00F5;
const unsigned long       DOM_VK_S                      = 0x53;
const unsigned long       DOM_VK_SCROLL_LOCK            = 0x91;
const unsigned long       DOM_VK_SEMICOLON              = 0x3B;
const unsigned long       DOM_VK_SEPARATER              = 0x6C;
const unsigned long       DOM_VK_SHIFT                  = 0x10;
const unsigned long       DOM_VK_SLASH                  = 0x2F;
const unsigned long       DOM_VK_SPACE                  = 0x20;
const unsigned long       DOM_VK_STOP                   = 0xFFC8;
const unsigned long       DOM_VK_SUBTRACT               = 0x6D;
const unsigned long       DOM_VK_T                      = 0x54;
const unsigned long       DOM_VK_TAB                    = 0x09;
const unsigned long       DOM_VK_U                      = 0x55;
const unsigned long       DOM_VK_UNDEFINED              = 0x0;
const unsigned long       DOM_VK_UNDERSCORE             = 0x020B;
const unsigned long       DOM_VK_UNDO                   = 0xFFCB;
const unsigned long       DOM_VK_UP                     = 0x26;
const unsigned long       DOM_VK_V                      = 0x56;
const unsigned long       DOM_VK_W                      = 0x57;
const unsigned long       DOM_VK_X                      = 0x58;
const unsigned long       DOM_VK_Y                      = 0x59;
const unsigned long       DOM_VK_Z                      = 0x5A;

readonly attribute boolean          ctrlKey;
readonly attribute boolean          shiftKey;
readonly attribute boolean          altKey;
readonly attribute boolean          metaKey;
readonly attribute unsigned long    keyCode;
readonly attribute unsigned long    charCode;
void               initKeyEvent(in DOMString typeArg,
                                in boolean canBubbleArg,
                                in boolean cancelableArg,
                                in boolean ctrlKeyArg,
```

```
                                    in boolean altKeyArg,
                                    in boolean shiftKeyArg,
                                    in boolean metaKeyArg,
                                    in unsigned long keyCodeArg,
                                    in unsigned long charCodeArg,
                                    in views::AbstractView viewArg);
};
```

Definition group *VirtualKeyCode*

An integer indicating which key was pressed.
Defined Constants

CHAR_UNDEFINED	KEY_PRESSED and KEY_RELEASED events which do not map to a valid Unicode character use this for the keyChar value.
DOM_VK_0	VK_0 thru VK_9 are the same as ASCII ’0’ thru ’9’ (0x30 - 0x39)
DOM_VK_1	
DOM_VK_2	
DOM_VK_3	
DOM_VK_4	
DOM_VK_5	
DOM_VK_6	
DOM_VK_7	
DOM_VK_8	
DOM_VK_9	
DOM_VK_A	VK_A thru VK_Z are the same as ASCII ’A’ thru ’Z’ (0x41 - 0x5A)
DOM_VK_ACCEPT	
DOM_VK_ADD	
DOM_VK_AGAIN	
DOM_VK_ALL_CANDIDATES	Constant for the All Candidates function key.

DOM_VK_ALPHANUMERIC	Constant for the Alphanumeric function key.
DOM_VK_ALT	
DOM_VK_ALT_GRAPH	Constant for the AltGraph modifier key.
DOM_VK_AMPERSAND	
DOM_VK_ASTERISK	
DOM_VK_AT	Constant for the "@" key.
DOM_VK_B	
DOM_VK_BACK_QUOTE	
DOM_VK_BACK_SLASH	
DOM_VK_BACK_SPACE	
DOM_VK_BRACELEFT	
DOM_VK_BRACERIGHT	
DOM_VK_C	
DOM_VK_CANCEL	
DOM_VK_CAPS_LOCK	
DOM_VK_CIRCUMFLEX	Constant for the "^" key.
DOM_VK_CLEAR	
DOM_VK_CLOSE_BRACKET	
DOM_VK_CODE_INPUT	Constant for the Code Input function key.
DOM_VK_COLON	Constant for the ":" key.
DOM_VK_COMMA	
DOM_VK_COMPOSE	Constant for the Compose function key.
DOM_VK_CONTROL	
DOM_VK_CONVERT	
DOM_VK_COPY	
DOM_VK_CUT	

DOM_VK_D

DOM_VK_DEAD_ABOVEDOT

DOM_VK_DEAD_ABOVERING

DOM_VK_DEAD_ACUTE

DOM_VK_DEAD_BREVE

DOM_VK_DEAD_CARON

DOM_VK_DEAD_CEDILLA

DOM_VK_DEAD_CIRCUMFLEX

DOM_VK_DEAD_DIAERESIS

DOM_VK_DEAD_DOUBLEACUTE

DOM_VK_DEAD_GRAVE

DOM_VK_DEAD_IOTA

DOM_VK_DEAD_MACRON

DOM_VK_DEAD_OGONEK

DOM_VK_DEAD_SEMIVOICED_SOUND

DOM_VK_DEAD_TILDE

DOM_VK_DEAD_VOICED_SOUND

DOM_VK_DECIMAL

DOM_VK_DELETE

DOM_VK_DIVIDE

DOM_VK_DOLLAR Constant for the "$" key.

DOM_VK_DOWN

DOM_VK_E

DOM_VK_END

DOM_VK_ENTER

DOM_VK_EQUALS

DOM_VK_ESCAPE

DOM_VK_EURO_SIGN	Constant for the Euro currency sign key.
DOM_VK_EXCLAMATION_MARK	Constant for the "!" key.
DOM_VK_F	
DOM_VK_F1	Constant for the F1 function key.
DOM_VK_F10	Constant for the F10 function key.
DOM_VK_F11	Constant for the F11 function key.
DOM_VK_F12	Constant for the F12 function key.
DOM_VK_F13	Constant for the F13 function key.
DOM_VK_F14	Constant for the F14 function key.
DOM_VK_F15	Constant for the F15 function key.
DOM_VK_F16	Constant for the F16 function key.
DOM_VK_F17	Constant for the F17 function key.
DOM_VK_F18	Constant for the F18 function key.
DOM_VK_F19	Constant for the F19 function key.
DOM_VK_F2	Constant for the F2 function key.
DOM_VK_F20	Constant for the F20 function key.
DOM_VK_F21	Constant for the F21 function key.
DOM_VK_F22	Constant for the F22 function key.

DOM_VK_F23	Constant for the F23 function key.
DOM_VK_F24	Constant for the F24 function key.
DOM_VK_F3	Constant for the F3 function key.
DOM_VK_F4	Constant for the F4 function key.
DOM_VK_F5	Constant for the F5 function key.
DOM_VK_F6	Constant for the F6 function key.
DOM_VK_F7	Constant for the F7 function key.
DOM_VK_F8	Constant for the F8 function key.
DOM_VK_F9	Constant for the F9 function key.
DOM_VK_FINAL	
DOM_VK_FIND	
DOM_VK_FULL_WIDTH	Constant for the Full-Width Characters function key.
DOM_VK_G	
DOM_VK_GREATER	
DOM_VK_H	
DOM_VK_HALF_WIDTH	Constant for the Half-Width Characters function key.
DOM_VK_HELP	
DOM_VK_HIRAGANA	Constant for the Hiragana function key.
DOM_VK_HOME	
DOM_VK_I	
DOM_VK_INSERT	

DOM_VK_INVERTED_EXCLAMATION_MARK	Constant for the inverted exclamation mark key.
DOM_VK_J	
DOM_VK_JAPANESE_HIRAGANA	Constant for the Japanese-Hiragana function key.
DOM_VK_JAPANESE_KATAKANA	Constant for the Japanese-Katakana function key.
DOM_VK_JAPANESE_ROMAN	Constant for the Japanese-Roman function key.
DOM_VK_K	
DOM_VK_KANA	
DOM_VK_KANJI	
DOM_VK_KATAKANA	Constant for the Katakana function key.
DOM_VK_KP_DOWN	for KeyPad cursor arrow keys
DOM_VK_KP_LEFT	for KeyPad cursor arrow keys
DOM_VK_KP_RIGHT	for KeyPad cursor arrow keys
DOM_VK_KP_UP	for KeyPad cursor arrow keys
DOM_VK_L	
DOM_VK_LEFT	
DOM_VK_LEFT_PARENTHESIS	Constant for the "(" key.
DOM_VK_LESS	
DOM_VK_M	
DOM_VK_META	
DOM_VK_MINUS	
DOM_VK_MODECHANGE	

DOM_VK_MULTIPLY	
DOM_VK_N	
DOM_VK_NONCONVERT	
DOM_VK_NUM_LOCK	
DOM_VK_NUMBER_SIGN	Constant for the "#" key.
DOM_VK_NUMPAD0	
DOM_VK_NUMPAD1	
DOM_VK_NUMPAD2	
DOM_VK_NUMPAD3	
DOM_VK_NUMPAD4	
DOM_VK_NUMPAD5	
DOM_VK_NUMPAD6	
DOM_VK_NUMPAD7	
DOM_VK_NUMPAD8	
DOM_VK_NUMPAD9	
DOM_VK_O	
DOM_VK_OPEN_BRACKET	
DOM_VK_P	
DOM_VK_PAGE_DOWN	
DOM_VK_PAGE_UP	
DOM_VK_PASTE	
DOM_VK_PAUSE	
DOM_VK_PERIOD	
DOM_VK_PLUS	Constant for the "+" key.
DOM_VK_PREVIOUS_CANDIDATE	Constant for the Previous Candidate function key.
DOM_VK_PRINTSCREEN	
DOM_VK_PROPS	

DOM_VK_Q	
DOM_VK_QUOTE	
DOM_VK_QUOTEDBL	
DOM_VK_R	
DOM_VK_RIGHT	
DOM_VK_RIGHT_PARENTHESIS	Constant for the ")" key.
DOM_VK_ROMAN_CHARACTERS	Constant for the Roman Characters function key.
DOM_VK_S	
DOM_VK_SCROLL_LOCK	
DOM_VK_SEMICOLON	
DOM_VK_SEPARATER	
DOM_VK_SHIFT	
DOM_VK_SLASH	
DOM_VK_SPACE	
DOM_VK_STOP	
DOM_VK_SUBTRACT	
DOM_VK_T	
DOM_VK_TAB	
DOM_VK_U	
DOM_VK_UNDEFINED	KEY_TYPED events do not have a keyCode value.
DOM_VK_UNDERSCORE	Constant for the "_" key.
DOM_VK_UNDO	
DOM_VK_UP	
DOM_VK_V	
DOM_VK_W	
DOM_VK_X	
DOM_VK_Y	

DOM_VK_Z

Attributes

`ctrlKey` of type `boolean`, readonly
: `ctrlKey` indicates whether the 'ctrl' key was depressed during the firing of the event.

`shiftKey` of type `boolean`, readonly
: `shiftKey` indicates whether the 'shift' key was depressed during the firing of the event.

`altKey` of type `boolean`, readonly
: `altKey` indicates whether the 'alt' key was depressed during the firing of the event. On some platforms this key may map to an alternative key name.

`metaKey` of type `boolean`, readonly
: `metaKey` indicates whether the 'meta' key was depressed during the firing of the event. On some platforms this key may map to an alternative key name.

`keyCode` of type `unsigned long`, readonly
: The value of `keyCode` holds the virtual key code value of the key which was depressed if the event is a key event. Otherwise, the value is zero.

`charCode` of type `unsigned long`, readonly
: `charCode` holds the value of the Unicode character associated with the depressed key if the event is a key event. Otherwise, the value is zero.

Methods

`initKeyEvent`
: **Parameters**

`DOMString` [p.19]	`typeArg`	Specifies the event type.
`boolean`	`canBubbleArg`	Specifies whether or not the event can bubble.
`boolean`	`cancelableArg`	Specifies whether or not the event's default action can be prevent.
`boolean`	`ctrlKeyArg`	Specifies whether or not control key was depressed during the `Event` [p.215] .
`boolean`	`altKeyArg`	Specifies whether or not alt key was depressed during the `Event` [p.215] .
`boolean`	`shiftKeyArg`	Specifies whether or not shift key was depressed during the `Event` [p.215] .
`boolean`	`metaKeyArg`	Specifies whether or not meta key was depressed during the `Event` [p.215] .
`unsigned long`	`keyCodeArg`	Specifies the `Event` [p.215] 's `keyCode`
`unsigned long`	`charCodeArg`	Specifies the `Event` [p.215] 's `charCode`
`views::AbstractView`	`viewArg`	Specifies the `Event` [p.215] 's `AbstractView` [p.117] .

No Return Value
No Exceptions

The different types of Key events that can occur are:

keypress
The keypress event occurs when a key is pressed. If the key remains depressed, multiple keypresses may be generated. This event maps not to the physical depression of the key but is instead the result of that action, often being the insertion of a character.

- Bubbles: Yes
- Cancelable: Yes
- Context Info: keyCode, charCode

keydown

The keydown event occurs when a key is pressed down.

- Bubbles: Yes
- Cancelable: Yes
- Context Info: keyCode, charCode

keyup

The keyup event occurs when a key is released.

- Bubbles: Yes
- Cancelable: Yes
- Context Info: keyCode, charCode

6.6.4. Mutation event types

The mutation event set is designed to allow notification of any changes to the structure of a document, including attr and text modifications. It may be noted that none of the mutation events listed are designated as cancelable. This stems from the fact that it is very difficult to make use of existing DOM interfaces which cause document modifications if any change to the document might or might not take place due to cancelation of the related event. Although this is still a desired capability, it was decided that it would be better left until the addition of transactions into the DOM.

A DOM consumer can use the `hasFeature` of the `DOMImplementation` [p.22] interface to determine whether the mutation event set has been implemented by a DOM implementation. The feature string for this event set is "MutationEvents".

Interface *MutationEvent* (introduced in **DOM Level 2**)

The `MutationEvent` interface provides specific contextual information associated with Mutation events.

IDL Definition

```
// Introduced in DOM Level 2:
interface MutationEvent : Event {
  readonly attribute Node             relatedNode;
  readonly attribute DOMString        prevValue;
  readonly attribute DOMString        newValue;
  readonly attribute DOMString        attrName;
  void               initMutationEvent(in DOMString typeArg,
                                       in boolean canBubbleArg,
                                       in boolean cancelableArg,
                                       in Node relatedNodeArg,
                                       in DOMString prevValueArg,
                                       in DOMString newValueArg,
                                       in DOMString attrNameArg);
};
```

Attributes

`relatedNode` of type `Node` [p.34] , readonly
: `relatedNode` is used to identify a secondary node related to a mutation event. For example, if a mutation event is dispatched to a node indicating that its parent has changed, the `relatedNode` is the changed parent. If an event is instead dispatch to a subtree indicating a node was changed within it, the `relatedNode` is the changed node.

`prevValue` of type `DOMString` [p.19] , readonly
: `prevValue` indicates the previous value of text nodes and attributes in attrModified and charDataModified events.

`newValue` of type `DOMString` [p.19] , readonly
: `newValue` indicates the new value of text nodes and attributes in attrModified and charDataModified events.

`attrName` of type `DOMString` [p.19] , readonly
: `attrName` indicates the changed attr in the attrModified event.

Methods

`initMutationEvent`

Parameters

`DOMString` [p.19]	`typeArg`	Specifies the event type.
`boolean`	`canBubbleArg`	Specifies whether or not the event can bubble.
`boolean`	`cancelableArg`	Specifies whether or not the event's default action can be prevent.
`Node` [p.34]	`relatedNodeArg`	Specifies the `Event` [p.215] 's related Node
`DOMString`	`prevValueArg`	Specifies the `Event` [p.215] 's `prevValue` property
`DOMString`	`newValueArg`	Specifies the `Event` [p.215] 's `newValue` property
`DOMString`	`attrNameArg`	Specifies the `Event` [p.215] 's `attrName` property

No Return Value
No Exceptions

The different types of Mutation events that can occur are:

DOMSubtreeModified
: This is a general event for notification of all changes to the document. It can be used instead of the more specific events listed below. Also, the requirement for some sort of batching of mutation events may be accomplished through this event. The target of this event is the lowest common parent of the changes which have taken place. This event is dispatched after any other events caused by the mutation have fired.
  - Bubbles: Yes
  - Cancelable: No
  - Context Info: None

DOMNodeInserted
: Fired when a node has been added as a child of another node. This event is dispatched after the insertion has taken place. The target of this event is the node being inserted.
  - Bubbles: Yes
  - Cancelable: No
  - Context Info: relatedNode holds the parent node

DOMNodeRemoved
: Fired when a node is being removed from another node. This event is dispatched before the node is removed from the tree. The target of this event is the node being removed.
  - Bubbles: Yes
  - Cancelable: No
  - Context Info: relatedNode holds the parent node

DOMNodeRemovedFromDocument
: Fired when a node is being removed from a document, either through direct removal of the Node or removal of a subtree in which it is contained. This event is dispatched before the removal takes place. The target of this event is the node being removed. If the Node is being directly removed the nodeRemoved event will fire before the nodeRemovedFromDocument event.
  - Bubbles: No
  - Cancelable: No
  - Context Info: None

DOMNodeInsertedIntoDocument
: Fired when a node is being inserted into a document, either through direct insertion of the Node or insertion of a subtree in which it is contained. This event is dispatched after the insertion has taken place. The target of this event is the node being inserted. If the Node is being directly inserted the nodeInserted event will fire before the nodeInsertedIntoDocument event.
  - Bubbles: No
  - Cancelable: No
  - Context Info: None

DOMAttrModified
: Fired after an `Attr` [p.50] has been modified on a node. The target of this event is the node whose `Attr` changed.
  - Bubbles: Yes
  - Cancelable: No
  - Context Info: attrName, prevValue, newValue

DOMCharacterDataModified
Fired after CharacterData within a node has been modified but the node itself has not been inserted or deleted. The target of this event is the CharacterData node.
- Bubbles: Yes
- Cancelable: No
- Context Info: prevValue, newValue

6.6.5. HTML event types

The HTML event set is composed of events listed in HTML 4.0 and additional events which are supported in *DOM Level 0* [p.434] browsers.

A DOM consumer can use the `hasFeature` of the `DOMImplementation` [p.22] interface to determine whether the HTML event set has been implemented by a DOM implementation. The feature string for this event set is "HTMLEvents".

The HTML events use the base DOM Event interface to pass contextual information.

The different types of such events that can occur are:

load
The load event occurs when the DOM implementation finishes loading all content within a document, all frames within a FRAMESET, or an OBJECT element.
- Bubbles: No
- Cancelable: No
- Context Info: None

unload
The unload event occurs when the DOM implementation removes a document from a window or frame. This event is valid for BODY and FRAMESET elements.
- Bubbles: No
- Cancelable: No
- Context Info: None

abort
The abort event occurs when page loading is stopped before an image has been allowed to completely load. This event applies to OBJECT elements.
- Bubbles: Yes
- Cancelable: No
- Context Info: None

error
The error event occurs when an image does not load properly or when an error occurs during script execution. This event is valid for OBJECT elements, BODY elements, and FRAMESET element.
- Bubbles: Yes
- Cancelable: No
- Context Info: None

select

The select event occurs when a user selects some text in a text field. This event is valid for INPUT and TEXTAREA elements.

- Bubbles: Yes
- Cancelable: No
- Context Info: None

change

The change event occurs when a control loses the input focus and its value has been modified since gaining focus. This event is valid for INPUT, SELECT, and TEXTAREA. element.

- Bubbles: Yes
- Cancelable: No
- Context Info: None

submit

The submit event occurs when a form is submitted. This event only applies to the FORM element.

- Bubbles: Yes
- Cancelable: Yes
- Context Info: None

reset

The reset event occurs when a form is reset. This event only applies to the FORM element.

- Bubbles: Yes
- Cancelable: No
- Context Info: None

focus

The focus event occurs when an element receives focus either via a pointing device or by tabbing navigation. This event is valid for the following elements: LABEL, INPUT, SELECT, TEXTAREA, and BUTTON.

- Bubbles: No
- Cancelable: No
- Context Info: None

blur

The blur event occurs when an element loses focus either by the pointing device or by tabbing navigation. This event is valid for the following elements: LABEL, INPUT, SELECT, TEXTAREA, and BUTTON.

- Bubbles: No
- Cancelable: No
- Context Info: None

7. Document Object Model Traversal

Editors
Mike Champion, Software AG
Joe Kesselman, IBM
Jonathan Robie, Software AG

7.1. Overview

The DOM Level 2 TreeWalker, NodeIterator, and, Filter interfaces provide simple and efficient traversal for document nodes. The TreeWalker, NodeIterator, and Filter interfaces are optional. A DOM application can use the `hasFeature` method of the `DOMImplementation` [p.22] interface to determine whether they are supported or not. The feature string for all the interfaces listed in this section is "Traversal". Iterators and TreeWalkers are two different ways of representing the nodes of a document subtree and a position within that collection. An Iterator flattens a subtree into an ordered list of document nodes, presented in document order. Because this is a flat list, presented without respect to hierarchy, Iterators have methods to move forward and backward, but not to move up and down. A TreeWalker maintains the hierarchical relationships of the subtree, allowing navigation of this hierarchy.

Iterators and TreeWalkers each present a view of a document subtree that may not contain all nodes found in the subtree. In this specification, we refer to this as the *logical view* to distinguish it from the *physical view*, which corresponds to the document subtree per se. When an Iterator or TreeWalker is created, it may be associated with a Filter, which examines a node and determines whether it should be appear in the logical view. In addition, flags may be used to specify which node types should occur in the logical view. Iterators and TreeWalkers are dynamic - the logical view changes to reflect changes made to the underlying document.

7.1.1. Iterators

An Iterator allows a list of nodes to be returned sequentially. In the current DOM interfaces, this list will always consist of the nodes of a subtree, presented in document order. When an Iterator is first created, calling nextNode() returns the first node in the logical view of the subtree; in most cases, this is the root of the subtree. When no more nodes are present, nextNode() returns `null`.

Iterators are created using the createNodeIterator method found in the `DocumentTraversal` [p.261] interface. When an Iterator is created, flags can be used to determine which node types will be "visible" and which nodes will be "invisible" while traversing the tree; these flags can be combined using the OR operator. Nodes that are "invisible" are skipped over by the Iterator as though they did not exist. The following code creates an Iterator, then calls a function to print the name of each element:

```
NodeIterator iter=document.createNodeIterator(root, SHOW_ELEMENT, null);

while (Node n = iter.nextNode())
printMe(n);
```

7.1.1.1. Moving Forward and Backward

Iterators present nodes as an ordered list, and move forward and backward within this list. The Iterator's position is always between two nodes, before the first node, or after the last node. When an Iterator is first created, the position is set before the first item. The following diagram shows the list view that an Iterator might provide for a particular subtree, with the position indicated by an asterisk '*' :

```
* A B C D E F G H I
```

Each call to nextNode() returns the next node and advances the position. For instance, if we start with the above position, the first call to nextNode() returns "A" and advances the Iterator:

```
[A] * B C D E F G H I
```

An iterator uses the node last returned to maintain its position. This node is known as the *reference node*. In these diagrams, we use square brackets to indicate the reference node.

A call to previousNode() returns the previous node and moves the position backward. For instance, if we start with the Iterator between "A" and "B", it would return "A" and move to the position shown below:

```
* [A] B C D E F G H I
```

If nextNode() is called at the end of a list, or previousNode() is called at the beginning of a list, it returns `null` and does not change the position of the Iterator. When an Iterator is first created, the reference node is the first node:

```
* [A] B C D E F G H I
```

7.1.1.2. Robustness

An Iterator may be active while the data structure it navigates is being edited, so an Iterator must behave gracefully in the face of change. Additions and removals in the underlying data structure do not invalidate an Iterator; in fact, an Iterator is never invalidated. To make this possible, the Iterator uses the reference node to maintain its position. The state of an Iterator also depends on whether the Iterator is positioned before or after the reference node. If the reference node is removed, another node becomes the reference node.

If changes to the iterated list do not remove the reference node, they do not affect the state of the Iterator. For instance, the Iterator's state is not affected by inserting new nodes in the vicinity of the iterator or removing nodes other than the reference node. Suppose we start from the following position:

```
A B C [D] * E F G H I
```

Now let's remove "E". The resulting state is:

```
A B C [D] * F G H I
```

If a new node is inserted, the iterator stays close to the reference node, so if a node is inserted between "D" and "F", it will occur between the Iterator and "F":

```
A B C [D] * X F G H I
```

Moving a node is equivalent to a removal followed by an insertion. If we move "I" to the position before "X" the result is:

```
A B C [D] * I X F G H
```

If the reference node is removed, a different node is selected as the reference node. If the reference node is before the Iterator, which is usually the case after nextNode() has been called, the nearest node before the Iterator is chosen as the new reference node. Suppose we remove the "D" node, starting from the following state:

```
A B C [D] * F G H I
```

The "C" node becomes the new reference node, since it is the nearest node to the Iterator that is before the Iterator:

```
A B [C] * F G H I
```

If the reference node is after the Iterator, which is usually the case after previousNode() has been called, the nearest node after the Iterator is chosen as the new reference node. Suppose we remove "E", starting from the following state:

```
A B C D * [E] F G H I
```

The "F" node becomes the new reference node, since it is the nearest node to the Iterator that is after the Iterator:

```
A B C D * [F] G H I
```

Moving a node is equivalent to a removal followed by an insertion. Suppose we wish to move the "D" node to the end of the list, starting from the following state:

```
A B C [D] * F G H I C
```

The resulting state is as follows:

```
A B [C] * F G H I D
```

One special case arises when the reference node is the last node in the list and the reference node is removed. Suppose we remove node "C", starting from the following state:

```
A B * [C]
```

According to the rules we have given, the new reference node should be the nearest node after the Iterator, but there are no further nodes after "C". If there is no node in the original direction of the reference node, the nearest node in the opposite direction is selected as the reference node:

```
A [B] *
```

If the Iterator is part of a block of nodes that is removed, the above rules clearly indicate what is to be done. For instance, suppose "C" is the parent node of "D", "E", and "F", and we remove "C", starting with the following state:

```
A B C [D] * E F G H I D
```

The resulting state is as follows:

```
A [B] * G H I D
```

7.1.1.3. Visibility of Nodes

The underlying data structure that is being iterated may contain nodes that are not part of the logical view, and therefore will not be returned by the Iterator. If invisible nodes are present, nextNode() returns the next visible node, skipping over nodes that are to be excluded because of the value of the whatToShow flag. If a filter is present, it is applied before returning a node; if the filter rejects a node, the process is repeated until a node is accepted by the filter. That node is returned. If no visible nodes are encountered, a null is returned and the Iterator is positioned at the end of the list. In this case, the reference node is the last node in the list, whether or not it is visible. The same approach is taken, in the opposite direction, for previousNode().

In the following examples, we will use lower case letters to represent nodes that are in the data structure, but which are not in the logical view. For instance, consider the following list:

```
A [B] * c d E F G
```

A call to nextNode() returns E and advances to the following position:

```
A B c d [E] * F G
```

Nodes that are not visible may nevertheless be used as reference nodes if a reference node is removed. Suppose node "E" is removed, started from the state given above. The resulting state is:

```
A B c [d] * F G
```

Suppose a new node "X", which is visible, is inserted before "d". The resulting state is:

```
A B c X [d] * F G
```

Note that a call to previousNode() now returns node X. It is important not to skip over invisible nodes when the reference node is removed, because there are cases, like the one just given above, where the wrong results will be returned. When "E" was removed, if the new reference node had been "B" rather than "d", calling previousNode() would not return "X".

7.1.2. Filters

Filters allow the user to create objects that "filter out" nodes. Each filter contains a user-written function that looks at a node and determines whether or not it should be filtered out. To use a filter, you create an Iterator or a TreeWalker that uses the filter. The Iterator or TreeWalker applies the filter to each node, and if the filter rejects the node, the Iterator or TreeWalker skips over the node as though it were not present in

the document. Filters need not know how to navigate the structure that contains the nodes on which they operate.

7.1.2.1. Using Filters

A Filter contains one method named acceptNode(), which allows an Iterator or TreeWalker to pass a Node to a filter and ask whether it should be present in the logical view. The acceptNode() function returns one of three values to state how the Node should be treated. If acceptNode() returns FILTER_ACCEPT, the Node will be present in the logical view; if it returns FILTER_SKIP, the Node will not be present in the logical view, but the children of the Node may; if it returns FILTER_REJECT, neither the Node nor its descendants will be present in the logical view. Since Iterators present nodes as an ordered list, without hierarchy, FILTER_REJECT and FILTER_SKIP are synonyms for Iterators, skipping only the single current node.

Consider a filter that accepts the named anchors in an HTML document. In HTML, an HREF can refer to any A element that has a NAME attribute. Here is a filter in Java that looks at a node and determines whether it is a named anchor:

```
class NamedAnchorFilter implements NodeFilter
{
short acceptNode(Node n) {
if (n instanceof Element) {
Element e = (element)n;
if (! e.getNodeName().equals("A"))
return FILTER_SKIP;
if (e.getAttributeNode("NAME") != null) {
return FILTER_ACCEPT;
}
}
return FILTER_SKIP;
}
}
```

If the above Filter were to be used with only Iterators, it could have used FILTER_REJECT wherever FILTER_SKIP is used, and the behavior would not change. For TreeWalker, though, FILTER_REJECT would reject the children of any element that is not a named anchor, and since named anchors are always contained within other elements, this would have meant that no named anchors would be found. FILTER_SKIP rejects the given node, but continues to examine the children; therefore, the above filter will work with either an Iterator or a TreeWalker.

To use this filter, the user would create an instance of the filter and create an Iterator using it:

```
NamedAnchorFilter myFilter = new NamedAnchorFilter();
NodeIterator iter=(DocumentTraversal)document.creatNodeIterator(node, SHOW_ELEMENT, myFilter);
```

7.1.2.2. Filters and Exceptions

When writing a Filter, users should avoid writing code that can throw an exception. However, because an implementation can not prevent users from doing so, it is important that the behavior of filters that throw an exception be well-defined. A TreeWalker or Iterator does not catch or alter an exception thrown by a filter, but lets it propagate up to the user's code. The following functions may invoke a Filter, and may therefore propagate an exception if one is thrown by a Filter:

1. NodeIterator.nextNode()
2. NodeIterator.previousNode()
3. TreeWalker.firstChild()
4. TreeWalker.lastChild()
5. TreeWalker.nextSibling()
6. TreeWalker.previousSibling()
7. TreeWalker.nextNode()
8. TreeWalker.previousNode()
9. TreeWalker.parentNode()

7.1.2.3. Filters and Document Mutation

Well-designed Filters do not modify the underlying document structure, but a Filter implementation can not prevent a user from writing code that does modify the document structure. Filters do not provide any special processing to handle this case. For instance, if a Filter removes a node from a document, it can still accept the node, which means that the node may be returned by the Iterator or TreeWalker even though it is no longer in the document. In general, this may lead to inconsistent, confusing results, so we encourage users to write Filters that make no changes to document structures.

7.1.2.4. Filters and whatToShow flags

Iterator and TreeWalker apply whatToShow flags before applying Filters. If a node is rejected by the active whatToShow flags, a Filter will not be called to evaluate that node. When a node is rejected by the active whatToShow flags, children of that node will still be considered, and Filters may be called to evaluate them.

7.1.3. TreeWalker

The `TreeWalker` [p.256] interface provides many of the same benefits as the Iterator interface. The main difference between these two interfaces is that the `TreeWalker` presents a tree-oriented view of the nodes in a subtree, and an Iterator presents a list-oriented view. In other words, an Iterator allows you to move forward or back, but a `TreeWalker` allows you to move to the parent of a node, to one of its children, or to a sibling.

Using a `TreeWalker` [p.256] is quite similar to navigation using the Node directly, and the navigation methods for the two interfaces are analogous. For instance, here is a function that walks over a tree of nodes in document order, taking separate actions when first entering a node and after processing any children:

```
processMe(Node n) {
        nodeStartActions(n);
        for (Node child=n.firstChild(); child != null; child=child.nextSibling())
        processMe(child);
        }
        nodeEndActions(n);
        }
```

Doing the same thing using a `TreeWalker` [p.256] is quite similar. There is one difference: since navigation on the `TreeWalker` changes the current position, the position at the end of the function has changed. A read/write attribute named `currentNode` allows the current node for a `TreeWalker` to be set. We will use this to ensure that the position of the `TreeWalker` is restored when this function is completed:

```
processMe(TreeWalker tw) {
        Node n = tw.getCurrentNode();
        nodeStartActions(tw);
        for (Node child=tw.firstChild(); child!=null; child=tw.nextSibling()) {
        processMe(tw);
        }

        tw.setCurrentNode(n);
        nodeEndActions(tw);
        }
```

The advantage of using a `TreeWalker` [p.256] instead of direct Node navigation is that the `TreeWalker` allows the user to choose an appropriate view of the tree. Flags may be used to show or hide comments or processing instructions, entities may be expanded or left as entity references. In addition, Filters may be used to present a custom view of the tree. Suppose a program needs a view of a document that shows which tables occur in each chapter, listed by chapter. In this view, only the chapter elements and the tables that they contain are seen. The first step is to write an appropriate filter:

```
class TablesInChapters implements NodeFilter {

        short acceptNode(Node n) {
        if (n instanceof Element) {

        if (n.getNodeName().equals("CHAPTER"))
        return FILTER_ACCEPT;

        if (n.getNodeName().equals("TABLE"))
        return FILTER_ACCEPT;

        if (n.getNodeName().equals("SECT1")
        || n.getNodeName().equals("SECT2")
        || n.getNodeName().equals("SECT3")
        || n.getNodeName().equals("SECT4")
        || n.getNodeName().equals("SECT5")
        || n.getNodeName().equals("SECT6")
        || n.getNodeName().equals("SECT7"))
        return FILTER_SKIP;

        }
```

```
        return FILTER_REJECT;
        }
        }
```

Now the program can create an instance of this Filter, create a `TreeWalker` [p.256] that uses it, and pass this `TreeWalker` to our ProcessMe() function:

```
TablesInChapters tablesInChapters  = new TablesInChapters();
        TreeWalker tw  = someDocTraversal.createTreeWalker(root, SHOW_ELEMENT, tablesInChapters);
        processMe(tw);
```

Without making any changes to the above ProcessMe() function, it now processes only the CHAPTER and TABLE elements. The programmer can write other filters or set other flags to choose different sets of nodes; if functions use `TreeWalker` [p.256] to navigate, they will support any view of the document defined with a `TreeWalker`.

7.2. Formal Interface Definition

Interface *NodeIterator* (introduced in **DOM Level 2**)

NodeIterators are used to step through a set of nodes, e.g. the set of nodes in a NodeList, the document subtree governed by a particular node, the results of a query, or any other set of nodes. The set of nodes to be iterated is determined by the implementation of the NodeIterator. DOM Level 2 specifies a single NodeIterator implementation for document-order traversal of a document subtree. Instances of these iterators are created by calling DocumentTraversal.createNodeIterator().

Any Iterator that returns nodes may implement the `NodeIterator` interface. Users and vendor libraries may also choose to create Iterators that implement the `NodeIterator` interface.

IDL Definition

```
// Introduced in DOM Level 2:
interface NodeIterator {
  readonly attribute long             whatToShow;
  // Constants for whatToShow
  const unsigned long       SHOW_ALL                      = 0x0000FFFF;
  const unsigned long       SHOW_ELEMENT                  = 0x00000001;
  const unsigned long       SHOW_ATTRIBUTE                = 0x00000002;
  const unsigned long       SHOW_TEXT                     = 0x00000004;
  const unsigned long       SHOW_CDATA_SECTION            = 0x00000008;
  const unsigned long       SHOW_ENTITY_REFERENCE         = 0x00000010;
  const unsigned long       SHOW_ENTITY                   = 0x00000020;
  const unsigned long       SHOW_PROCESSING_INSTRUCTION   = 0x00000040;
  const unsigned long       SHOW_COMMENT                  = 0x00000080;
  const unsigned long       SHOW_DOCUMENT                 = 0x00000100;
  const unsigned long       SHOW_DOCUMENT_TYPE            = 0x00000200;
  const unsigned long       SHOW_DOCUMENT_FRAGMENT        = 0x00000400;
  const unsigned long       SHOW_NOTATION                 = 0x00000800;

  readonly attribute NodeFilter       filter;
```

```
  readonly attribute boolean          expandEntityReferences;
  Node                nextNode();
  Node                previousNode();
};
```

Attributes

`whatToShow` of type `long`, readonly

This attribute determines which node types are presented via the Iterator.

Definition group *Constants for whatToShow*

These are the available values for the whatToShow parameter. They are the same as the set of possible types for Node, and their values are derived by using a bit position corresponding to the value of NodeType for the equivalent node type.

Defined Constants

SHOW_ALL	Show all nodes.
SHOW_ELEMENT	Show element nodes.
SHOW_ATTRIBUTE	Show attribute nodes. This is meaningful only when creating an Iterator with an attribute node as its root; in this case, it means that the attribute node will appear in the first position of the iteration. Since attributes are not part of the document tree, they do not appear when iterating over the document tree.
SHOW_TEXT	Show text nodes.
SHOW_CDATA_SECTION	Show CDATASection nodes.
SHOW_ENTITY_REFERENCE	Show Entity Reference nodes.
SHOW_ENTITY	Show Entity nodes. This is meaningful only when creating an Iterator with an Entity node as its root; in this case, it means that the Entity node will appear in the first position of the iteration. Since entities are not part of the document tree, they do not appear when iterating over the document tree.
SHOW_PROCESSING_INSTRUCTION	Show ProcessingInstruction nodes.

SHOW_COMMENT	Show Comment nodes.
SHOW_DOCUMENT	Show Document nodes.
SHOW_DOCUMENT_TYPE	Show DocumentType nodes.
SHOW_DOCUMENT_FRAGMENT	Show DocumentFragment nodes.
SHOW_NOTATION	Show Notation nodes. This is meaningful only when creating an Iterator with a Notation node as its root; in this case, it means that the Notation node will appear in the first position of the iteration. Since notations are not part of the document tree, they do not appear when iterating over the document tree.

`filter` of type `NodeFilter` [p.255] , readonly
The filter used to screen nodes.

`expandEntityReferences` of type `boolean`, readonly
The value of this flag determines whether entity reference nodes are expanded. To produce a view of the document that has entity references expanded and does not expose the entity reference node itself, use the whatToShow flags to hide the entity reference node and set expandEntityReferences to true when creating the iterator. To produce a view of the document that has entity reference nodes but no entity expansion, use the whatToShow flags to show the entity reference node and set expandEntityReferences to true.

Methods

`nextNode`
Returns the next node in the set and advances the position of the Iterator in the set. After a NodeIterator is created, the first call to nextNode() returns the first node in the set.
Return Value

`Node` [p.34]	The next `Node` in the set being iterated over, or `null` if there are no more members in that set.

No Parameters
No Exceptions

`previousNode`
Returns the previous node in the set and moves the position of the Iterator backwards in the set.
Return Value

`Node` [p.34]	The previous `Node` in the set being iterated over, or `null` if there are no more members in that set.

No Parameters
No Exceptions

Interface *NodeFilter* (introduced in **DOM Level 2**)

Filters are objects that know how to "filter out" nodes. If an Iterator or `TreeWalker` [p.256] is given a filter, before it returns the next node, it applies the filter. If the filter says to accept the node, the Iterator returns it; otherwise, the Iterator looks for the next node and pretends that the node that was rejected was not there.

The DOM does not provide any filters. Filter is just an interface that users can implement to provide their own filters.

Filters do not need to know how to iterate, nor do they need to know anything about the data structure that is being iterated. This makes it very easy to write filters, since the only thing they have to know how to do is evaluate a single node. One filter may be used with a number of different kinds of Iterators, encouraging code reuse.

IDL Definition

```
// Introduced in DOM Level 2:
interface NodeFilter {
  // Constants returned by acceptNode
  const short               FILTER_ACCEPT                = 1;
  const short               FILTER_REJECT                = 2;
  const short               FILTER_SKIP                  = 3;

  short              acceptNode(in Node n);
};
```

Definition group *Constants returned by acceptNode*

The following constants are returned by the acceptNode() method:

Defined Constants

FILTER_ACCEPT	Accept the node. Navigation methods defined for Iterator or `TreeWalker` [p.256] will return this node.
FILTER_REJECT	Reject the node. Navigation methods defined for Iterator or `TreeWalker` [p.256] will not return this node. For `TreeWalker`, the children of this node will also be rejected. Iterators treat this as a synonym for FILTER_SKIP.
FILTER_SKIP	Reject the node. Navigation methods defined for Iterator or `TreeWalker` [p.256] will not return this node. For both Iterator and Treewalker, the children of this node will still be considered.

Methods

`acceptNode`

Test whether a specified node is visible in the logical view of a TreeWalker or NodeIterator. This function will be called by the implementation of TreeWalker and NodeIterator; it is not intended to be called directly from user code.

Parameters

`Node` [p.34]	`n`	The node to check to see if it passes the filter or not.

Return Value

`short`	a constant to determine whether the node is accepted, rejected, or skipped, as defined above [p.255] .

No Exceptions

Interface *TreeWalker* (introduced in **DOM Level 2**)

`TreeWalker` objects are used to navigate a document tree or subtree using the view of the document defined by its `whatToShow` flags and any filters that are defined for the `TreeWalker`. Any function which performs navigation using a `TreeWalker` will automatically support any view defined by a `TreeWalker`.

Omitting nodes from the logical view of a subtree can result in a structure that is substantially different from the same subtree in the complete, unfiltered document. Nodes that are siblings in the TreeWalker view may be children of different, widely separated nodes in the original view. For instance, consider a Filter that skips all nodes except for Text nodes and the root node of a document. In the logical view that results, all text nodes will be siblings and appear as direct children of the root node, no matter how deeply nested the structure of the original document.

IDL Definition

```
// Introduced in DOM Level 2:
interface TreeWalker {
  readonly attribute long            whatToShow;
  // Constants for whatToShow
  const unsigned long       SHOW_ALL                      = 0x0000FFFF;
  const unsigned long       SHOW_ELEMENT                  = 0x00000001;
  const unsigned long       SHOW_ATTRIBUTE                = 0x00000002;
  const unsigned long       SHOW_TEXT                     = 0x00000004;
  const unsigned long       SHOW_CDATA_SECTION            = 0x00000008;
  const unsigned long       SHOW_ENTITY_REFERENCE         = 0x00000010;
  const unsigned long       SHOW_ENTITY                   = 0x00000020;
  const unsigned long       SHOW_PROCESSING_INSTRUCTION   = 0x00000040;
  const unsigned long       SHOW_COMMENT                  = 0x00000080;
  const unsigned long       SHOW_DOCUMENT                 = 0x00000100;
  const unsigned long       SHOW_DOCUMENT_TYPE            = 0x00000200;
  const unsigned long       SHOW_DOCUMENT_FRAGMENT        = 0x00000400;
  const unsigned long       SHOW_NOTATION                 = 0x00000800;
```

```
  readonly attribute NodeFilter       filter;
  readonly attribute boolean          expandEntityReferences;
           attribute Node             currentNode;
  Node               parentNode();
  Node               firstChild();
  Node               lastChild();
  Node               previousSibling();
  Node               nextSibling();
  Node               previousNode();
  Node               nextNode();
};
```

Attributes

`whatToShow` of type `long`, readonly

This attribute determines which node types are presented via the TreeWalker.

Definition group *Constants for whatToShow*

These are the available values for the `whatToShow` parameter. They are the same as the set of possible types for `Node` [p.34] , and their values are derived by using a bit position corresponding to the value of NodeType for the equivalent node type.

Defined Constants

SHOW_ALL	Show all nodes.
SHOW_ELEMENT	Show `Element` [p.52] nodes.
SHOW_ATTRIBUTE	Show `Attribute` nodes. This is meaningful only when creating a `TreeWalker` with an attribute node as its root; in this case, it means that the attribute node will appear as the root node of the filtered tree. Since attributes are not part of the document tree, they do not appear when iterating over the document tree.
SHOW_TEXT	Show `Text` [p.59] nodes.
SHOW_CDATA_SECTION	Show `CDATASection` [p.61] nodes.
SHOW_ENTITY_REFERENCE	Show Entity Reference nodes.

SHOW_ENTITY	Show Entity nodes. This is meaningful only when creating an Iterator with an Entity node as its root; in this case, it means that the Entity node will appear in the first position of the iteration. Since entities are not part of the document tree, they do not appear when iterating over the document tree.
SHOW_PROCESSING_INSTRUCTION	Show `ProcessingInstruction` [p.64] nodes.
SHOW_COMMENT	Show `Comment` [p.60] nodes.
SHOW_DOCUMENT	Show `Document` [p.25] nodes.
SHOW_DOCUMENT_TYPE	Show DocumentType nodes.
SHOW_DOCUMENT_FRAGMENT	Show `DocumentFragment` [p.24] nodes.
SHOW_NOTATION	Show Notation nodes. This is meaningful only when creating an Iterator with a Notation node as its root; in this case, it means that the Notation node will appear in the first position of the iteration. Since notations are not part of the document tree, they do not appear when iterating over the document tree.

`filter` of type `NodeFilter` [p.255] , readonly
The filter used to screen nodes.

`expandEntityReferences` of type `boolean`, readonly
The value of this flag determines whether entity reference nodes are expanded. To produce a view of the document that has entity references expanded and does not expose the entity reference node itself, use the whatToShow flags to hide the entity reference node and set expandEntityReferences to true when creating the iterator. To produce a view of the document that has entity reference nodes but no entity expansion, use the whatToShow flags to show the entity reference node and set expandEntityReferences to true.

`currentNode` of type `Node` [p.34]
The current node.
The value must not be null. Attempting to set it to null will raise a NOT_SUPPORTED_ERR exception. When setting a node, the whatToShow flags and any Filter associated with the TreeWalker are not checked. The currentNode may be set to any Node of any type.

Methods

`parentNode`
Moves to and returns the parent node of the current node. If there is no parent node, or if the current node is the root node from which this TreeWalker was created, retains the current position and returns null.
Return Value

`Node` [p.34]	The new parent node, or null if the current node has no parent in the TreeWalker's logical view.

No Parameters
No Exceptions

`firstChild`
Moves the `TreeWalker` to the first child of the current node, and returns the new node. If the current node has no children, returns `null`, and retains the current node.
Return Value

`Node` [p.34]	The new node, or `null` if the current node has no children.

No Parameters
No Exceptions

`lastChild`
Moves the `TreeWalker` to the last child of the current node, and returns the new node. If the current node has no children, returns `null`, and retains the current node.
Return Value

`Node` [p.34]	The new node, or `null` if the current node has no children.

No Parameters
No Exceptions

`previousSibling`
Moves the `TreeWalker` to the previous sibling of the current node, and returns the new node. If the current node has no previous sibling, returns `null`, and retains the current node.
Return Value

`Node` [p.34] The new node, or `null` if the current node has no previous sibling.

No Parameters
No Exceptions

`nextSibling`
Moves the `TreeWalker` to the next sibling of the current node, and returns the new node. If the current node has no next sibling, returns `null`, and retains the current node.
Return Value

`Node` [p.34] The new node, or `null` if the current node has no next sibling.

No Parameters
No Exceptions

`previousNode`
Moves the `TreeWalker` to the previous node in document order relative to the current node, and returns the new node. If the current node has no previous node, returns `null`, and retains the current node.
Return Value

`Node` [p.34] The new node, or `null` if the current node has no previous node.

No Parameters
No Exceptions

`nextNode`
Moves the `TreeWalker` to the next node in document order relative to the current node, and returns the new node. If the current node has no next node, returns `null`, and retains the current node.
Return Value

`Node` [p.34] The new node, or `null` if the current node has no next node.

No Parameters
No Exceptions

Interface *DocumentTraversal* (introduced in **DOM Level 2**)

`DocumentTraversal` contains methods that creates Iterators to traverse a node and its children in document order (depth first, pre-order traversal, which is equivalent to the order in which the start tags occur in the text representation of the document).
IDL Definition

```
// Introduced in DOM Level 2:
interface DocumentTraversal {
  NodeIterator       createNodeIterator(in Node root,
                                        in long whatToShow,
                                        in NodeFilter filter,
                                        in boolean entityReferenceExpansion);
  TreeWalker         createTreeWalker(in Node root,
                                      in long whatToShow,
                                      in NodeFilter filter,
                                      in boolean entityReferenceExpansion)
                                        raises(DOMException);
};
```

Methods

`createNodeIterator`

Parameters

`Node` [p.34]	`root`	The node which will be iterated together with its children. The iterator is initially positioned just before this node. The whatToShow flags and the filter, if any, are not considered when setting this position.
`long`	`whatToShow`	This flag specifies which node types may appear in the logical view of the tree presented by the Iterator. See the description of Iterator for the set of possible values. These flags can be combined using OR. These flags can be combined using `OR`.
`NodeFilter` [p.255]	`filter`	The Filter to be used with this TreeWalker, or null to indicate no filter.
`boolean`	`entityReferenceExpansion`	The value of this flag determines whether entity reference nodes are expanded.

Return Value

`NodeIterator` [p.252]	The newly created `NodeIterator`.

No Exceptions

`createTreeWalker`

Create a new TreeWalker over the subtree rooted by the specified node.

Parameters

`Node` [p.34]	`root`	The node which will serve as the root for the `TreeWalker` [p.256] . The currentNode of the TreeWalker is set to this node. The whatToShow flags and the NodeFilter are not considered when setting this value; any node type will be accepted as the root. The root must not be null.
`long`	`whatToShow`	This flag specifies which node types may appear in the logical view of the tree presented by the Iterator. See the description of TreeWalker for the set of possible values. These flags can be combined using OR. These flags can be combined using `OR`.
`NodeFilter` [p.255]	`filter`	The Filter to be used with this TreeWalker, or null to indicate no filter.
`boolean`	`entityReferenceExpansion`	The value of this flag determines whether entity reference nodes are expanded.

Return Value

`TreeWalker` [p.256]	The newly created `TreeWalker`.

Exceptions

`DOMException` [p.21]	Raises the exception NOT_SUPPORTED_ERR if the specified root node is null.

8. Document Object Model Range

Editors
Vidur Apparao, Netscape Communications
Peter Sharpe, SoftQuad Software Inc.

8.1. Introduction

A Range identifies a range of content in a Document, DocumentFragment or Attr. It is contiguous in the sense that it can be characterized as selecting all of the content between a pair of end-points. ***Note:*** *In a text editor or a word processor, a user can make a selection by pressing down the mouse at one point in a document, moving the mouse to another point, and releasing the mouse. The resulting selection is contiguous and consists of the content between the two points.*
The term 'selecting' does not mean that every Range corresponds to a selection made by a GUI user; however, such a selection can be returned to a DOM user as a Range.

The Range interface provides methods for accessing and manipulating the document tree at a higher level than similar methods in the Node interface. The expectation is that each of the methods provided by the Range interface for the insertion, deletion and copying of content can be directly mapped to a series of Node editing operations enabled by DOM Core. In this sense, the Range operations can be viewed as convenience methods that also enable the implementation to optimize common editing patterns.

This chapter describes the Range interface, including methods for creating and moving a Range and methods for manipulating content with Ranges.

8.2. Definitions and Notation

8.2.1. Position

This chapter refers to two different representations of a document: the text or source form that includes the document markup and the tree representation similar to the one described in the Introduction [p.11] .

A Range consists of two *end-points* corresponding to the start and the end of the Range. An end-point's position in a document or document fragment tree can be characterized by a node and an offset. The node is called the *container* of the end-point and of its position. The container and its ancestors are the *ancestor container*s of the end-point and of its position. The offset within the node is called the *offset* of the end-point and its position. If the container is an Attribute, Document, Document Fragment, Element or EntityReference node, the offset is within its child nodes list. If the container is a CharacterData, Comment or ProcessingInstruction node, the offset is within the 16-bit units contained by it.

The *end-points* [p.265] of a Range must have a common *ancestor container* [p.265] which is either a Document, DocumentFragment or Attr node. That is, the content of a Range must be entirely within the subtree rooted by a single Document, DocumentFragment or Attr Node. This common *ancestor container* [p.265] is known as the *root container* of the Range. The tree rooted by the *root container* [p.265] is known as the Range's *context tree*.

The *container* [p.265] of an *end-point* [p.265] of a Range must be an Element, Comment, ProcessingInstruction, EntityReference, CDATASection, Document, DocumentFragment, Attr, or Text node. None of the *ancestor container* [p.265] s of the *end-point* of a Range can be a DocumentType, Entity or Notation node.

In terms of the text representation of a document, the *end-points* [p.265] of a Range can only be on token boundaries. That is, the *end-point* of the text range cannot be in the middle of a start- or end-tag of an element or within the name of an entity or character reference. A Range locates a contiguous portion of the content of the structure model.

The relationship between locations in a text representation of the document and in the Node tree interface of the DOM is illustrated in the following diagram:

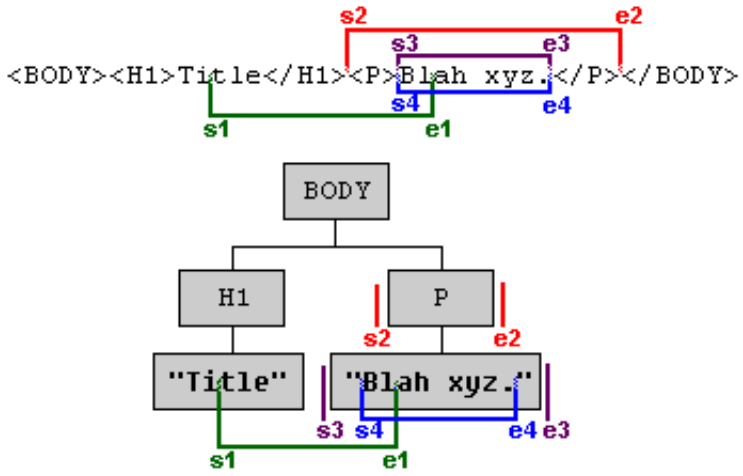

Range	s		e	
	Node	Offset	Node	Offset
s1—e1	Text1	2	Text2	2
s2—e2	BODY	1	BODY	2
s3—e3	P	0	P	1
s4—e4	Text2	0	Text2	9

Range Example

In this diagram, four different Ranges are illustrated. The *end-points* [p.265] of each range are labelled with *s#* (the start of the range) and *e#* (the end of the range), where # is the number of the Range. For Range 2, the start is in the BODY element and is immediately after the H1 element and immediately before the P element, so its position is between the H1 and P children of BODY. The *offset* [p.265] of an *end-point* whose *container* [p.265] is not a Text node is 0 if it is before the first child, 1 if between the first and second child, and so on. So, for the start of the Range 2, the *container* is BODY and the *offset* is 1. The *offset* of an *end-point* whose *container* is a Text node is obtained similarly but using 16-bit unit positions instead. For example, the *end-point* labelled s1 of the Range 1 has a Text node (the one

containing "Title") as its *container* and an *offset* of 2 since it is between the second and third 16-bit unit.

Notice that the *end-point* [p.265] s of Ranges 3 and 4 correspond to the same location in the text representation. An important feature of the Range is that an *end-point* of a Range can unambiguously represent every position within the document tree.

The *container* [p.265] s and *offset* [p.265] s of the *end-point* [p.265] s can be obtained through the following read-only Range attributes:

```
readonly attribute Node startContainer;
readonly attribute long startOffset;
readonly attribute Node endContainer;
readonly attribute long endOffset;
```

If the *end-point* [p.265] s of a Range have the same *container* [p.265] s and *offset* [p.265] s, the Range is said to be a *collapsed* Range. (This is often referred to as an insertion point in a user agent.)

8.2.2. Selection and Partial Selection

A node or 16-bit unit is said to be *selected* by a Range if it is between the two *end-point* [p.265] s of the Range, that is, if the position immediately before the node or 16-bit unit is before the end of the Range and the position immediately after the node or 16-bit unit is after the start of the range. For example, in terms of a text representation of the document, an element would be *selected* [p.267] by a Range if its corresponding start-tag was located after the start of the Range and its end-tag was located before the end of the Range. In the examples in the above diagram, the Range 2 *selects* the P node and the Range 3 *selects* the text node containing the text "Blah xyz."

A node is said to be *partially selected* by a Range if it is an *ancestor container* [p.265] of exactly one *end-point* [p.265] of the Range. For example, consider Range 1 in the above diagram. The element H1 is *partially selected* [p.267] by that Range since the start of the Range is within one of its children.

8.2.3. Notation

Many of the examples in this chapter are illustrated using a text representation of a document. The *end-point* [p.265] s of a range are indicated by displaying the characters (be they markup or data characters) between the two *end-point*s in bold, as in

```
<FOO>A<BAR>DE</BAR></FOO>
```

When both *end-point* [p.265] s are at the same position, they are indicated with a bold caret (’^’), as in

```
<FOO>A^BC<BAR>DEF</BAR></FOO>
```

And when referring to a single *end-point* [p.265] , it will be shown as a bold asterisk (’*’) as in

```
<FOO>A*BC<BAR>DEF</BAR></FOO>
```

8.3. Creating a Range

A range is created by calling the `createRange()` method on the `DocumentRange` [p.285] interface. This interface can be obtained from the object implementing the Document interface using binding-specific casting methods.

```
interface DocumentRange {
  Range createRange();
}
```

The initial state of the range returned from this method is such that both of its *end-point* [p.265] s are positioned at the beginning of the corresponding Document, before any content. In other words, the *container* [p.265] of each *end-point* is the Document node and the offset within that node is 0.

Like some objects created using methods in the Document interface (such as Nodes and DocumentFragments), Ranges created via a particular document instance can select only content associated with that Document, or with DocumentFragments and Attrs for which that Document is the `ownerDocument`. Such Ranges, then, can not be used with other Document instances.

8.4. Changing a Range's Position

A Range's position can be specified by setting the *container* [p.265] and *offset* [p.265] of each end-point with the `setStart` and `setEnd` methods.

```
void setStart(in Node parent, in long offset)
                      raises(RangeException);
void setEnd(in Node parent, in long offset)
              raises(RangeException);
```

If one end-point of a Range is set to have a *root container* [p.265] other than the current one for the range, the range is *collapsed* [p.267] to the new position. This enforces the restriction that both end-points of a Range must have the same *root container*.

The start position of a Range is guaranteed to never be after the end position. To enforce this restriction, if the start is set to be at a position after the end, the range is *collapsed* [p.267] to that position. Similarly, if the end is set to be at a position before the start, the range is *collapsed* to that position.

It is also possible to set a Range's position relative to nodes in the tree:

```
void setStartBefore(in Node node);
                               raises(RangeException);
void setStartAfter(in Node node);
                     raises(RangeException);
void setEndBefore(in Node node);
                    raises(RangeException);
void setEndAfter(in Node node);
                   raises(RangeException);
```

The parent of the node becomes the *container* [p.265] of the *end-point* [p.265] and the Range is subject to the same restrictions as given above in the description of `setStart()` and `setEnd()`.

A Range can be *collapsed* [p.267] to either end-point:

```
  void collapse(in boolean toStart);
```

Passing `TRUE` as the parameter `toStart` will *collapse* [p.267] the Range to its start , `FALSE` to its end.

Testing whether a Range is *collapsed* [p.267] can be done by examining the `isCollapsed` attribute:

```
  readonly attribute boolean isCollapsed;
```

The following methods can be used to make a range select the contents of a node or the node itself.

```
  void selectNode(in Node n);
  void selectNodeContents(in Node n);
```

The following examples demonstrate the operation of the methods `selectNode` and `selectNodeContents`:

```
Before:
  ^<BAR><FOO>A<MOO>B</MOO>C</FOO></BAR>
After range.selectNodeContents(FOO):
  <BAR><FOO>A<MOO>B</MOO>C</FOO></BAR>
After range.selectNode(FOO):

<BAR><FOO>A<MOO>B</MOO>C</FOO></BAR>
```

8.5. Comparing Range End-Points

It is possible to compare two Ranges by comparing their end-points:

```
  int compareEndPoints(in CompareHow how, in Range sourceRange) raises(RangeException);
```

where `CompareHow` [p.277] is one of four values: `StartToStart`, `StartToEnd`, `EndToEnd` and `EndToStart`. The return value is -1, 0 or 1 depending on whether the corresponding end-point of the Range is before, equal to, or after the corresponding end-point of `sourceRange`. An exception is thrown if the two Ranges have different *root container* [p.265] s.

The result of comparing two end-points (or positions) is specified below. An informal but not always correct specification is that an end-point is before, equal to, or after another if it corresponds to a location in a text representation before, equal to, or after the other's corresponding location.

Let A and B be two end-points or positions. Then one of the following holds: A is *before* B, A is *equal to* B, or A is *after* B. Which one holds is specified in the following by examining four cases:

In the first case the end-points have the same *container* [p.265] . A is *before* B if its *offset* [p.265] is less than the *offset* of B, A is *equal to* B if its *offset* is equal to the *offset* of B, and A if *after* B if its *offset* is greater than the *offset* of B.

In the second case a child C of the *container* [p.265] of A is an *ancestor container* [p.265] of B. In this case, A is *before* B if the *offset* [p.265] of A is less than or equal to the index of the child C and A is *after* B otherwise.

In the third case a child C of the *container* [p.265] of B is an *ancestor container* [p.265] of A. In this case, A is *before* B if the index of the child C is less than the *offset* [p.265] of B and A is *after* B otherwise.

In the fourth case, none of three other cases hold: the containers of A and B are siblings or descendants of sibling nodes. In this case, A is *before* B if the *container* [p.265] of A is before the *container* of B in a pre-order traversal of the Ranges' *context tree* [p.265] and A is *after* B otherwise.

Note that because the same location in a text representation of the document can correspond to two different positions in the DOM tree, it is possible for two end-points to not compare equal even though they would be equal in the text representation. For this reason, the informal definition above can sometimes be incorrect.

8.6. Deleting Content with a Range

One can delete the contents selected by a Range with:

```
  void deleteContents();
```

`deleteContents()` deletes all nodes and characters selected by the Range. All other nodes and characters remain in the *context tree* [p.265] of the Range. Some examples of this deletion operation are:

```
(1) <FOO>AB<MOO>CD</MOO>CD</FOO>  -->
<FOO>A^CD</FOO>

(2) <FOO>A<MOO>BC</MOO>DE</FOO>  -->
<FOO>A<MOO>B</MOO>^E</FOO>

(3) <FOO>XY<BAR>ZW</BAR>Q</FOO>  -->
<FOO>X^<BAR>W</BAR>Q</FOO>

(4)
<FOO><BAR1>AB</BAR1><BAR2/><BAR3>CD</BAR3></FOO>
-->  <FOO><BAR1>A</BAR1>^<BAR3>D</BAR3>
```

After `deleteContents()` is invoked on a Range, the Range is *collapsed* [p.267] . If no node was *partially selected* [p.267] by the Range, then it is *collapsed* to its original start point, as in example (1). If a node was *partially selected* by the Range and was an *ancestor container* [p.265] of the start of the Range and no ancestor of the node satisfies these two conditions, then the Range is collapsed to the position immediately after the node, as in examples (2) and (4). If a node was*partially selected* by the Range and was an *ancestor container* of the end of the Range and no ancestor of the node satisfies these two conditions, then the Range is collapsed to the position immediately before the node, as in examples (3) and (4).

8.7. Extracting Content

If the contents of a range need to be extracted rather than deleted, the following method may be used:

```
DocumentFragment extractContents();
```

The `extractContents()` method removes nodes from the Range's *context tree* [p.265] similarly to the `deleteContents()` method. In addition, it places the deleted contents in a new DocumentFragment. The following examples illustrate the contents of the returned document fragment:

```
(1) <FOO>AB<MOO>CD</MOO>CD</FOO>  -->
B<MOO>CD</MOO>

(2) <FOO>A<MOO>BC</MOO>DE</FOO>  -->
<MOO>C<MOO>D

(3) <FOO>XY<BAR>ZW</BAR>Q</FOO>  -->
Y<BAR>Z</BAR>

(4)
<FOO><BAR1>AB</BAR1><BAR2/><BAR3>CD</BAR3></FOO>
-->  <BAR1>B</BAR1><BAR2/><BAR3>C</BAR3>
```

It is important to note that nodes that are *partially selected* [p.267] by the range are cloned. Since part of such a node's contents must remain in the Range's *context tree* [p.265] and part of the contents must be moved to the new fragment, a clone of the *partially selected* node is included in the new fragment. Note that cloning does not take place for *selected* [p.267] elements; these nodes are moved to the new fragment.

8.8. Cloning Content

The contents of a range may be duplicated using the following method:

```
DocumentFragment cloneContents();
```

This method returns a DocumentFragment that is similar to the one returned by the method `extractContents()`. However, in this case, the original nodes and character data in the Range are not removed from the Range's *context tree* [p.265] . Instead, all of the nodes and text content within the returned DocumentFragment are cloned.

8.9. Inserting Content

A node may be inserted into a range using the following method:

```
void insertNode(in Node n) raises(RangeException);
```

The `insertNode()` method inserts the specified node into the Range's *context tree* [p.265] . For this method, the end of the range is ignored and the node is inserted at the start of the range.

The Node passed into this method can be a DocumentFragment. In that case, the contents of the fragment are inserted at the start position of the range, but the fragment itself is not. Note that if the Node represents the root of a sub-tree, the entire sub-tree is inserted.

The same rules that apply to the `insertBefore()` method on the Node interface apply here. Specifically, the Node passed in, if it is already has a parent, will be removed from its existing position.

8.10. Surrounding Content

The insertion of a single node to subsume the content selected by a Range can be performed with:

```
void surroundContents(in Node n);
```

The `surroundContents()` method causes all of the content selected by the range to be rooted by the specified node. Calling `surroundContents()` with the node FOO in the following examples yields:

```
Before:
  <BAR>AB<MOO>C</MOO>DE</BAR>
After surroundContents(FOO):

<BAR>A<FOO>B<MOO>C</MOO>D</FOO>E</BAR>
```

Another way of of describing the effect of this method on the Range's *context tree* [p.265] is to decompose it in terms of other operations:

1. Remove the contents selected by the range with a call to `extractContents()`.
2. Insert `node` where the range is now collapsed (after the extraction) with `insertNode()`
3. Insert the entire contents of the extracted fragment into `node`. Specifically, invoke the `appendChild()` on `node` passing in the DocumentFragment returned as a result of the call to `extractContents()`
4. Select `node` and all of its contents with `selectNode()`.

The `surroundContents()` method raises an exception if the range *partially selects* [p.267] a non-Text node. An example of a range for which `surroundContents()` raises an exception is:

```
<FOO>AB<BAR>CD</BAR>E</FOO>
```

If `node` has any children, those children are removed before its insertion. Also, if `node` already has a parent, it is removed from the original parent's `childNodes` list.

8.11. Miscellaneous Members

One can clone a Range:

```
Range cloneRange();
```

This creates a new Range which selects exactly the same content as that selected by the Range on which the method `cloneRange` was invoked. No content is affected by this operation.

Because the end-points of a range do not necessarily have the same *container* [p.265] s, use:

```
readonly attribute Node commonAncestorContainer;
```

to get the *ancestor container* [p.265] of both end-points that is furthest down from the Range's *root container* [p.265]

One can get a copy of all the character data selected or partially selected by a range with:

```
DOMString toString();
```

This does nothing more than simply concatenate all the character data selected by the range. This includes character data in both `Text` [p.59] and `CDATASection` [p.61] nodes.

8.12. Range modification under document mutation

As a document is modified, the Ranges within the document need to be updated. For example, if one end-point of a Range is within a node and that node is removed from the document, then the Range would be invalid unless it is fixed up in some way. This section describes how Ranges are modified under document mutations so that they remain valid.

There are two general principles which apply to Ranges under document mutation: The first is that all Ranges in a document will remain valid after any mutation operation and the second is that, as much as possible, all Ranges will select the same portion of the document after any mutation operation.

Any mutation of the document tree which affect Ranges can be considered to be a combination of basic delete and insertion operations. In fact, it can be convenient to think of those operations as being accomplished using the `deleteContents()` and `insertNode()` Range methods.

8.12.1. Insertions

An insertion occurs at a single point, the insertion point, in the document. For any Range in the document tree, consider each end-point. The only case in which the end-point will be changed after the insertion is when the end-point and the insertion point have the same *container* [p.265] and the *offset* [p.265] of the insertion point is strictly less than the *offset* of the Range's end-point. In that case the *offset* of the Range's end-point will be increased so that it is between the same nodes or characters as it was before the insertion.

Note that when content is inserted at an end-point, it is ambiguous as to where the end-point should be repositioned if its relative position is to be maintained.

This is not the same as the principle, given above, of having the Range select the same content, although often the Range ends up selecting the same content.There are two possibilities: at the start or at the end of the newly inserted content. We have chosen that in this case neither the *container* [p.265] nor *offset* [p.265] of the end-point is changed. As a result, it will be positioned at the start of the newly inserted

content.

Examples:

Suppose the Range selects the following:

```
<P>Abcd efgh XY blah ijkl</P>
```

Consider the insertion of the text "*inserted text*" at the following positions:

```
1. Before the 'X':

<P>Abcd efgh inserted textXY blah ijkl</P>

2. After the 'X':

<P>Abcd efgh Xinserted textY blah ijkl</P>

3. After the 'Y':

<P>Abcd efgh XYinserted text blah ijkl</P>

4. After the 'h' in "Y blah":

<P>Abcd efgh XY blahinserted text ijkl</P>
```

8.12.2. Deletions

Any deletion from the document tree can be considered as a sequence of `deleteContents()` operations applied to a minimal set of disjoint Ranges. To specify how a Range is modified under deletions we need only to consider what happens to a Range only under a single `deleteContents()` operation of another Range. And, in fact, we need only to consider what happens to a single end-point of the Range since both end-points are modified using the same algorithm.

If an end-point is within the content being deleted, then after the deletion it will be at the same position as the one common to the end-points of the Range used to delete the contents.

If an end-point is after the content being deleted then it is not affected by the deletion unless its *container* [p.265] is also the *container* of one of the end-points of the range being deleted. If there is such a common *container*, then the index of the end-point is modified so that the end-point maintains its position relative to the content of the *container*.

If an end-point is before the content being deleted then it is not affected by the deletion at all.

Examples:

In these examples, the Range on which `deleteContents()` is invoked is indicated by the underline.

Example 1.

Before:

```
<P>Abcd efgh The Range
ijkl</P>
```

After:

```
<P>Abcd Range ijkl</P>
```

Example 2.

Before:

```
<p>Abcd efgh The Range ijkl</p>
```

After:

```
<p>Abcd ^kl</p>
```

Example 3.

Before:

```
<P>ABCD efgh The
<EM>Range</EM> ijkl</P>
```

After:

```
<P>ABCD <EM>ange</EM> ijkl</P>
```

Example 4.

Before:

```
<P>Abcd efgh The Range ijkl</P>
```

After:

```
<P>Abcd he Range ijkl</P>
```

Example 5.

Before:

```
<P>Abcd <EM>efgh The Range
ij</EM>kl</P>
```

After:

```
<P>Abcd ^kl</P>
```

8.13. Formal Description of the Range Interface

To summarize, the complete, formal description of the `Range` [p.276] interface is given below:

Interface *Range* (introduced in **DOM Level 2**)

IDL Definition

```
// Introduced in DOM Level 2:
interface Range {
  readonly attribute Node             startContainer;
  readonly attribute long             startOffset;
  readonly attribute Node             endContainer;
  readonly attribute long             endOffset;
  readonly attribute boolean          isCollapsed;
  readonly attribute Node             commonAncestorContainer;
  void               setStart(in Node refNode,
                              in long offset)
                                        raises(RangeException);
  void               setEnd(in Node refNode,
                            in long offset)
                                        raises(RangeException);
  void               setStartBefore(in Node refNode)
                                        raises(RangeException);
  void               setStartAfter(in Node refNode)
                                        raises(RangeException);
  void               setEndBefore(in Node refNode)
                                        raises(RangeException);
  void               setEndAfter(in Node refNode)
                                        raises(RangeException);
  void               collapse(in boolean toStart);
  void               selectNode(in Node refNode)
                                        raises(RangeException);
  void               selectNodeContents(in Node refNode)
                                        raises(RangeException);

  typedef enum CompareHow_ {
    StartToStart,
    StartToEnd,
    EndToEnd,
    EndToStart
  } CompareHow;
  short              compareEndPoints(in CompareHow how,
                                      in Range sourceRange)
                                        raises(DOMException);
  void               deleteContents()
                                        raises(DOMException);
  DocumentFragment   extractContents()
                                        raises(DOMException);
  DocumentFragment   cloneContents()
                                        raises(DOMException);
  void               insertNode(in Node newNode)
                                        raises(DOMException,
                                               RangeException);
  void               surroundContents(in Node newParent)
                                        raises(DOMException,
```

```
                                                    RangeException);
  Range               cloneRange();
  DOMString           toString();
};
```

Attributes

`startContainer` of type `Node` [p.34] , readonly
Node within which the range begins

`startOffset` of type `long`, readonly
Offset within the starting node of the range.

`endContainer` of type `Node` [p.34] , readonly
Node within which the range ends

`endOffset` of type `long`, readonly
Offset within the ending node of the range.

`isCollapsed` of type `boolean`, readonly
TRUE if the range is collapsed

`commonAncestorContainer` of type `Node` [p.34] , readonly
The common *ancestor container* [p.265] of the range's two end-points.

Type Definition *CompareHow*
Enumeration *CompareHow_*

Enumerator Values

StartToStart	
StartToEnd	
EndToEnd	
EndToStart	

Methods

`setStart`
Sets the attributes describing the start of the range.
Parameters

`Node` [p.34]	`refNode`	The `refNode` value. This parameter must be different from `null`.
`long`	`offset`	The `startOffset` value.

Exceptions

`RangeException` [p.285]	NULL_NODE_ERR: Raised if `refNode` is `null`. INVALID_NODE_TYPE_ERR: Raised if `refNode` or an ancestor of `refNode` is an Attr, Entity, Notation, or DocumentType node. If an offset is out-of-bounds, should it just be fixed up or should an exception be raised.

No Return Value

`setEnd`

Sets the attributes describing the end of a range.

Parameters

`Node` [p.34]	`refNode`	The `refNode` value. This parameter must be different from `null`.
`long`	`offset`	The `endOffset` value.

Exceptions

`RangeException` [p.285]	NULL_NODE_ERR: Raised if `refNode` is `null`. INVALID_NODE_TYPE_ERR: Raised if `refNode` or an ancestor of `refNode` is an Attr, Entity, Notation, or DocumentType node.

No Return Value

`setStartBefore`

Sets the start position to be before a node

Parameters

`Node` [p.34]	`refNode`	Range starts before `refNode`

Exceptions

`RangeException` [p.285]	INVALID_NODE_TYPE_ERR: Raised if an ancestor of `refNode` is an Attr, Entity, Notation, or DocumentType node or if `refNode` is a Document, DocumentFragment, Attr, Entity, or Notation node.

No Return Value

`setStartAfter`
Sets the start position to be after a node
Parameters

`Node` [p.34]	`refNode`	Range starts after `refNode`

Exceptions

`RangeException` [p.285]	INVALID_NODE_TYPE_ERR: Raised if an ancestor of `refNode` is an Attr, Entity, Notation, or DocumentType node or if `refNode` is a Document, DocumentFragment, Attr, Entity, or Notation node.

No Return Value

`setEndBefore`
Sets the end position to be before a node.
Parameters

`Node` [p.34]	`refNode`	Range ends before `refNode`

Exceptions

`RangeException` [p.285]	INVALID_NODE_TYPE_ERR: Raised if an ancestor of `refNode` is an Attr, Entity, Notation, or DocumentType node or if `refNode` is a Document, DocumentFragment, Attr, Entity, or Notation node.

No Return Value

`setEndAfter`
Sets the end of a range to be after a node
Parameters

`Node` [p.34]	`refNode`	Range ends after `refNode`.

Exceptions

`RangeException` [p.285]	INVALID_NODE_TYPE_ERR: Raised if an ancestor of `refNode` is an Attr, Entity, Notation or DocumentType node or if `refNode` is a Document, DocumentFragment, Attr, Entity, or Notation node.

No Return Value

`collapse`

Collapse a range onto one of its end-points

Parameters

`boolean`	`toStart`	If TRUE, collapses the Range onto its start; if FALSE, collapses it onto its end.

No Return Value

No Exceptions

`selectNode`

Select a node and its contents

Parameters

`Node` [p.34]	`refNode`	The node to select.

Exceptions

`RangeException` [p.285]	INVALID_NODE_TYPE_ERR: Raised if an ancestor of `refNode` is an Attr, Entity, Notation or DocumentType node or if `refNode` is a Document, DocumentFragment, Attr, Entity, or Notation node.

No Return Value

`selectNodeContents`

Select the contents within a node

Parameters

`Node` [p.34]	`refNode`	Node to select from

Exceptions

`RangeException` [p.285]	INVALID_NODE_TYPE_ERR: Raised if `refNode` or an ancestor of `refNode` is an Attr, Entity, Notation or DocumentType node.

No Return Value

`compareEndPoints`

Compare the end-points of two ranges in a document.

Parameters

`CompareHow` [p.277]	`how`
`Range` [p.276]	`sourceRange`

Return Value

`short`	-1, 0 or 1 depending on whether the corresponding end-point of the Range is before, equal to, or after the corresponding end-point of `sourceRange`.

Exceptions

`DOMException` [p.21]	WRONG_DOCUMENT_ERR: Raised if the two Ranges are not in the same document or document fragment.

`deleteContents`

Removes the contents of a range from the containing document or document fragment without returning a reference to the removed content.

Exceptions

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if any portion of the content of the range is read-only or any of the nodes that contain any of the content of the range are read-only.

No Parameters

No Return Value

`extractContents`

Moves the contents of a range from the containing document or document fragment to a new DocumentFragment.

Return Value

`DocumentFragment` [p.24]	A DocumentFragment containing the extracted contents.

Exceptions

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if any portion of the content of the range is read-only or any of the nodes which contain any of the content of the range are read-only. HIERARCHY_REQUEST_ERR: Raised if a DocumentType node would be extracted into the new DocumentFragment.

No Parameters

`cloneContents`

Duplicates the contents of a range

Return Value

`DocumentFragment` [p.24]	A DocumentFragment containing contents equivalent to those of this range.

Exceptions

`DOMException` [p.21]	HIERARCHY_REQUEST_ERR: Raised if a DocumentType node would be extracted into the new DocumentFragment.

No Parameters

`insertNode`

Inserts a node into the document or document fragment at the start of the range.

Parameters

`Node` [p.34]	`newNode`	The node to insert at the start of the range

Exceptions

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if an *ancestor container* [p.265] of the start of the range is read-only. WRONG_DOCUMENT_ERR: Raised if `newNode` and the *container* [p.265] of the start of the Range were not created from the same document. HIERARCHY_REQUEST_ERR: Raised if the *container* [p.265] of the start of the Range is of a type that does not allow children of the type of `newNode` or if `newNode` is an ancestor of the *container*.
`RangeException` [p.285]	INVALID_NODE_TYPE_ERR: Raised if `node` is an Attr, Entity, Notation, DocumentFragment, or Document node.

No Return Value

`surroundContents`

Reparents the contents of the range to the given node and inserts the node at the position of the start of the range.

Parameters

`Node` [p.34]	`newParent`	The node to surround the contents with.

Exceptions

`DOMException` [p.21]	NO_MODIFICATION_ALLOWED_ERR: Raised if an *ancestor container* [p.265] of either end-point of the range is read-only. WRONG_DOCUMENT_ERR: Raised if `newParent` and the *container* [p.265] of the start of the Range were not created from the same document. HIERARCHY_REQUEST_ERR: Raised if the *container* [p.265] of the start of the Range is of a type that does not allow children of the type of `newParent` or if `newParent` is an ancestor of the *container* or if `node` would end up with a child node of a type not allowed by the type of `node`.
`RangeException` [p.285]	BAD_ENDPOINTS_ERR: Raised if the range *partially selects* [p.267] a non-text node. INVALID_NODE_TYPE_ERR: Raised if `node` is an Attr, Entity, DocumentType, Notation, Document, or DocumentFragment node.

No Return Value

`cloneRange`

Produces a new range whose end-points are equal to the end-points of the range.

Return Value

`Range` [p.276]	The duplicated range.

No Parameters
No Exceptions

`toString`

Returns the contents of a range as a string.

Return Value

`DOMString` [p.19]	The contents of the range.

No Parameters
No Exceptions

Interface *DocumentRange* (introduced in **DOM Level 2**)

IDL Definition

```
// Introduced in DOM Level 2:
interface DocumentRange {
  Range              createRange();
};
```

Methods

`createRange`

This interface can be obtained from the object implementing the `Document` [p.25] interface using binding-specific casting methods.

Return Value

`Range` [p.276]	The initial state of the range returned from this method is such that both of its end-points are positioned at the beginning of the corresponding Document, before any content. The range returned can only be used to select content associated with this Document, or with DocumentFragments and Attrs for which this Document is the `ownerDocument`.

No Parameters

No Exceptions

Exception *RangeException* introduced in **DOM Level 2**

The Range object needs additional exception codes to those in DOM Level 1. These codes will need to be consolidated with other exception codes added to DOM Level 2.

IDL Definition

```
// Introduced in DOM Level 2:
exception RangeException {
  unsigned short   code;
};

// RangeExceptionCode
const unsigned short      BAD_ENDPOINTS_ERR             = 201;
const unsigned short      INVALID_NODE_TYPE_ERR         = 202;
const unsigned short      NULL_NODE_ERR                 = 203;
```

Definition group *RangeExceptionCode*

An integer indicating the type of error generated.

Defined Constants

BAD_ENDPOINTS_ERR	If the end-points of a range do not meet specific requirements.
INVALID_NODE_TYPE_ERR	If the *container* [p.265] of an end-point of a range is being set to either a node of an invalid type or a node with an ancestor of an invalid type.
NULL_NODE_ERR	If the *container* [p.265] of an end-point of a range is being set to `null`.

Appendix A: Changes

Editors
Arnaud Le Hors, W3C

A.1: Changes between DOM Level 1 and DOM Level 2

A.1.1: Changes to DOM Level 1 interfaces

Interface Attr [p.50]
The `Attr` [p.50] interface has one new attribute: `ownerElement`.

Interface Document [p.25]
The `Document` [p.25] interface has four new methods: `importNode`, `createElementNS`, `createAttributeNS` and `getElementsByTagNameNS`.

Interface NamedNodeMap [p.25]
The `NamedNodeMap` [p.43] interface has two new methods: `getNamedItemNS`, `removeNamedItemNS`.

Interface Node [p.34]
The `Node` [p.34] interface has one new method: `supports`.
The `Node` [p.34] interface has three new attributes: `namespaceURI`, `prefix` and `localName`.
The `ownerDocument` attribute was specified to be `null` when the node is a `Document` [p.25] . It is now also `null` when the node is a `DocumentType` [p.61] which is not used with any `Document` yet.

Interface DocumentType [p.61]
The `DocumentType` [p.61] interface has two new attributes: `publicID` and `systemID`.

Interface DOMImplementation [p.22]
The `DOMImplementation` [p.22] interface has two new methods: `createDocumentType` and `createDocument`.

Interface Element [p.52]
The `Element` [p.52] interface has six new methods: `getAttributeNS`, `setAttributeNS`, `removeAttributeNS`, `getAttributeNodeNS`, `setAttributeNodeNS`, `getElementsByTagNameNS`.

A.1.2: New interfaces

HTML [p.67]
The `HTMLDOMImplementation` [p.68] interface was added to the HTML module.

Views [p.117]
This new module defines the interface `AbstractView` [p.117] .

StyleSheets [p.119]
This new module defines the following interfaces: `StyleSheet` [p.119] , `StyleSheetList` [p.120] , `MediaList` [p.121] , `DocumentStyle` [p.123] and `LinkStyle` [p.123] .

CSS [p.125]
This new module defines the following interfaces `CSSException` [p.126] , `CSS2Azimuth` [p.153] , `CSS2BackgroundPosition` [p.156] , `CSS2BorderSpacing` [p.159] ,

CSS2CounterIncrement [p.162] , CSS2CounterReset [p.161] , CSS2Cursor [p.162] , CSS2FontFaceSrc [p.166] , CSS2FontFaceWidths [p.167] , CSS2PageSize [p.168] , CSS2PlayDuring [p.163] , CSS2Properties [p.171] , CSS2TextShadow [p.164] , CSSCharsetRule [p.134] , CSSFontFaceRule [p.132] , CSSImportRule [p.133] , CSSMediaRule [p.131] , CSSPageRule [p.133] , CSSPrimitiveValue [p.139] , CSSRule [p.129] , CSSRuleList [p.128] , CSSStyleDeclaration [p.134] , CSSStyleRule [p.130] , CSSStyleSheet [p.126] , CSSUnknownRule [p.134] , CSSValue [p.138] , CSSValueList [p.145] , Counter [p.147] , RGBColor [p.146] , Rect [p.146] , ViewCSS [p.147] , DocumentCSS [p.148] , DOMImplementationCSS [p.149] and HTMLElementCSS [p.208] .

Events [p.209]

This new module defines the following interfaces Event [p.215] , EventListener [p.214] , EventTarget [p.211] , MutationEvent [p.239] , UIEvent [p.218] , MouseEvent [p.221] , and KeyEvent [p.225] .

Traversal [p.245]

This new module defines the following interfaces NodeFilter [p.255] , NodeIterator [p.252] , TreeWalker [p.256] , and DocumentTraversal [p.260] .

Range [p.265]

This new module defines the interface Range [p.276] and the exception RangeException [p.285] .

Appendix B: IDL Definitions

This appendix contains the complete OMG IDL for the Level 2 Document Object Model definitions. The definitions are divided into Core [p.289] , HTML [p.294] , Stylesheets [p.303] , CSS [p.305] , Events [p.321] , TreeWalkers, Filters, and Iterators [p.326] , and Range [p.328] .

The IDL files are also available as: http://www.w3.org/TR/1999/WD-DOM-Level-2-19990923/idl.zip

B.1: Document Object Model Core

dom.idl:

```
// File: dom.idl
#ifndef _DOM_IDL_
#define _DOM_IDL_

#pragma prefix "w3c.org"
module dom
{
  typedef sequence<unsigned short> DOMString;

  interface DocumentType;
  interface Document;
  interface NodeList;
  interface NamedNodeMap;
  interface Element;

  exception DOMException {
    unsigned short   code;
  };

  // ExceptionCode
  const unsigned short      INDEX_SIZE_ERR                = 1;
  const unsigned short      DOMSTRING_SIZE_ERR            = 2;
  const unsigned short      HIERARCHY_REQUEST_ERR         = 3;
  const unsigned short      WRONG_DOCUMENT_ERR            = 4;
  const unsigned short      INVALID_CHARACTER_ERR         = 5;
  const unsigned short      NO_DATA_ALLOWED_ERR           = 6;
  const unsigned short      NO_MODIFICATION_ALLOWED_ERR   = 7;
  const unsigned short      NOT_FOUND_ERR                 = 8;
  const unsigned short      NOT_SUPPORTED_ERR             = 9;
  const unsigned short      INUSE_ATTRIBUTE_ERR           = 10;


  interface DOMImplementation {
    boolean            hasFeature(in DOMString feature,
                                  in DOMString version);
    // Introduced in DOM Level 2:
    DocumentType       createDocumentType(in DOMString qualifiedName,
                                          in DOMString publicID,
                                          in DOMString systemID);
    // Introduced in DOM Level 2:
    Document           createDocument(in DOMString namespaceURI,
```

```
                                    in DOMString qualifiedName,
                                    in DocumentType doctype)
                                      raises(DOMException);
};

interface Node {
  // NodeType
  const unsigned short      ELEMENT_NODE                   = 1;
  const unsigned short      ATTRIBUTE_NODE                 = 2;
  const unsigned short      TEXT_NODE                      = 3;
  const unsigned short      CDATA_SECTION_NODE             = 4;
  const unsigned short      ENTITY_REFERENCE_NODE          = 5;
  const unsigned short      ENTITY_NODE                    = 6;
  const unsigned short      PROCESSING_INSTRUCTION_NODE    = 7;
  const unsigned short      COMMENT_NODE                   = 8;
  const unsigned short      DOCUMENT_NODE                  = 9;
  const unsigned short      DOCUMENT_TYPE_NODE             = 10;
  const unsigned short      DOCUMENT_FRAGMENT_NODE         = 11;
  const unsigned short      NOTATION_NODE                  = 12;

  readonly attribute DOMString        nodeName;
           attribute DOMString        nodeValue;
                                      // raises(DOMException) on setting
                                      // raises(DOMException) on retrieval

  readonly attribute unsigned short   nodeType;
  readonly attribute Node             parentNode;
  readonly attribute NodeList         childNodes;
  readonly attribute Node             firstChild;
  readonly attribute Node             lastChild;
  readonly attribute Node             previousSibling;
  readonly attribute Node             nextSibling;
  readonly attribute NamedNodeMap     attributes;
  // Modified in DOM Level 2:
  readonly attribute Document         ownerDocument;
  Node                insertBefore(in Node newChild,
                                   in Node refChild)
                                      raises(DOMException);
  Node                replaceChild(in Node newChild,
                                   in Node oldChild)
                                      raises(DOMException);
  Node                removeChild(in Node oldChild)
                                      raises(DOMException);
  Node                appendChild(in Node newChild)
                                      raises(DOMException);
  boolean             hasChildNodes();
  Node                cloneNode(in boolean deep);
  // Introduced in DOM Level 2:
  boolean             supports(in DOMString feature,
                               in DOMString version);
  // Introduced in DOM Level 2:
  readonly attribute DOMString        namespaceURI;
  // Introduced in DOM Level 2:
           attribute DOMString        prefix;
                                      // raises(DOMException) on setting

  // Introduced in DOM Level 2:
```

```
  readonly attribute DOMString        localName;
};

interface NodeList {
  Node               item(in unsigned long index);
  readonly attribute unsigned long    length;
};

interface NamedNodeMap {
  Node               getNamedItem(in DOMString name);
  Node               setNamedItem(in Node arg)
                                  raises(DOMException);
  Node               removeNamedItem(in DOMString name)
                                  raises(DOMException);
  Node               item(in unsigned long index);
  readonly attribute unsigned long    length;
  // Introduced in DOM Level 2:
  Node               getNamedItemNS(in DOMString namespaceURI,
                                    in DOMString localName);
  // Introduced in DOM Level 2:
  Node               removeNamedItemNS(in DOMString namespaceURI,
                                       in DOMString name)
                                  raises(DOMException);
};

interface CharacterData : Node {
           attribute DOMString        data;
                                  // raises(DOMException) on setting
                                  // raises(DOMException) on retrieval

  readonly attribute unsigned long    length;
  DOMString          substringData(in unsigned long offset,
                                   in unsigned long count)
                                      raises(DOMException);
  void               appendData(in DOMString arg)
                                      raises(DOMException);
  void               insertData(in unsigned long offset,
                                in DOMString arg)
                                      raises(DOMException);
  void               deleteData(in unsigned long offset,
                                in unsigned long count)
                                      raises(DOMException);
  void               replaceData(in unsigned long offset,
                                 in unsigned long count,
                                 in DOMString arg)
                                      raises(DOMException);
};

interface Attr : Node {
  readonly attribute DOMString        name;
  readonly attribute boolean          specified;
           attribute DOMString        value;
                                  // raises(DOMException) on setting

  // Introduced in DOM Level 2:
  readonly attribute Element          ownerElement;
};
```

```
interface Element : Node {
  readonly attribute DOMString        tagName;
  DOMString           getAttribute(in DOMString name);
  void                setAttribute(in DOMString name,
                                   in DOMString value)
                                      raises(DOMException);
  void                removeAttribute(in DOMString name)
                                      raises(DOMException);
  Attr                getAttributeNode(in DOMString name);
  Attr                setAttributeNode(in Attr newAttr)
                                      raises(DOMException);
  Attr                removeAttributeNode(in Attr oldAttr)
                                      raises(DOMException);
  NodeList            getElementsByTagName(in DOMString name);
  void                normalize();
  // Introduced in DOM Level 2:
  DOMString           getAttributeNS(in DOMString namespaceURI,
                                     in DOMString localName);
  // Introduced in DOM Level 2:
  void                setAttributeNS(in DOMString namespaceURI,
                                     in DOMString localName,
                                     in DOMString value)
                                       raises(DOMException);
  // Introduced in DOM Level 2:
  void                removeAttributeNS(in DOMString namespacURI,
                                        in DOMString localName)
                                      raises(DOMException);
  // Introduced in DOM Level 2:
  Attr                getAttributeNodeNS(in DOMString namespaceURI,
                                         in DOMString localName);
  // Introduced in DOM Level 2:
  Attr                setAttributeNodeNS(in Attr newAttr)
                                      raises(DOMException);
  // Introduced in DOM Level 2:
  NodeList            getElementsByTagNameNS(in DOMString namespaceURI,
                                             in DOMString localName);
};

interface Text : CharacterData {
  Text                splitText(in unsigned long offset)
                                      raises(DOMException);
};

interface Comment : CharacterData {
};

interface CDATASection : Text {
};

interface DocumentType : Node {
  readonly attribute DOMString        name;
  readonly attribute NamedNodeMap     entities;
  readonly attribute NamedNodeMap     notations;
  // Introduced in DOM Level 2:
  readonly attribute DOMString        publicID;
  // Introduced in DOM Level 2:
```

```
  readonly attribute DOMString        systemID;
};

interface Notation : Node {
  readonly attribute DOMString        publicId;
  readonly attribute DOMString        systemId;
};

interface Entity : Node {
  readonly attribute DOMString        publicId;
  readonly attribute DOMString        systemId;
  readonly attribute DOMString        notationName;
};

interface EntityReference : Node {
};

interface ProcessingInstruction : Node {
  readonly attribute DOMString        target;
           attribute DOMString        data;
                                      // raises(DOMException) on setting

};

interface DocumentFragment : Node {
};

interface Document : Node {
  readonly attribute DocumentType     doctype;
  readonly attribute DOMImplementation  implementation;
  readonly attribute Element          documentElement;
  Element             createElement(in DOMString tagName)
                                      raises(DOMException);
  DocumentFragment    createDocumentFragment();
  Text                createTextNode(in DOMString data);
  Comment             createComment(in DOMString data);
  CDATASection        createCDATASection(in DOMString data)
                                      raises(DOMException);
  ProcessingInstruction createProcessingInstruction(in DOMString target,
                                                     in DOMString data)
                                      raises(DOMException);
  Attr                createAttribute(in DOMString name)
                                      raises(DOMException);
  EntityReference     createEntityReference(in DOMString name)
                                      raises(DOMException);
  NodeList            getElementsByTagName(in DOMString tagname);
  // Introduced in DOM Level 2:
  Node                importNode(in Node importedNode,
                                 in boolean deep)
                                      raises(DOMException);
  // Introduced in DOM Level 2:
  Element             createElementNS(in DOMString namespaceURI,
                                      in DOMString qualifiedName)
                                      raises(DOMException);
  // Introduced in DOM Level 2:
  Attr                createAttributeNS(in DOMString namespaceURI,
                                        in DOMString qualifiedName)
```

```
                                        raises(DOMException);
    // Introduced in DOM Level 2:
    NodeList           getElementsByTagNameNS(in DOMString namespaceURI,
                                              in DOMString localName);
  };
};

#endif // _DOM_IDL_
```

B.2: Document Object Model HTML

html.idl:

```
// File: html.idl
#ifndef _HTML_IDL_
#define _HTML_IDL_

#include "dom.idl"

#pragma prefix "dom.w3c.org"
module html
{
  typedef dom::DOMString DOMString;
  typedef dom::Node Node;
  typedef dom::DOMImplementation DOMImplementation;
  typedef dom::Document Document;
  typedef dom::Element Element;
  typedef dom::NodeList NodeList;

  interface HTMLDocument;
  interface HTMLElement;
  interface HTMLFormElement;
  interface HTMLTableCaptionElement;
  interface HTMLTableSectionElement;

  interface HTMLCollection {
    readonly attribute unsigned long    length;
    Node               item(in unsigned long index);
    Node               namedItem(in DOMString name);
  };

  // Introduced in DOM Level 2:
  interface HTMLDOMImplementation : DOMImplementation {
    HTMLDocument       createHTMLDocument(in DOMString title);
  };

  interface HTMLDocument : Document {
             attribute DOMString        title;
    readonly attribute DOMString        referrer;
    readonly attribute DOMString        domain;
    readonly attribute DOMString        URL;
             attribute HTMLElement      body;
    readonly attribute HTMLCollection   images;
    readonly attribute HTMLCollection   applets;
    readonly attribute HTMLCollection   links;
```

```
  readonly attribute HTMLCollection   forms;
  readonly attribute HTMLCollection   anchors;
           attribute DOMString        cookie;
  void               open();
  void               close();
  void               write(in DOMString text);
  void               writeln(in DOMString text);
  Element            getElementById(in DOMString elementId);
  NodeList           getElementsByName(in DOMString elementName);
};

interface HTMLElement : Element {
           attribute DOMString        id;
           attribute DOMString        title;
           attribute DOMString        lang;
           attribute DOMString        dir;
           attribute DOMString        className;
};

interface HTMLHtmlElement : HTMLElement {
           attribute DOMString        version;
};

interface HTMLHeadElement : HTMLElement {
           attribute DOMString        profile;
};

interface HTMLLinkElement : HTMLElement {
           attribute boolean          disabled;
           attribute DOMString        charset;
           attribute DOMString        href;
           attribute DOMString        hreflang;
           attribute DOMString        media;
           attribute DOMString        rel;
           attribute DOMString        rev;
           attribute DOMString        target;
           attribute DOMString        type;
};

interface HTMLTitleElement : HTMLElement {
           attribute DOMString        text;
};

interface HTMLMetaElement : HTMLElement {
           attribute DOMString        content;
           attribute DOMString        httpEquiv;
           attribute DOMString        name;
           attribute DOMString        scheme;
};

interface HTMLBaseElement : HTMLElement {
           attribute DOMString        href;
           attribute DOMString        target;
};

interface HTMLIsIndexElement : HTMLElement {
  readonly attribute HTMLFormElement  form;
```

```
           attribute DOMString        prompt;
};

interface HTMLStyleElement : HTMLElement {
           attribute boolean          disabled;
           attribute DOMString        media;
           attribute DOMString        type;
};

interface HTMLBodyElement : HTMLElement {
           attribute DOMString        aLink;
           attribute DOMString        background;
           attribute DOMString        bgColor;
           attribute DOMString        link;
           attribute DOMString        text;
           attribute DOMString        vLink;
};

interface HTMLFormElement : HTMLElement {
  readonly attribute HTMLCollection   elements;
  readonly attribute long             length;
           attribute DOMString        name;
           attribute DOMString        acceptCharset;
           attribute DOMString        action;
           attribute DOMString        enctype;
           attribute DOMString        method;
           attribute DOMString        target;
  void               submit();
  void               reset();
};

interface HTMLSelectElement : HTMLElement {
  readonly attribute DOMString        type;
           attribute long             selectedIndex;
           attribute DOMString        value;
  readonly attribute long             length;
  readonly attribute HTMLFormElement  form;
  readonly attribute HTMLCollection   options;
           attribute boolean          disabled;
           attribute boolean          multiple;
           attribute DOMString        name;
           attribute long             size;
           attribute long             tabIndex;
  void               add(in HTMLElement element,
                         in HTMLElement before);
  void               remove(in long index);
  void               blur();
  void               focus();
};

interface HTMLOptGroupElement : HTMLElement {
           attribute boolean          disabled;
           attribute DOMString        label;
};

interface HTMLOptionElement : HTMLElement {
  readonly attribute HTMLFormElement  form;
```

```
           attribute boolean          defaultSelected;
  readonly attribute DOMString        text;
  readonly attribute long             index;
           attribute boolean          disabled;
           attribute DOMString        label;
           attribute boolean          selected;
           attribute DOMString        value;
};

interface HTMLInputElement : HTMLElement {
           attribute DOMString        defaultValue;
           attribute boolean          defaultChecked;
  readonly attribute HTMLFormElement  form;
           attribute DOMString        accept;
           attribute DOMString        accessKey;
           attribute DOMString        align;
           attribute DOMString        alt;
           attribute boolean          checked;
           attribute boolean          disabled;
           attribute long             maxLength;
           attribute DOMString        name;
           attribute boolean          readOnly;
           attribute DOMString        size;
           attribute DOMString        src;
           attribute long             tabIndex;
  readonly attribute DOMString        type;
           attribute DOMString        useMap;
           attribute DOMString        value;
  void               blur();
  void               focus();
  void               select();
  void               click();
};

interface HTMLTextAreaElement : HTMLElement {
           attribute DOMString        defaultValue;
  readonly attribute HTMLFormElement  form;
           attribute DOMString        accessKey;
           attribute long             cols;
           attribute boolean          disabled;
           attribute DOMString        name;
           attribute boolean          readOnly;
           attribute long             rows;
           attribute long             tabIndex;
  readonly attribute DOMString        type;
           attribute DOMString        value;
  void               blur();
  void               focus();
  void               select();
};

interface HTMLButtonElement : HTMLElement {
  readonly attribute HTMLFormElement  form;
           attribute DOMString        accessKey;
           attribute boolean          disabled;
           attribute DOMString        name;
           attribute long             tabIndex;
```

```
  readonly attribute DOMString        type;
           attribute DOMString        value;
};

interface HTMLLabelElement : HTMLElement {
  readonly attribute HTMLFormElement  form;
           attribute DOMString        accessKey;
           attribute DOMString        htmlFor;
};

interface HTMLFieldSetElement : HTMLElement {
  readonly attribute HTMLFormElement  form;
};

interface HTMLLegendElement : HTMLElement {
  readonly attribute HTMLFormElement  form;
           attribute DOMString        accessKey;
           attribute DOMString        align;
};

interface HTMLUListElement : HTMLElement {
           attribute boolean          compact;
           attribute DOMString        type;
};

interface HTMLOListElement : HTMLElement {
           attribute boolean          compact;
           attribute long             start;
           attribute DOMString        type;
};

interface HTMLDListElement : HTMLElement {
           attribute boolean          compact;
};

interface HTMLDirectoryElement : HTMLElement {
           attribute boolean          compact;
};

interface HTMLMenuElement : HTMLElement {
           attribute boolean          compact;
};

interface HTMLLIElement : HTMLElement {
           attribute DOMString        type;
           attribute long             value;
};

interface HTMLDivElement : HTMLElement {
           attribute DOMString        align;
};

interface HTMLParagraphElement : HTMLElement {
           attribute DOMString        align;
};

interface HTMLHeadingElement : HTMLElement {
```

```
           attribute DOMString        align;
};

interface HTMLQuoteElement : HTMLElement {
           attribute DOMString        cite;
};

interface HTMLPreElement : HTMLElement {
           attribute long             width;
};

interface HTMLBRElement : HTMLElement {
           attribute DOMString        clear;
};

interface HTMLBaseFontElement : HTMLElement {
           attribute DOMString        color;
           attribute DOMString        face;
           attribute DOMString        size;
};

interface HTMLFontElement : HTMLElement {
           attribute DOMString        color;
           attribute DOMString        face;
           attribute DOMString        size;
};

interface HTMLHRElement : HTMLElement {
           attribute DOMString        align;
           attribute boolean          noShade;
           attribute DOMString        size;
           attribute DOMString        width;
};

interface HTMLModElement : HTMLElement {
           attribute DOMString        cite;
           attribute DOMString        dateTime;
};

interface HTMLAnchorElement : HTMLElement {
           attribute DOMString        accessKey;
           attribute DOMString        charset;
           attribute DOMString        coords;
           attribute DOMString        href;
           attribute DOMString        hreflang;
           attribute DOMString        name;
           attribute DOMString        rel;
           attribute DOMString        rev;
           attribute DOMString        shape;
           attribute long             tabIndex;
           attribute DOMString        target;
           attribute DOMString        type;
  void               blur();
  void               focus();
};

interface HTMLImageElement : HTMLElement {
```

```
            attribute DOMString        lowSrc;
            attribute DOMString        name;
            attribute DOMString        align;
            attribute DOMString        alt;
            attribute DOMString        border;
            attribute DOMString        height;
            attribute DOMString        hspace;
            attribute boolean          isMap;
            attribute DOMString        longDesc;
            attribute DOMString        src;
            attribute DOMString        useMap;
            attribute DOMString        vspace;
            attribute DOMString        width;
};

interface HTMLObjectElement : HTMLElement {
  readonly attribute HTMLFormElement  form;
            attribute DOMString        code;
            attribute DOMString        align;
            attribute DOMString        archive;
            attribute DOMString        border;
            attribute DOMString        codeBase;
            attribute DOMString        codeType;
            attribute DOMString        data;
            attribute boolean          declare;
            attribute DOMString        height;
            attribute DOMString        hspace;
            attribute DOMString        name;
            attribute DOMString        standby;
            attribute long             tabIndex;
            attribute DOMString        type;
            attribute DOMString        useMap;
            attribute DOMString        vspace;
            attribute DOMString        width;
};

interface HTMLParamElement : HTMLElement {
            attribute DOMString        name;
            attribute DOMString        type;
            attribute DOMString        value;
            attribute DOMString        valueType;
};

interface HTMLAppletElement : HTMLElement {
            attribute DOMString        align;
            attribute DOMString        alt;
            attribute DOMString        archive;
            attribute DOMString        code;
            attribute DOMString        codeBase;
            attribute DOMString        height;
            attribute DOMString        hspace;
            attribute DOMString        name;
            attribute DOMString        object;
            attribute DOMString        vspace;
            attribute DOMString        width;
};
```

```
interface HTMLMapElement : HTMLElement {
  readonly attribute HTMLCollection   areas;
           attribute DOMString        name;
};

interface HTMLAreaElement : HTMLElement {
           attribute DOMString        accessKey;
           attribute DOMString        alt;
           attribute DOMString        coords;
           attribute DOMString        href;
           attribute boolean          noHref;
           attribute DOMString        shape;
           attribute long             tabIndex;
           attribute DOMString        target;
};

interface HTMLScriptElement : HTMLElement {
           attribute DOMString        text;
           attribute DOMString        htmlFor;
           attribute DOMString        event;
           attribute DOMString        charset;
           attribute boolean          defer;
           attribute DOMString        src;
           attribute DOMString        type;
};

interface HTMLTableElement : HTMLElement {
           attribute HTMLTableCaptionElement  caption;
           attribute HTMLTableSectionElement  tHead;
           attribute HTMLTableSectionElement  tFoot;
  readonly attribute HTMLCollection   rows;
  readonly attribute HTMLCollection   tBodies;
           attribute DOMString        align;
           attribute DOMString        bgColor;
           attribute DOMString        border;
           attribute DOMString        cellPadding;
           attribute DOMString        cellSpacing;
           attribute DOMString        frame;
           attribute DOMString        rules;
           attribute DOMString        summary;
           attribute DOMString        width;
  HTMLElement        createTHead();
  void               deleteTHead();
  HTMLElement        createTFoot();
  void               deleteTFoot();
  HTMLElement        createCaption();
  void               deleteCaption();
  HTMLElement        insertRow(in long index);
  void               deleteRow(in long index);
};

interface HTMLTableCaptionElement : HTMLElement {
           attribute DOMString        align;
};

interface HTMLTableColElement : HTMLElement {
           attribute DOMString        align;
```

```
           attribute DOMString        ch;
           attribute DOMString        chOff;
           attribute long             span;
           attribute DOMString        vAlign;
           attribute DOMString        width;
};

interface HTMLTableSectionElement : HTMLElement {
           attribute DOMString        align;
           attribute DOMString        ch;
           attribute DOMString        chOff;
           attribute DOMString        vAlign;
  readonly attribute HTMLCollection   rows;
  HTMLElement        insertRow(in long index);
  void               deleteRow(in long index);
};

interface HTMLTableRowElement : HTMLElement {
  readonly attribute long             rowIndex;
  readonly attribute long             sectionRowIndex;
  readonly attribute HTMLCollection   cells;
           attribute DOMString        align;
           attribute DOMString        bgColor;
           attribute DOMString        ch;
           attribute DOMString        chOff;
           attribute DOMString        vAlign;
  HTMLElement        insertCell(in long index);
  void               deleteCell(in long index);
};

interface HTMLTableCellElement : HTMLElement {
  readonly attribute long             cellIndex;
           attribute DOMString        abbr;
           attribute DOMString        align;
           attribute DOMString        axis;
           attribute DOMString        bgColor;
           attribute DOMString        ch;
           attribute DOMString        chOff;
           attribute long             colSpan;
           attribute DOMString        headers;
           attribute DOMString        height;
           attribute boolean          noWrap;
           attribute long             rowSpan;
           attribute DOMString        scope;
           attribute DOMString        vAlign;
           attribute DOMString        width;
};

interface HTMLFrameSetElement : HTMLElement {
           attribute DOMString        cols;
           attribute DOMString        rows;
};

interface HTMLFrameElement : HTMLElement {
           attribute DOMString        frameBorder;
           attribute DOMString        longDesc;
           attribute DOMString        marginHeight;
```

```
            attribute DOMString        marginWidth;
            attribute DOMString        name;
            attribute boolean          noResize;
            attribute DOMString        scrolling;
            attribute DOMString        src;
  };

  interface HTMLIFrameElement : HTMLElement {
            attribute DOMString        align;
            attribute DOMString        frameBorder;
            attribute DOMString        height;
            attribute DOMString        longDesc;
            attribute DOMString        marginHeight;
            attribute DOMString        marginWidth;
            attribute DOMString        name;
            attribute DOMString        scrolling;
            attribute DOMString        src;
            attribute DOMString        width;
  };
};

#endif // _HTML_IDL_
```

B.3: Document Object Model Views

views.idl:

```
// File: views.idl
#ifndef _VIEWS_IDL_
#define _VIEWS_IDL_

#include "dom.idl"

#pragma prefix "dom.w3c.org"
module views
{
  interface DocumentView;

  // Introduced in DOM Level 2:
  interface AbstractView {
    readonly attribute DocumentView     document;
  };

  // Introduced in DOM Level 2:
  interface DocumentView {
    readonly attribute AbstractView     defaultView;
  };
};

#endif // _VIEWS_IDL_
```

B.4: Document Object Model Stylesheets

stylesheets.idl:

```
// File: stylesheets.idl
#ifndef _STYLESHEETS_IDL_
#define _STYLESHEETS_IDL_

#include "dom.idl"
#include "html.idl"

#pragma prefix "dom.w3c.org"
module stylesheets
{
  typedef dom::DOMString DOMString;
  typedef dom::Node Node;

  interface MediaList;

  // Introduced in DOM Level 2:
  interface StyleSheet {
    readonly attribute DOMString        type;
             attribute boolean          disabled;
    readonly attribute Node             ownerNode;
    readonly attribute StyleSheet       parentStyleSheet;
    readonly attribute DOMString        href;
    readonly attribute DOMString        title;
    readonly attribute MediaList        media;
  };

  // Introduced in DOM Level 2:
  interface StyleSheetList {
    readonly attribute unsigned long    length;
    StyleSheet          item(in unsigned long index);
  };

  // Introduced in DOM Level 2:
  interface MediaList {
             attribute DOMString        cssText;
                                        // raises(dom::DOMException) on setting

    readonly attribute unsigned long    length;
    DOMString           item(in unsigned long index);
    void                delete(in DOMString oldMedium)
                                        raises(dom::DOMException);
    void                append(in DOMString newMedium)
                                        raises(dom::DOMException);
  };

  interface LinkStyle {
    readonly attribute StyleSheet       sheet;
  };

  // Introduced in DOM Level 2:
  interface DocumentStyle {
```

```
    readonly attribute StyleSheetList   styleSheets;
  };
};

#endif // _STYLESHEETS_IDL_
```

B.5: Document Object Model CSS

css.idl:

```
// File: css.idl
#ifndef _CSS_IDL_
#define _CSS_IDL_

#include "dom.idl"
#include "stylesheets.idl"
#include "html.idl"
#include "views.idl"

#pragma prefix "dom.w3c.org"
module css
{
  typedef dom::DOMString DOMString;
  typedef dom::Element Element;
  typedef dom::DOMImplementation DOMImplementation;

  interface CSSRule;
  interface CSSStyleSheet;
  interface CSSStyleDeclaration;
  interface CSSValue;
  interface Counter;
  interface Rect;
  interface RGBColor;

  exception CSSException {
    unsigned short   code;
  };

  // CSSExceptionCode
  const unsigned short      SYNTAX_ERR                    = 0;
  const unsigned short      INVALID_MODIFICATION_ERR      = 1;


  // Introduced in DOM Level 2:
  interface CSSRuleList {
    readonly attribute unsigned long    length;
    CSSRule             item(in unsigned long index);
  };

  // Introduced in DOM Level 2:
  interface CSSRule {
    // RuleType
    const unsigned short      UNKNOWN_RULE                  = 0;
    const unsigned short      STYLE_RULE                    = 1;
    const unsigned short      CHARSET_RULE                  = 2;
```

```
  const unsigned short      IMPORT_RULE                    = 3;
  const unsigned short      MEDIA_RULE                     = 4;
  const unsigned short      FONT_FACE_RULE                 = 5;
  const unsigned short      PAGE_RULE                      = 6;

  readonly attribute unsigned short   type;
           attribute DOMString        cssText;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

  readonly attribute CSSStyleSheet    parentStyleSheet;
  readonly attribute CSSRule          parentRule;
};

// Introduced in DOM Level 2:
interface CSSStyleRule : CSSRule {
           attribute DOMString        selectorText;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

  readonly attribute CSSStyleDeclaration  style;
};

// Introduced in DOM Level 2:
interface CSSMediaRule : CSSRule {
  readonly attribute stylesheets::MediaList  media;
  readonly attribute CSSRuleList      cssRules;
  unsigned long      insertRule(in DOMString rule,
                                in unsigned long index)
                                      raises(dom::DOMException,
                                             CSSException);
  void               deleteRule(in unsigned long index)
                                      raises(dom::DOMException);
};

// Introduced in DOM Level 2:
interface CSSFontFaceRule : CSSRule {
  readonly attribute CSSStyleDeclaration  style;
};

// Introduced in DOM Level 2:
interface CSSPageRule : CSSRule {
           attribute DOMString        selectorText;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

  readonly attribute CSSStyleDeclaration  style;
};

// Introduced in DOM Level 2:
interface CSSImportRule : CSSRule {
  readonly attribute DOMString        href;
  readonly attribute stylesheets::MediaList  media;
  readonly attribute CSSStyleSheet    styleSheet;
};

// Introduced in DOM Level 2:
```

```
interface CSSCharsetRule : CSSRule {
           attribute DOMString        encoding;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

};

// Introduced in DOM Level 2:
interface CSSUnknownRule : CSSRule {
};

// Introduced in DOM Level 2:
interface CSSStyleDeclaration {
           attribute DOMString        cssText;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

  DOMString          getPropertyValue(in DOMString propertyName);
  CSSValue           getPropertyCSSValue(in DOMString propertyName);
  DOMString          removeProperty(in DOMString propertyName)
                                      raises(dom::DOMException);
  DOMString          getPropertyPriority(in DOMString propertyName);
  void               setProperty(in DOMString propertyName,
                                 in DOMString value,
                                 in DOMString priority)
                                      raises(CSSException,
                                             dom::DOMException);
  readonly attribute unsigned long    length;
  DOMString          item(in unsigned long index);
  readonly attribute CSSRule          parentRule;
};

// Introduced in DOM Level 2:
interface CSSValue {
  // UnitTypes
  const unsigned short      CSS_INHERIT                   = 0;
  const unsigned short      CSS_PRIMITIVE_VALUE           = 1;
  const unsigned short      CSS_VALUE_LIST                = 2;
  const unsigned short      CSS_CUSTOM                    = 3;

           attribute DOMString        cssText;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

  readonly attribute unsigned short   valueType;
};

// Introduced in DOM Level 2:
interface CSSPrimitiveValue : CSSValue {
  // UnitTypes
  const unsigned short      CSS_UNKNOWN                   = 0;
  const unsigned short      CSS_NUMBER                    = 1;
  const unsigned short      CSS_PERCENTAGE                = 2;
  const unsigned short      CSS_EMS                       = 3;
  const unsigned short      CSS_EXS                       = 4;
  const unsigned short      CSS_PX                        = 5;
  const unsigned short      CSS_CM                        = 6;
```

```
  const unsigned short      CSS_MM                          = 9;
  const unsigned short      CSS_IN                          = 10;
  const unsigned short      CSS_PT                          = 11;
  const unsigned short      CSS_PC                          = 12;
  const unsigned short      CSS_DEG                         = 13;
  const unsigned short      CSS_RAD                         = 14;
  const unsigned short      CSS_GRAD                        = 15;
  const unsigned short      CSS_MS                          = 16;
  const unsigned short      CSS_S                           = 17;
  const unsigned short      CSS_HZ                          = 18;
  const unsigned short      CSS_KHZ                         = 19;
  const unsigned short      CSS_DIMENSION                   = 20;
  const unsigned short      CSS_STRING                      = 21;
  const unsigned short      CSS_URI                         = 22;
  const unsigned short      CSS_IDENT                       = 23;
  const unsigned short      CSS_ATTR                        = 24;
  const unsigned short      CSS_COUNTER                     = 25;
  const unsigned short      CSS_RECT                        = 26;
  const unsigned short      CSS_RGBCOLOR                    = 27;

  readonly attribute unsigned short   primitiveType;
  void               setFloatValue(in unsigned short unitType,
                                   in float floatValue)
                                     raises(dom::DOMException);
  float              getFloatValue(in unsigned short unitType)
                                     raises(dom::DOMException);
  void               setStringValue(in unsigned short stringType,
                                    in DOMString stringValue)
                                     raises(dom::DOMException);
  DOMString          getStringValue()
                                     raises(dom::DOMException);
  Counter            getCounterValue()
                                     raises(dom::DOMException);
  Rect               getRectValue()
                                     raises(dom::DOMException);
  RGBColor           getRGBColorValue()
                                     raises(dom::DOMException);
};

// Introduced in DOM Level 2:
interface CSSValueList : CSSValue {
  readonly attribute unsigned long    length;
  CSSValue           item(in unsigned long index);
};

// Introduced in DOM Level 2:
interface RGBColor {
  readonly attribute CSSPrimitiveValue  red;
  readonly attribute CSSPrimitiveValue  green;
  readonly attribute CSSPrimitiveValue  blue;
};

// Introduced in DOM Level 2:
interface Rect {
  readonly attribute CSSPrimitiveValue  top;
  readonly attribute CSSPrimitiveValue  right;
  readonly attribute CSSPrimitiveValue  bottom;
```

```
  readonly attribute CSSPrimitiveValue  left;
};

// Introduced in DOM Level 2:
interface Counter {
  readonly attribute DOMString        identifier;
  readonly attribute DOMString        listStyle;
  readonly attribute DOMString        separator;
};

// Introduced in DOM Level 2:
interface CSS2Azimuth : CSSValue {
  readonly attribute unsigned short   azimuthType;
  readonly attribute DOMString        identifier;
  readonly attribute boolean          behind;
  void                setAngleValue(in unsigned short uType,
                                    in float fValue)
                                       raises(dom::DOMException);
  float               getAngleValue(in unsigned short uType)
                                       raises(dom::DOMException);
  void                setIdentifier(in DOMString ident,
                                    in boolean b)
                                       raises(CSSException,
                                              dom::DOMException);
};

// Introduced in DOM Level 2:
interface CSS2BackgroundPosition : CSSValue {
  readonly attribute unsigned short   horizontalType;
  readonly attribute unsigned short   verticalType;
  readonly attribute DOMString        horizontalIdentifier;
  readonly attribute DOMString        verticalIdentifier;
  float               getHorizontalPosition(in float hType)
                                       raises(dom::DOMException);
  float               getVerticalPosition(in float vType)
                                       raises(dom::DOMException);
  void                setHorizontalPosition(in unsigned short hType,
                                            in float value)
                                       raises(dom::DOMException);
  void                setVerticalPosition(in unsigned short vType,
                                          in float value)
                                       raises(dom::DOMException);
  void                setPositionIdentifier(in DOMString hIdentifier,
                                            in DOMString vIdentifier)
                                       raises(CSSException,
                                              dom::DOMException);
};

// Introduced in DOM Level 2:
interface CSS2BorderSpacing : CSSValue {
  readonly attribute unsigned short   horizontalType;
  readonly attribute unsigned short   verticalType;
  float               getHorizontalSpacing(in float hType)
                                       raises(dom::DOMException);
  float               getVerticalSpacing(in float vType)
                                       raises(dom::DOMException);
  void                setHorizontalSpacing(in unsigned short hType,
```

```
                                        in float value)
                                    raises(dom::DOMException);
  void               setVerticalSpacing(in unsigned short vType,
                                        in float value)
                                    raises(dom::DOMException);
};

// Introduced in DOM Level   2:
interface CSS2CounterReset : CSSValue {
           attribute DOMString        identifier;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

           attribute short            reset;
                                      // raises(dom::DOMException) on setting

};

// Introduced in DOM   Level 2:
interface CSS2CounterIncrement : CSSValue {
           attribute DOMString        identifier;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

           attribute short            increment;
                                      // raises(dom::DOMException) on setting

};

// Introduced in DOM Level 2:
interface CSS2Cursor : CSSValue {
  readonly attribute CSSValueList     uris;
           attribute DOMString        predefinedCursor;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

};

// Introduced in DOM Level 2:
interface CSS2PlayDuring : CSSValue {
  readonly attribute unsigned short   playDuringType;
           attribute DOMString        playDuringIdentifier;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

           attribute DOMString        uri;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

           attribute boolean          mix;
                                      // raises(dom::DOMException) on setting

           attribute boolean          repeat;
                                      // raises(dom::DOMException) on setting

};
```

```
// Introduced in DOM Level 2:
interface CSS2TextShadow {
  readonly attribute CSSValue         color;
  readonly attribute CSSValue         horizontal;
  readonly attribute CSSValue         vertical;
  readonly attribute CSSValue         blur;
};

// Introduced in DOM Level 2:
interface CSS2FontFaceSrc {
           attribute DOMString        uri;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

  readonly attribute CSSValueList     format;
           attribute DOMString        fontFaceName;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

};

// Introduced in DOM Level 2:
interface CSS2FontFaceWidths {
           attribute DOMString        urange;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

  readonly attribute CSSValueList     numbers;
};

// Introduced in DOM Level 2:
interface CSS2PageSize : CSSValue {
  readonly attribute unsigned short   widthType;
  readonly attribute unsigned short   heightType;
  readonly attribute DOMString        identifier;
  float               getWidth(in float wType)
                                      raises(dom::DOMException);
  float               getHeightSize(in float hType)
                                      raises(dom::DOMException);
  void                setWidthSize(in unsigned short wType,
                                   in float value)
                                      raises(dom::DOMException);
  void                setHeightSize(in unsigned short hType,
                                    in float value)
                                      raises(dom::DOMException);
  void                setIdentifier(in DOMString ident)
                                      raises(CSSException,
                                             dom::DOMException);
};

// Introduced in DOM Level 2:
interface CSS2Properties {
           attribute DOMString        azimuth;
                                      // raises(CSSException,
                                      //        dom::DOMException) on setting

           attribute DOMString        background;
```

```
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     backgroundAttachment;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     backgroundColor;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     backgroundImage;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     backgroundPosition;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     backgroundRepeat;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     border;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderCollapse;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderColor;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderSpacing;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderStyle;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderTop;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderRight;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderBottom;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderLeft;
                        // raises(CSSException,
```

```
                        //        dom::DOMException) on setting

attribute DOMString     borderTopColor;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderRightColor;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderBottomColor;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderLeftColor;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderTopStyle;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderRightStyle;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderBottomStyle;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderLeftStyle;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderTopWidth;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderRightWidth;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderBottomWidth;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderLeftWidth;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     borderWidth;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     bottom;
                        // raises(CSSException,
                        //        dom::DOMException) on setting
```

```
attribute DOMString        captionSide;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        clear;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        clip;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        color;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        content;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        counterIncrement;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        counterReset;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        cue;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        cueAfter;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        cueBefore;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        cursor;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        direction;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        display;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        elevation;
                           // raises(CSSException,
                           //        dom::DOMException) on setting
```

```
attribute DOMString        emptyCells;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        cssFloat;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        font;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        fontFamily;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        fontSize;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        fontSizeAdjust;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        fontStretch;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        fontStyle;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        fontVariant;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        fontWeight;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        height;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        left;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        letterSpacing;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        lineHeight;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        listStyle;
```

```
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     listStyleImage;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     listStylePosition;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     listStyleType;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     margin;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     marginTop;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     marginRight;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     marginBottom;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     marginLeft;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     markerOffset;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     marks;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     maxHeight;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     maxWidth;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     minHeight;
                        // raises(CSSException,
                        //        dom::DOMException) on setting

attribute DOMString     minWidth;
                        // raises(CSSException,
```

```
                            //        dom::DOMException) on setting

attribute DOMString         orphans;
                            // raises(CSSException,
                            //        dom::DOMException) on setting

attribute DOMString         outline;
                            // raises(CSSException,
                            //        dom::DOMException) on setting

attribute DOMString         outlineColor;
                            // raises(CSSException,
                            //        dom::DOMException) on setting

attribute DOMString         outlineStyle;
                            // raises(CSSException,
                            //        dom::DOMException) on setting

attribute DOMString         outlineWidth;
                            // raises(CSSException,
                            //        dom::DOMException) on setting

attribute DOMString         overflow;
                            // raises(CSSException,
                            //        dom::DOMException) on setting

attribute DOMString         padding;
                            // raises(CSSException,
                            //        dom::DOMException) on setting

attribute DOMString         paddingTop;
                            // raises(CSSException,
                            //        dom::DOMException) on setting

attribute DOMString         paddingRight;
                            // raises(CSSException,
                            //        dom::DOMException) on setting

attribute DOMString         paddingBottom;
                            // raises(CSSException,
                            //        dom::DOMException) on setting

attribute DOMString         paddingLeft;
                            // raises(CSSException,
                            //        dom::DOMException) on setting

attribute DOMString         page;
                            // raises(CSSException,
                            //        dom::DOMException) on setting

attribute DOMString         pageBreakAfter;
                            // raises(CSSException,
                            //        dom::DOMException) on setting

attribute DOMString         pageBreakBefore;
                            // raises(CSSException,
                            //        dom::DOMException) on setting
```

```
attribute DOMString        pageBreakInside;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        pause;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        pauseAfter;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        pauseBefore;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        pitch;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        pitchRange;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        playDuring;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        position;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        quotes;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        richness;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        right;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        size;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        speak;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        speakHeader;
                           // raises(CSSException,
                           //        dom::DOMException) on setting
```

```
attribute DOMString        speakNumeral;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        speakPunctuation;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        speechRate;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        stress;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        tableLayout;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        textAlign;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        textDecoration;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        textIndent;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        textShadow;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        textTransform;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        top;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        unicodeBidi;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        verticalAlign;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        visibility;
                           // raises(CSSException,
                           //        dom::DOMException) on setting

attribute DOMString        voiceFamily;
```

```
                                    // raises(CSSException,
                                    //        dom::DOMException) on setting

            attribute DOMString     volume;
                                    // raises(CSSException,
                                    //        dom::DOMException) on setting

            attribute DOMString     whiteSpace;
                                    // raises(CSSException,
                                    //        dom::DOMException) on setting

            attribute DOMString     widows;
                                    // raises(CSSException,
                                    //        dom::DOMException) on setting

            attribute DOMString     width;
                                    // raises(CSSException,
                                    //        dom::DOMException) on setting

            attribute DOMString     wordSpacing;
                                    // raises(CSSException,
                                    //        dom::DOMException) on setting

            attribute DOMString     zIndex;
                                    // raises(CSSException,
                                    //        dom::DOMException) on setting

};

// Introduced in DOM Level 2:
interface CSSStyleSheet : stylesheets::StyleSheet {
  readonly attribute CSSRule          ownerRule;
  readonly attribute CSSRuleList      cssRules;
  unsigned long      insertRule(in DOMString rule,
                                in unsigned long index)
                                    raises(dom::DOMException,
                                           CSSException);
  void               deleteRule(in unsigned long index)
                                    raises(dom::DOMException);
};

interface ViewCSS : views::AbstractView {
  CSSStyleDeclaration getComputedStyle(in Element elt,
                                       in DOMString pseudoElt);
};

interface DocumentCSS : stylesheets::DocumentStyle {
  CSSStyleDeclaration getOverrideStyle(in Element elt,
                                       in DOMString pseudoElt);
};

// Introduced in DOM   Level 2:
interface DOMImplementationCSS : DOMImplementation {
  CSSStyleSheet      createCSSStyleSheet(in DOMString title,
                                         inout DOMString media);
};
```

```
  // Introduced in DOM   Level 2:
  interface HTMLElementCSS : html::HTMLElement {
    readonly attribute CSSStyleDeclaration  style;
  };
};

#endif // _CSS_IDL_
```

B.6: Document Object Model Events

events.idl:

```
// File: events.idl
#ifndef _EVENTS_IDL_
#define _EVENTS_IDL_

#include "dom.idl"
#include "views.idl"

#pragma prefix "dom.w3c.org"
module events
{
  typedef dom::DOMString DOMString;
  typedef dom::Node Node;

  interface EventListener;
  interface Event;

  // Introduced in DOM Level 2:
  interface EventTarget {
    void               addEventListener(in DOMString type,
                                        in EventListener listener,
                                        in boolean useCapture);
    void               removeEventListener(in DOMString type,
                                           in EventListener listener,
                                           in boolean useCapture);
    boolean            dispatchEvent(in Event evt)
                                        raises(dom::DOMException);
  };

  // Introduced in DOM Level 2:
  interface EventListener {
    void               handleEvent(in Event evt);
  };

  // Introduced in DOM Level 2:
  interface Event {
    // PhaseType
    const unsigned short      BUBBLING_PHASE               = 1;
    const unsigned short      CAPTURING_PHASE              = 2;
    const unsigned short      AT_TARGET                    = 3;

    readonly attribute DOMString        type;
    readonly attribute EventTarget      target;
    readonly attribute Node             currentNode;
```

```
  readonly attribute unsigned short   eventPhase;
  readonly attribute boolean          bubbles;
  readonly attribute boolean          cancelable;
  void               preventBubble();
  void               preventCapture();
  void               preventDefault();
  void               initEvent(in DOMString eventTypeArg,
                               in boolean canBubbleArg,
                               in boolean cancelableArg);
};

// Introduced in DOM Level 2:
interface DocumentEvent {
  Event              createEvent(in DOMString type)
                                 raises(dom::DOMException);
};

// Introduced in DOM Level 2:
interface UIEvent : Event {
  readonly attribute views::AbstractView  view;
  readonly attribute unsigned short   detail;
  void               initUIEvent(in DOMString typeArg,
                                 in boolean canBubbleArg,
                                 in boolean cancelableArg,
                                 in views::AbstractView viewArg,
                                 in unsigned short detailArg);
};

// Introduced in DOM Level 2:
interface MouseEvent : UIEvent {
  readonly attribute long             screenX;
  readonly attribute long             screenY;
  readonly attribute long             clientX;
  readonly attribute long             clientY;
  readonly attribute boolean          ctrlKey;
  readonly attribute boolean          shiftKey;
  readonly attribute boolean          altKey;
  readonly attribute boolean          metaKey;
  readonly attribute unsigned short   button;
  readonly attribute Node             relatedNode;
  void               initMouseEvent(in DOMString typeArg,
                                    in boolean canBubbleArg,
                                    in boolean cancelableArg,
                                    in views::AbstractView viewArg,
                                    in unsigned short detailArg,
                                    in long screenXArg,
                                    in long screenYArg,
                                    in long clientXArg,
                                    in long clientYArg,
                                    in boolean ctrlKeyArg,
                                    in boolean altKeyArg,
                                    in boolean shiftKeyArg,
                                    in boolean metaKeyArg,
                                    in unsigned short buttonArg,
                                    in Node relatedNodeArg);
};
```

```
// Introduced in DOM Level 2:
interface KeyEvent : UIEvent {
  // VirtualKeyCode
  const unsigned long       CHAR_UNDEFINED                = 0x0FFFF;
  const unsigned long       DOM_VK_0                      = 0x30;
  const unsigned long       DOM_VK_1                      = 0x31;
  const unsigned long       DOM_VK_2                      = 0x32;
  const unsigned long       DOM_VK_3                      = 0x33;
  const unsigned long       DOM_VK_4                      = 0x34;
  const unsigned long       DOM_VK_5                      = 0x35;
  const unsigned long       DOM_VK_6                      = 0x36;
  const unsigned long       DOM_VK_7                      = 0x37;
  const unsigned long       DOM_VK_8                      = 0x38;
  const unsigned long       DOM_VK_9                      = 0x39;
  const unsigned long       DOM_VK_A                      = 0x41;
  const unsigned long       DOM_VK_ACCEPT                 = 0x1E;
  const unsigned long       DOM_VK_ADD                    = 0x6B;
  const unsigned long       DOM_VK_AGAIN                  = 0xFFC9;
  const unsigned long       DOM_VK_ALL_CANDIDATES         = 0x0100;
  const unsigned long       DOM_VK_ALPHANUMERIC           = 0x00F0;
  const unsigned long       DOM_VK_ALT                    = 0x12;
  const unsigned long       DOM_VK_ALT_GRAPH              = 0xFF7E;
  const unsigned long       DOM_VK_AMPERSAND              = 0x96;
  const unsigned long       DOM_VK_ASTERISK               = 0x97;
  const unsigned long       DOM_VK_AT                     = 0x0200;
  const unsigned long       DOM_VK_B                      = 0x42;
  const unsigned long       DOM_VK_BACK_QUOTE             = 0xC0;
  const unsigned long       DOM_VK_BACK_SLASH             = 0x5C;
  const unsigned long       DOM_VK_BACK_SPACE             = 0x08;
  const unsigned long       DOM_VK_BRACELEFT              = 0xA1;
  const unsigned long       DOM_VK_BRACERIGHT             = 0xA2;
  const unsigned long       DOM_VK_C                      = 0x43;
  const unsigned long       DOM_VK_CANCEL                 = 0x03;
  const unsigned long       DOM_VK_CAPS_LOCK              = 0x14;
  const unsigned long       DOM_VK_CIRCUMFLEX             = 0x0202;
  const unsigned long       DOM_VK_CLEAR                  = 0x0C;
  const unsigned long       DOM_VK_CLOSE_BRACKET          = 0x5D;
  const unsigned long       DOM_VK_CODE_INPUT             = 0x0102;
  const unsigned long       DOM_VK_COLON                  = 0x0201;
  const unsigned long       DOM_VK_COMMA                  = 0x2C;
  const unsigned long       DOM_VK_COMPOSE                = 0xFF20;
  const unsigned long       DOM_VK_CONTROL                = 0x11;
  const unsigned long       DOM_VK_CONVERT                = 0x1C;
  const unsigned long       DOM_VK_COPY                   = 0xFFCD;
  const unsigned long       DOM_VK_CUT                    = 0xFFD1;
  const unsigned long       DOM_VK_D                      = 0x44;
  const unsigned long       DOM_VK_DEAD_ABOVEDOT          = 0x86;
  const unsigned long       DOM_VK_DEAD_ABOVERING         = 0x88;
  const unsigned long       DOM_VK_DEAD_ACUTE             = 0x81;
  const unsigned long       DOM_VK_DEAD_BREVE             = 0x85;
  const unsigned long       DOM_VK_DEAD_CARON             = 0x8A;
  const unsigned long       DOM_VK_DEAD_CEDILLA           = 0x8B;
  const unsigned long       DOM_VK_DEAD_CIRCUMFLEX        = 0x82;
  const unsigned long       DOM_VK_DEAD_DIAERESIS         = 0x87;
  const unsigned long       DOM_VK_DEAD_DOUBLEACUTE       = 0x89;
  const unsigned long       DOM_VK_DEAD_GRAVE             = 0x80;
  const unsigned long       DOM_VK_DEAD_IOTA              = 0x8D;
```

```
const unsigned long       DOM_VK_DEAD_MACRON             = 0x84;
const unsigned long       DOM_VK_DEAD_OGONEK             = 0x8C;
const unsigned long       DOM_VK_DEAD_SEMIVOICED_SOUND   = 0x8F;
const unsigned long       DOM_VK_DEAD_TILDE              = 0x83;
const unsigned long       DOM_VK_DEAD_VOICED_SOUND       = 0x8E;
const unsigned long       DOM_VK_DECIMAL                 = 0x6E;
const unsigned long       DOM_VK_DELETE                  = 0x7F;
const unsigned long       DOM_VK_DIVIDE                  = 0x6F;
const unsigned long       DOM_VK_DOLLAR                  = 0x0203;
const unsigned long       DOM_VK_DOWN                    = 0x28;
const unsigned long       DOM_VK_E                       = 0x45;
const unsigned long       DOM_VK_END                     = 0x23;
const unsigned long       DOM_VK_ENTER                   = 0x0D;
const unsigned long       DOM_VK_EQUALS                  = 0x3D;
const unsigned long       DOM_VK_ESCAPE                  = 0x1B;
const unsigned long       DOM_VK_EURO_SIGN               = 0x0204;
const unsigned long       DOM_VK_EXCLAMATION_MARK        = 0x0205;
const unsigned long       DOM_VK_F                       = 0x46;
const unsigned long       DOM_VK_F1                      = 0x70;
const unsigned long       DOM_VK_F10                     = 0x79;
const unsigned long       DOM_VK_F11                     = 0x7A;
const unsigned long       DOM_VK_F12                     = 0x7B;
const unsigned long       DOM_VK_F13                     = 0xF000;
const unsigned long       DOM_VK_F14                     = 0xF001;
const unsigned long       DOM_VK_F15                     = 0xF002;
const unsigned long       DOM_VK_F16                     = 0xF003;
const unsigned long       DOM_VK_F17                     = 0xF004;
const unsigned long       DOM_VK_F18                     = 0xF005;
const unsigned long       DOM_VK_F19                     = 0xF006;
const unsigned long       DOM_VK_F2                      = 0x71;
const unsigned long       DOM_VK_F20                     = 0xF007;
const unsigned long       DOM_VK_F21                     = 0xF008;
const unsigned long       DOM_VK_F22                     = 0xF009;
const unsigned long       DOM_VK_F23                     = 0xF00A;
const unsigned long       DOM_VK_F24                     = 0xF00B;
const unsigned long       DOM_VK_F3                      = 0x72;
const unsigned long       DOM_VK_F4                      = 0x73;
const unsigned long       DOM_VK_F5                      = 0x74;
const unsigned long       DOM_VK_F6                      = 0x75;
const unsigned long       DOM_VK_F7                      = 0x76;
const unsigned long       DOM_VK_F8                      = 0x77;
const unsigned long       DOM_VK_F9                      = 0x78;
const unsigned long       DOM_VK_FINAL                   = 0x18;
const unsigned long       DOM_VK_FIND                    = 0xFFD0;
const unsigned long       DOM_VK_FULL_WIDTH              = 0x00F3;
const unsigned long       DOM_VK_G                       = 0x47;
const unsigned long       DOM_VK_GREATER                 = 0xA0;
const unsigned long       DOM_VK_H                       = 0x48;
const unsigned long       DOM_VK_HALF_WIDTH              = 0x00F4;
const unsigned long       DOM_VK_HELP                    = 0x9C;
const unsigned long       DOM_VK_HIRAGANA                = 0x00F2;
const unsigned long       DOM_VK_HOME                    = 0x24;
const unsigned long       DOM_VK_I                       = 0x49;
const unsigned long       DOM_VK_INSERT                  = 0x9B;
const unsigned long       DOM_VK_INVERTED_EXCLAMATION_MARK = 0x0206;
const unsigned long       DOM_VK_J                       = 0x4A;
const unsigned long       DOM_VK_JAPANESE_HIRAGANA       = 0x0104;
```

```
const unsigned long       DOM_VK_JAPANESE_KATAKANA       = 0x0103;
const unsigned long       DOM_VK_JAPANESE_ROMAN          = 0x0105;
const unsigned long       DOM_VK_K                       = 0x4B;
const unsigned long       DOM_VK_KANA                    = 0x15;
const unsigned long       DOM_VK_KANJI                   = 0x19;
const unsigned long       DOM_VK_KATAKANA                = 0x00F1;
const unsigned long       DOM_VK_KP_DOWN                 = 0xE1;
const unsigned long       DOM_VK_KP_LEFT                 = 0xE2;
const unsigned long       DOM_VK_KP_RIGHT                = 0xE3;
const unsigned long       DOM_VK_KP_UP                   = 0xE0;
const unsigned long       DOM_VK_L                       = 0x4C;
const unsigned long       DOM_VK_LEFT                    = 0x25;
const unsigned long       DOM_VK_LEFT_PARENTHESIS        = 0x0207;
const unsigned long       DOM_VK_LESS                    = 0x99;
const unsigned long       DOM_VK_M                       = 0x4D;
const unsigned long       DOM_VK_META                    = 0x9D;
const unsigned long       DOM_VK_MINUS                   = 0x2D;
const unsigned long       DOM_VK_MODECHANGE              = 0x1F;
const unsigned long       DOM_VK_MULTIPLY                = 0x6A;
const unsigned long       DOM_VK_N                       = 0x4E;
const unsigned long       DOM_VK_NONCONVERT              = 0x1D;
const unsigned long       DOM_VK_NUM_LOCK                = 0x90;
const unsigned long       DOM_VK_NUMBER_SIGN             = 0x0208;
const unsigned long       DOM_VK_NUMPAD0                 = 0x60;
const unsigned long       DOM_VK_NUMPAD1                 = 0x61;
const unsigned long       DOM_VK_NUMPAD2                 = 0x62;
const unsigned long       DOM_VK_NUMPAD3                 = 0x63;
const unsigned long       DOM_VK_NUMPAD4                 = 0x64;
const unsigned long       DOM_VK_NUMPAD5                 = 0x65;
const unsigned long       DOM_VK_NUMPAD6                 = 0x66;
const unsigned long       DOM_VK_NUMPAD7                 = 0x67;
const unsigned long       DOM_VK_NUMPAD8                 = 0x68;
const unsigned long       DOM_VK_NUMPAD9                 = 0x69;
const unsigned long       DOM_VK_O                       = 0x4F;
const unsigned long       DOM_VK_OPEN_BRACKET            = 0x5B;
const unsigned long       DOM_VK_P                       = 0x50;
const unsigned long       DOM_VK_PAGE_DOWN               = 0x22;
const unsigned long       DOM_VK_PAGE_UP                 = 0x21;
const unsigned long       DOM_VK_PASTE                   = 0xFFCF;
const unsigned long       DOM_VK_PAUSE                   = 0x13;
const unsigned long       DOM_VK_PERIOD                  = 0x2E;
const unsigned long       DOM_VK_PLUS                    = 0x0209;
const unsigned long       DOM_VK_PREVIOUS_CANDIDATE      = 0x0101;
const unsigned long       DOM_VK_PRINTSCREEN             = 0x9A;
const unsigned long       DOM_VK_PROPS                   = 0xFFCA;
const unsigned long       DOM_VK_Q                       = 0x51;
const unsigned long       DOM_VK_QUOTE                   = 0xDE;
const unsigned long       DOM_VK_QUOTEDBL                = 0x98;
const unsigned long       DOM_VK_R                       = 0x52;
const unsigned long       DOM_VK_RIGHT                   = 0x27;
const unsigned long       DOM_VK_RIGHT_PARENTHESIS       = 0x020A;
const unsigned long       DOM_VK_ROMAN_CHARACTERS        = 0x00F5;
const unsigned long       DOM_VK_S                       = 0x53;
const unsigned long       DOM_VK_SCROLL_LOCK             = 0x91;
const unsigned long       DOM_VK_SEMICOLON               = 0x3B;
const unsigned long       DOM_VK_SEPARATER               = 0x6C;
const unsigned long       DOM_VK_SHIFT                   = 0x10;
```

```
    const unsigned long       DOM_VK_SLASH                    = 0x2F;
    const unsigned long       DOM_VK_SPACE                    = 0x20;
    const unsigned long       DOM_VK_STOP                     = 0xFFC8;
    const unsigned long       DOM_VK_SUBTRACT                 = 0x6D;
    const unsigned long       DOM_VK_T                        = 0x54;
    const unsigned long       DOM_VK_TAB                      = 0x09;
    const unsigned long       DOM_VK_U                        = 0x55;
    const unsigned long       DOM_VK_UNDEFINED                = 0x0;
    const unsigned long       DOM_VK_UNDERSCORE               = 0x020B;
    const unsigned long       DOM_VK_UNDO                     = 0xFFCB;
    const unsigned long       DOM_VK_UP                       = 0x26;
    const unsigned long       DOM_VK_V                        = 0x56;
    const unsigned long       DOM_VK_W                        = 0x57;
    const unsigned long       DOM_VK_X                        = 0x58;
    const unsigned long       DOM_VK_Y                        = 0x59;
    const unsigned long       DOM_VK_Z                        = 0x5A;

    readonly attribute boolean          ctrlKey;
    readonly attribute boolean          shiftKey;
    readonly attribute boolean          altKey;
    readonly attribute boolean          metaKey;
    readonly attribute unsigned long    keyCode;
    readonly attribute unsigned long    charCode;
    void               initKeyEvent(in DOMString typeArg,
                                    in boolean canBubbleArg,
                                    in boolean cancelableArg,
                                    in boolean ctrlKeyArg,
                                    in boolean altKeyArg,
                                    in boolean shiftKeyArg,
                                    in boolean metaKeyArg,
                                    in unsigned long keyCodeArg,
                                    in unsigned long charCodeArg,
                                    in views::AbstractView viewArg);
  };

  // Introduced in DOM Level 2:
  interface MutationEvent : Event {
    readonly attribute Node             relatedNode;
    readonly attribute DOMString        prevValue;
    readonly attribute DOMString        newValue;
    readonly attribute DOMString        attrName;
    void               initMutationEvent(in DOMString typeArg,
                                         in boolean canBubbleArg,
                                         in boolean cancelableArg,
                                         in Node relatedNodeArg,
                                         in DOMString prevValueArg,
                                         in DOMString newValueArg,
                                         in DOMString attrNameArg);
  };
};

#endif // _EVENTS_IDL_
```

B.7: Document Object Model Traversal

traversal.idl:

```
// File: traversal.idl
#ifndef _TRAVERSAL_IDL_
#define _TRAVERSAL_IDL_

#include "dom.idl"

#pragma prefix "dom.w3c.org"
module traversal
{
  typedef dom::Node Node;

  interface NodeFilter;

  // Introduced in DOM Level 2:
  interface NodeIterator {
    readonly attribute long             whatToShow;
    // Constants for whatToShow
    const unsigned long       SHOW_ALL                      = 0x0000FFFF;
    const unsigned long       SHOW_ELEMENT                  = 0x00000001;
    const unsigned long       SHOW_ATTRIBUTE                = 0x00000002;
    const unsigned long       SHOW_TEXT                     = 0x00000004;
    const unsigned long       SHOW_CDATA_SECTION            = 0x00000008;
    const unsigned long       SHOW_ENTITY_REFERENCE         = 0x00000010;
    const unsigned long       SHOW_ENTITY                   = 0x00000020;
    const unsigned long       SHOW_PROCESSING_INSTRUCTION   = 0x00000040;
    const unsigned long       SHOW_COMMENT                  = 0x00000080;
    const unsigned long       SHOW_DOCUMENT                 = 0x00000100;
    const unsigned long       SHOW_DOCUMENT_TYPE            = 0x00000200;
    const unsigned long       SHOW_DOCUMENT_FRAGMENT        = 0x00000400;
    const unsigned long       SHOW_NOTATION                 = 0x00000800;

    readonly attribute NodeFilter       filter;
    readonly attribute boolean          expandEntityReferences;
    Node               nextNode();
    Node               previousNode();
  };

  // Introduced in DOM Level 2:
  interface NodeFilter {
    // Constants returned by acceptNode
    const short               FILTER_ACCEPT                 = 1;
    const short               FILTER_REJECT                 = 2;
    const short               FILTER_SKIP                   = 3;

    short              acceptNode(in Node n);
  };

  // Introduced in DOM Level 2:
  interface TreeWalker {
    readonly attribute long             whatToShow;
    // Constants for whatToShow
```

```
    const unsigned long       SHOW_ALL                      = 0x0000FFFF;
    const unsigned long       SHOW_ELEMENT                  = 0x00000001;
    const unsigned long       SHOW_ATTRIBUTE                = 0x00000002;
    const unsigned long       SHOW_TEXT                     = 0x00000004;
    const unsigned long       SHOW_CDATA_SECTION            = 0x00000008;
    const unsigned long       SHOW_ENTITY_REFERENCE         = 0x00000010;
    const unsigned long       SHOW_ENTITY                   = 0x00000020;
    const unsigned long       SHOW_PROCESSING_INSTRUCTION   = 0x00000040;
    const unsigned long       SHOW_COMMENT                  = 0x00000080;
    const unsigned long       SHOW_DOCUMENT                 = 0x00000100;
    const unsigned long       SHOW_DOCUMENT_TYPE            = 0x00000200;
    const unsigned long       SHOW_DOCUMENT_FRAGMENT        = 0x00000400;
    const unsigned long       SHOW_NOTATION                 = 0x00000800;

    readonly attribute NodeFilter       filter;
    readonly attribute boolean          expandEntityReferences;
             attribute Node             currentNode;
    Node               parentNode();
    Node               firstChild();
    Node               lastChild();
    Node               previousSibling();
    Node               nextSibling();
    Node               previousNode();
    Node               nextNode();
  };

  // Introduced in DOM Level 2:
  interface DocumentTraversal {
    NodeIterator       createNodeIterator(in Node root,
                                          in long whatToShow,
                                          in NodeFilter filter,
                                          in boolean entityReferenceExpansion);
    TreeWalker         createTreeWalker(in Node root,
                                        in long whatToShow,
                                        in NodeFilter filter,
                                        in boolean entityReferenceExpansion)
                                        raises(dom::DOMException);
  };
};

#endif // _TRAVERSAL_IDL_
```

B.8: Document Object Model Range

range.idl:

```
// File: range.idl
#ifndef _RANGE_IDL_
#define _RANGE_IDL_

#include "dom.idl"

#pragma prefix "dom.w3c.org"
module range
{
```

```
typedef dom::Node Node;
typedef dom::DocumentFragment DocumentFragment;
typedef dom::DOMString DOMString;

// Introduced in DOM Level 2:
exception RangeException {
  unsigned short   code;
};

// RangeExceptionCode
const unsigned short      BAD_ENDPOINTS_ERR             = 201;
const unsigned short      INVALID_NODE_TYPE_ERR         = 202;
const unsigned short      NULL_NODE_ERR                 = 203;


// Introduced in DOM Level 2:
interface Range {
  readonly attribute Node             startContainer;
  readonly attribute long             startOffset;
  readonly attribute Node             endContainer;
  readonly attribute long             endOffset;
  readonly attribute boolean          isCollapsed;
  readonly attribute Node             commonAncestorContainer;
  void               setStart(in Node refNode,
                              in long offset)
                                      raises(RangeException);
  void               setEnd(in Node refNode,
                            in long offset)
                                      raises(RangeException);
  void               setStartBefore(in Node refNode)
                                      raises(RangeException);
  void               setStartAfter(in Node refNode)
                                      raises(RangeException);
  void               setEndBefore(in Node refNode)
                                      raises(RangeException);
  void               setEndAfter(in Node refNode)
                                      raises(RangeException);
  void               collapse(in boolean toStart);
  void               selectNode(in Node refNode)
                                      raises(RangeException);
  void               selectNodeContents(in Node refNode)
                                      raises(RangeException);

  typedef enum CompareHow_ {
    StartToStart,
    StartToEnd,
    EndToEnd,
    EndToStart
  } CompareHow;
  short              compareEndPoints(in CompareHow how,
                                      in Range sourceRange)
                                      raises(dom::DOMException);
  void               deleteContents()
                                      raises(dom::DOMException);
  DocumentFragment   extractContents()
                                      raises(dom::DOMException);
  DocumentFragment   cloneContents()
```

```
                                        raises(dom::DOMException);
    void                insertNode(in Node newNode)
                                        raises(dom::DOMException,
                                               RangeException);
    void                surroundContents(in Node newParent)
                                        raises(dom::DOMException,
                                               RangeException);
    Range               cloneRange();
    DOMString           toString();
  };

  // Introduced in DOM Level 2:
  interface DocumentRange {
    Range               createRange();
  };
};

#endif // _RANGE_IDL_
```

Appendix C: Java Language Binding

This appendix contains the complete Java bindings for the Level 2 Document Object Model. The definitions are divided into Core [p.331] , HTML [p.337] , Stylesheets [p.356] , CSS [p.357] , Events [p.374] , Filters and Iterators [p.380] , and Range [p.382] .

The Java files are also available as
http://www.w3.org/TR/1999/WD-DOM-Level-2-19990923/java-binding.zip

C.1: Document Object Model Core

org/w3c/dom/DOMException.java:

```
package org.w3c.dom;

public abstract class DOMException extends RuntimeException {
  public DOMException(short code, String message) {
     super(message);
     this.code = code;
  }
  public short   code;
  // ExceptionCode
  public static final short           INDEX_SIZE_ERR       = 1;
  public static final short           DOMSTRING_SIZE_ERR   = 2;
  public static final short           HIERARCHY_REQUEST_ERR = 3;
  public static final short           WRONG_DOCUMENT_ERR   = 4;
  public static final short           INVALID_CHARACTER_ERR = 5;
  public static final short           NO_DATA_ALLOWED_ERR  = 6;
  public static final short           NO_MODIFICATION_ALLOWED_ERR = 7;
  public static final short           NOT_FOUND_ERR        = 8;
  public static final short           NOT_SUPPORTED_ERR    = 9;
  public static final short           INUSE_ATTRIBUTE_ERR  = 10;

}
```

org/w3c/dom/DOMImplementation.java:

```
package org.w3c.dom;

public interface DOMImplementation {
  public boolean            hasFeature(String feature,
                                       String version);
  public DocumentType       createDocumentType(String qualifiedName,
                                               String publicID,
                                               String systemID);
  public Document           createDocument(String namespaceURI,
                                           String qualifiedName,
                                           DocumentType doctype)
                                           throws DOMException;
}
```

org/w3c/dom/DocumentFragment.java:

```
package org.w3c.dom;

public interface DocumentFragment extends Node {
}
```

org/w3c/dom/Document.java:

```
package org.w3c.dom;

public interface Document extends Node {
  public DocumentType       getDoctype();
  public DOMImplementation  getImplementation();
  public Element            getDocumentElement();
  public Element            createElement(String tagName)
                                       throws DOMException;
  public DocumentFragment   createDocumentFragment();
  public Text               createTextNode(String data);
  public Comment            createComment(String data);
  public CDATASection       createCDATASection(String data)
                                         throws DOMException;
  public ProcessingInstruction createProcessingInstruction(String target,
                                                            String data)
                                                            throws DOMException;
  public Attr               createAttribute(String name)
                                       throws DOMException;
  public EntityReference    createEntityReference(String name)
                                          throws DOMException;
  public NodeList           getElementsByTagName(String tagname);
  public Node               importNode(Node importedNode,
                                       boolean deep)
                                       throws DOMException;
  public Element            createElementNS(String namespaceURI,
                                        String qualifiedName)
                                        throws DOMException;
  public Attr               createAttributeNS(String namespaceURI,
                                          String qualifiedName)
                                          throws DOMException;
  public NodeList           getElementsByTagNameNS(String namespaceURI,
                                           String localName);
}
```

org/w3c/dom/Node.java:

```
package org.w3c.dom;

public interface Node {
  // NodeType
  public static final short           ELEMENT_NODE         = 1;
  public static final short           ATTRIBUTE_NODE       = 2;
  public static final short           TEXT_NODE            = 3;
  public static final short           CDATA_SECTION_NODE   = 4;
  public static final short           ENTITY_REFERENCE_NODE = 5;
  public static final short           ENTITY_NODE          = 6;
```

```
  public static final short           PROCESSING_INSTRUCTION_NODE = 7;
  public static final short           COMMENT_NODE         = 8;
  public static final short           DOCUMENT_NODE        = 9;
  public static final short           DOCUMENT_TYPE_NODE   = 10;
  public static final short           DOCUMENT_FRAGMENT_NODE = 11;
  public static final short           NOTATION_NODE        = 12;

  public String             getNodeName();
  public String             getNodeValue()
                                               throws DOMException;
  public void               setNodeValue(String nodeValue)
                                               throws DOMException;
  public short              getNodeType();
  public Node               getParentNode();
  public NodeList           getChildNodes();
  public Node               getFirstChild();
  public Node               getLastChild();
  public Node               getPreviousSibling();
  public Node               getNextSibling();
  public NamedNodeMap       getAttributes();
  public Document           getOwnerDocument();
  public Node               insertBefore(Node newChild,
                                         Node refChild)
                                         throws DOMException;
  public Node               replaceChild(Node newChild,
                                         Node oldChild)
                                         throws DOMException;
  public Node               removeChild(Node oldChild)
                                        throws DOMException;
  public Node               appendChild(Node newChild)
                                        throws DOMException;
  public boolean            hasChildNodes();
  public Node               cloneNode(boolean deep);
  public boolean            supports(String feature,
                                     String version);
  public String             getNamespaceURI();
  public String             getPrefix();
  public void               setPrefix(String prefix)
                                     throws DOMException;
  public String             getLocalName();
}
```

org/w3c/dom/NodeList.java:

```
package org.w3c.dom;

public interface NodeList {
  public Node               item(int index);
  public int                getLength();
}
```

org/w3c/dom/NamedNodeMap.java:

```
package org.w3c.dom;

public interface NamedNodeMap {
  public Node               getNamedItem(String name);
  public Node               setNamedItem(Node arg)
                                    throws DOMException;
  public Node               removeNamedItem(String name)
                                     throws DOMException;
  public Node               item(int index);
  public int                getLength();
  public Node               getNamedItemNS(String namespaceURI,
                                   String localName);
  public Node               removeNamedItemNS(String namespaceURI,
                                     String name)
                                     throws DOMException;
}
```

org/w3c/dom/CharacterData.java:

```
package org.w3c.dom;

public interface CharacterData extends Node {
  public String             getData()
                                     throws DOMException;
  public void               setData(String data)
                                     throws DOMException;
  public int                getLength();
  public String             substringData(int offset,
                                  int count)
                                  throws DOMException;
  public void               appendData(String arg)
                                throws DOMException;
  public void               insertData(int offset,
                                String arg)
                                throws DOMException;
  public void               deleteData(int offset,
                                int count)
                                throws DOMException;
  public void               replaceData(int offset,
                                 int count,
                                 String arg)
                                 throws DOMException;
}
```

org/w3c/dom/Attr.java:

```
package org.w3c.dom;

public interface Attr extends Node {
  public String             getName();
  public boolean            getSpecified();
  public String             getValue();
```

```
  public void               setValue(String value)
                                     throws DOMException;
  public Element            getOwnerElement();
}
```

org/w3c/dom/Element.java:

```
package org.w3c.dom;

public interface Element extends Node {
  public String             getTagName();
  public String             getAttribute(String name);
  public void               setAttribute(String name,
                                         String value)
                                         throws DOMException;
  public void               removeAttribute(String name)
                                           throws DOMException;
  public Attr               getAttributeNode(String name);
  public Attr               setAttributeNode(Attr newAttr)
                                            throws DOMException;
  public Attr               removeAttributeNode(Attr oldAttr)
                                              throws DOMException;
  public NodeList           getElementsByTagName(String name);
  public void               normalize();
  public String             getAttributeNS(String namespaceURI,
                                           String localName);
  public void               setAttributeNS(String namespaceURI,
                                           String localName,
                                           String value)
                                           throws DOMException;
  public void               removeAttributeNS(String namespacURI,
                                              String localName)
                                              throws DOMException;
  public Attr               getAttributeNodeNS(String namespaceURI,
                                               String localName);
  public Attr               setAttributeNodeNS(Attr newAttr)
                                               throws DOMException;
  public NodeList           getElementsByTagNameNS(String namespaceURI,
                                                   String localName);
}
```

org/w3c/dom/Text.java:

```
package org.w3c.dom;

public interface Text extends CharacterData {
  public Text               splitText(int offset)
                                      throws DOMException;
}
```

org/w3c/dom/Comment.java:

```
package org.w3c.dom;

public interface Comment extends CharacterData {
}
```

org/w3c/dom/CDATASection.java:

```
package org.w3c.dom;

public interface CDATASection extends Text {
}
```

org/w3c/dom/DocumentType.java:

```
package org.w3c.dom;

public interface DocumentType extends Node {
  public String             getName();
  public NamedNodeMap       getEntities();
  public NamedNodeMap       getNotations();
  public String             getPublicID();
  public String             getSystemID();
}
```

org/w3c/dom/Notation.java:

```
package org.w3c.dom;

public interface Notation extends Node {
  public String             getPublicId();
  public String             getSystemId();
}
```

org/w3c/dom/Entity.java:

```
package org.w3c.dom;

public interface Entity extends Node {
  public String             getPublicId();
  public String             getSystemId();
  public String             getNotationName();
}
```

org/w3c/dom/EntityReference.java:

```
package org.w3c.dom;

public interface EntityReference extends Node {
}
```

org/w3c/dom/ProcessingInstruction.java:

```
package org.w3c.dom;

public interface ProcessingInstruction extends Node {
  public String             getTarget();
  public String             getData();
  public void               setData(String data)
                                    throws DOMException;
}
```

C.2: Document Object Model HTML

org/w3c/dom/html/HTMLDOMImplementation.java:

```
package org.w3c.dom.html;

import org.w3c.dom.DOMImplementation;

public interface HTMLDOMImplementation extends DOMImplementation {
  public HTMLDocument       createHTMLDocument(String title);
}
```

org/w3c/dom/html/HTMLCollection.java:

```
package org.w3c.dom.html;

import org.w3c.dom.Node;

public interface HTMLCollection {
  public int                getLength();
  public Node               item(int index);
  public Node               namedItem(String name);
}
```

org/w3c/dom/html/HTMLDocument.java:

```
package org.w3c.dom.html;

import org.w3c.dom.Document;
import org.w3c.dom.Element;
import org.w3c.dom.NodeList;

public interface HTMLDocument extends Document {
  public String             getTitle();
  public void               setTitle(String title);
  public String             getReferrer();
  public String             getDomain();
  public String             getURL();
  public HTMLElement        getBody();
  public void               setBody(HTMLElement body);
  public HTMLCollection     getImages();
  public HTMLCollection     getApplets();
```

```
  public HTMLCollection     getLinks();
  public HTMLCollection     getForms();
  public HTMLCollection     getAnchors();
  public String             getCookie();
  public void               setCookie(String cookie);
  public void               open();
  public void               close();
  public void               write(String text);
  public void               writeln(String text);
  public Element            getElementById(String elementId);
  public NodeList           getElementsByName(String elementName);
}
```

org/w3c/dom/html/HTMLElement.java:

```
package org.w3c.dom.html;

import org.w3c.dom.Element;

public interface HTMLElement extends Element {
  public String             getId();
  public void               setId(String id);
  public String             getTitle();
  public void               setTitle(String title);
  public String             getLang();
  public void               setLang(String lang);
  public String             getDir();
  public void               setDir(String dir);
  public String             getClassName();
  public void               setClassName(String className);
}
```

org/w3c/dom/html/HTMLHtmlElement.java:

```
package org.w3c.dom.html;

public interface HTMLHtmlElement extends HTMLElement {
  public String             getVersion();
  public void               setVersion(String version);
}
```

org/w3c/dom/html/HTMLHeadElement.java:

```
package org.w3c.dom.html;

public interface HTMLHeadElement extends HTMLElement {
  public String             getProfile();
  public void               setProfile(String profile);
}
```

org/w3c/dom/html/HTMLLinkElement.java:

```
package org.w3c.dom.html;

public interface HTMLLinkElement extends HTMLElement {
  public boolean            getDisabled();
  public void               setDisabled(boolean disabled);
  public String             getCharset();
  public void               setCharset(String charset);
  public String             getHref();
  public void               setHref(String href);
  public String             getHreflang();
  public void               setHreflang(String hreflang);
  public String             getMedia();
  public void               setMedia(String media);
  public String             getRel();
  public void               setRel(String rel);
  public String             getRev();
  public void               setRev(String rev);
  public String             getTarget();
  public void               setTarget(String target);
  public String             getType();
  public void               setType(String type);
}
```

org/w3c/dom/html/HTMLTitleElement.java:

```
package org.w3c.dom.html;

public interface HTMLTitleElement extends HTMLElement {
  public String             getText();
  public void               setText(String text);
}
```

org/w3c/dom/html/HTMLMetaElement.java:

```
package org.w3c.dom.html;

public interface HTMLMetaElement extends HTMLElement {
  public String             getContent();
  public void               setContent(String content);
  public String             getHttpEquiv();
  public void               setHttpEquiv(String httpEquiv);
  public String             getName();
  public void               setName(String name);
  public String             getScheme();
  public void               setScheme(String scheme);
}
```

org/w3c/dom/html/HTMLBaseElement.java:

```
package org.w3c.dom.html;

public interface HTMLBaseElement extends HTMLElement {
  public String             getHref();
  public void               setHref(String href);
  public String             getTarget();
  public void               setTarget(String target);
}
```

org/w3c/dom/html/HTMLIsIndexElement.java:

```
package org.w3c.dom.html;

public interface HTMLIsIndexElement extends HTMLElement {
  public HTMLFormElement    getForm();
  public String             getPrompt();
  public void               setPrompt(String prompt);
}
```

org/w3c/dom/html/HTMLStyleElement.java:

```
package org.w3c.dom.html;

public interface HTMLStyleElement extends HTMLElement {
  public boolean            getDisabled();
  public void               setDisabled(boolean disabled);
  public String             getMedia();
  public void               setMedia(String media);
  public String             getType();
  public void               setType(String type);
}
```

org/w3c/dom/html/HTMLBodyElement.java:

```
package org.w3c.dom.html;

public interface HTMLBodyElement extends HTMLElement {
  public String             getALink();
  public void               setALink(String aLink);
  public String             getBackground();
  public void               setBackground(String background);
  public String             getBgColor();
  public void               setBgColor(String bgColor);
  public String             getLink();
  public void               setLink(String link);
  public String             getText();
  public void               setText(String text);
  public String             getVLink();
  public void               setVLink(String vLink);
}
```

org/w3c/dom/html/HTMLFormElement.java:

```
package org.w3c.dom.html;

public interface HTMLFormElement extends HTMLElement {
  public HTMLCollection     getElements();
  public int                getLength();
  public String             getName();
  public void               setName(String name);
  public String             getAcceptCharset();
  public void               setAcceptCharset(String acceptCharset);
  public String             getAction();
  public void               setAction(String action);
  public String             getEnctype();
  public void               setEnctype(String enctype);
  public String             getMethod();
  public void               setMethod(String method);
  public String             getTarget();
  public void               setTarget(String target);
  public void               submit();
  public void               reset();
}
```

org/w3c/dom/html/HTMLSelectElement.java:

```
package org.w3c.dom.html;

public interface HTMLSelectElement extends HTMLElement {
  public String             getType();
  public int                getSelectedIndex();
  public void               setSelectedIndex(int selectedIndex);
  public String             getValue();
  public void               setValue(String value);
  public int                getLength();
  public HTMLFormElement    getForm();
  public HTMLCollection     getOptions();
  public boolean            getDisabled();
  public void               setDisabled(boolean disabled);
  public boolean            getMultiple();
  public void               setMultiple(boolean multiple);
  public String             getName();
  public void               setName(String name);
  public int                getSize();
  public void               setSize(int size);
  public int                getTabIndex();
  public void               setTabIndex(int tabIndex);
  public void               add(HTMLElement element,
                                HTMLElement before);
  public void               remove(int index);
  public void               blur();
  public void               focus();
}
```

org/w3c/dom/html/HTMLOptGroupElement.java:

```
package org.w3c.dom.html;

public interface HTMLOptGroupElement extends HTMLElement {
  public boolean            getDisabled();
  public void               setDisabled(boolean disabled);
  public String             getLabel();
  public void               setLabel(String label);
}
```

org/w3c/dom/html/HTMLOptionElement.java:

```
package org.w3c.dom.html;

public interface HTMLOptionElement extends HTMLElement {
  public HTMLFormElement    getForm();
  public boolean            getDefaultSelected();
  public void               setDefaultSelected(boolean defaultSelected);
  public String             getText();
  public int                getIndex();
  public boolean            getDisabled();
  public void               setDisabled(boolean disabled);
  public String             getLabel();
  public void               setLabel(String label);
  public boolean            getSelected();
  public void               setSelected(boolean selected);
  public String             getValue();
  public void               setValue(String value);
}
```

org/w3c/dom/html/HTMLInputElement.java:

```
package org.w3c.dom.html;

public interface HTMLInputElement extends HTMLElement {
  public String             getDefaultValue();
  public void               setDefaultValue(String defaultValue);
  public boolean            getDefaultChecked();
  public void               setDefaultChecked(boolean defaultChecked);
  public HTMLFormElement    getForm();
  public String             getAccept();
  public void               setAccept(String accept);
  public String             getAccessKey();
  public void               setAccessKey(String accessKey);
  public String             getAlign();
  public void               setAlign(String align);
  public String             getAlt();
  public void               setAlt(String alt);
  public boolean            getChecked();
  public void               setChecked(boolean checked);
  public boolean            getDisabled();
  public void               setDisabled(boolean disabled);
  public int                getMaxLength();
  public void               setMaxLength(int maxLength);
```

```
  public String             getName();
  public void               setName(String name);
  public boolean            getReadOnly();
  public void               setReadOnly(boolean readOnly);
  public String             getSize();
  public void               setSize(String size);
  public String             getSrc();
  public void               setSrc(String src);
  public int                getTabIndex();
  public void               setTabIndex(int tabIndex);
  public String             getType();
  public String             getUseMap();
  public void               setUseMap(String useMap);
  public String             getValue();
  public void               setValue(String value);
  public void               blur();
  public void               focus();
  public void               select();
  public void               click();
}
```

org/w3c/dom/html/HTMLTextAreaElement.java:

```
package org.w3c.dom.html;

public interface HTMLTextAreaElement extends HTMLElement {
  public String             getDefaultValue();
  public void               setDefaultValue(String defaultValue);
  public HTMLFormElement    getForm();
  public String             getAccessKey();
  public void               setAccessKey(String accessKey);
  public int                getCols();
  public void               setCols(int cols);
  public boolean            getDisabled();
  public void               setDisabled(boolean disabled);
  public String             getName();
  public void               setName(String name);
  public boolean            getReadOnly();
  public void               setReadOnly(boolean readOnly);
  public int                getRows();
  public void               setRows(int rows);
  public int                getTabIndex();
  public void               setTabIndex(int tabIndex);
  public String             getType();
  public String             getValue();
  public void               setValue(String value);
  public void               blur();
  public void               focus();
  public void               select();
}
```

org/w3c/dom/html/HTMLButtonElement.java:

```
package org.w3c.dom.html;

public interface HTMLButtonElement extends HTMLElement {
  public HTMLFormElement    getForm();
  public String             getAccessKey();
  public void               setAccessKey(String accessKey);
  public boolean            getDisabled();
  public void               setDisabled(boolean disabled);
  public String             getName();
  public void               setName(String name);
  public int                getTabIndex();
  public void               setTabIndex(int tabIndex);
  public String             getType();
  public String             getValue();
  public void               setValue(String value);
}
```

org/w3c/dom/html/HTMLLabelElement.java:

```
package org.w3c.dom.html;

public interface HTMLLabelElement extends HTMLElement {
  public HTMLFormElement    getForm();
  public String             getAccessKey();
  public void               setAccessKey(String accessKey);
  public String             getHtmlFor();
  public void               setHtmlFor(String htmlFor);
}
```

org/w3c/dom/html/HTMLFieldSetElement.java:

```
package org.w3c.dom.html;

public interface HTMLFieldSetElement extends HTMLElement {
  public HTMLFormElement    getForm();
}
```

org/w3c/dom/html/HTMLLegendElement.java:

```
package org.w3c.dom.html;

public interface HTMLLegendElement extends HTMLElement {
  public HTMLFormElement    getForm();
  public String             getAccessKey();
  public void               setAccessKey(String accessKey);
  public String             getAlign();
  public void               setAlign(String align);
}
```

org/w3c/dom/html/HTMLUListElement.java:

```
package org.w3c.dom.html;

public interface HTMLUListElement extends HTMLElement {
  public boolean            getCompact();
  public void               setCompact(boolean compact);
  public String             getType();
  public void               setType(String type);
}
```

org/w3c/dom/html/HTMLOListElement.java:

```
package org.w3c.dom.html;

public interface HTMLOListElement extends HTMLElement {
  public boolean            getCompact();
  public void               setCompact(boolean compact);
  public int                getStart();
  public void               setStart(int start);
  public String             getType();
  public void               setType(String type);
}
```

org/w3c/dom/html/HTMLDListElement.java:

```
package org.w3c.dom.html;

public interface HTMLDListElement extends HTMLElement {
  public boolean            getCompact();
  public void               setCompact(boolean compact);
}
```

org/w3c/dom/html/HTMLDirectoryElement.java:

```
package org.w3c.dom.html;

public interface HTMLDirectoryElement extends HTMLElement {
  public boolean            getCompact();
  public void               setCompact(boolean compact);
}
```

org/w3c/dom/html/HTMLMenuElement.java:

```
package org.w3c.dom.html;

public interface HTMLMenuElement extends HTMLElement {
  public boolean            getCompact();
  public void               setCompact(boolean compact);
}
```

org/w3c/dom/html/HTMLLIElement.java:

```
package org.w3c.dom.html;

public interface HTMLLIElement extends HTMLElement {
  public String             getType();
  public void               setType(String type);
  public int                getValue();
  public void               setValue(int value);
}
```

org/w3c/dom/html/HTMLDivElement.java:

```
package org.w3c.dom.html;

public interface HTMLDivElement extends HTMLElement {
  public String             getAlign();
  public void               setAlign(String align);
}
```

org/w3c/dom/html/HTMLParagraphElement.java:

```
package org.w3c.dom.html;

public interface HTMLParagraphElement extends HTMLElement {
  public String             getAlign();
  public void               setAlign(String align);
}
```

org/w3c/dom/html/HTMLHeadingElement.java:

```
package org.w3c.dom.html;

public interface HTMLHeadingElement extends HTMLElement {
  public String             getAlign();
  public void               setAlign(String align);
}
```

org/w3c/dom/html/HTMLQuoteElement.java:

```
package org.w3c.dom.html;

public interface HTMLQuoteElement extends HTMLElement {
  public String             getCite();
  public void               setCite(String cite);
}
```

org/w3c/dom/html/HTMLPreElement.java:

```
package org.w3c.dom.html;
```

```
public interface HTMLPreElement extends HTMLElement {
  public int                getWidth();
  public void               setWidth(int width);
}
```

org/w3c/dom/html/HTMLBRElement.java:

```
package org.w3c.dom.html;

public interface HTMLBRElement extends HTMLElement {
  public String             getClear();
  public void               setClear(String clear);
}
```

org/w3c/dom/html/HTMLBaseFontElement.java:

```
package org.w3c.dom.html;

public interface HTMLBaseFontElement extends HTMLElement {
  public String             getColor();
  public void               setColor(String color);
  public String             getFace();
  public void               setFace(String face);
  public String             getSize();
  public void               setSize(String size);
}
```

org/w3c/dom/html/HTMLFontElement.java:

```
package org.w3c.dom.html;

public interface HTMLFontElement extends HTMLElement {
  public String             getColor();
  public void               setColor(String color);
  public String             getFace();
  public void               setFace(String face);
  public String             getSize();
  public void               setSize(String size);
}
```

org/w3c/dom/html/HTMLHRElement.java:

```
package org.w3c.dom.html;

public interface HTMLHRElement extends HTMLElement {
  public String             getAlign();
  public void               setAlign(String align);
  public boolean            getNoShade();
  public void               setNoShade(boolean noShade);
  public String             getSize();
  public void               setSize(String size);
  public String             getWidth();
  public void               setWidth(String width);
}
```

org/w3c/dom/html/HTMLModElement.java:

```
package org.w3c.dom.html;

public interface HTMLModElement extends HTMLElement {
  public String             getCite();
  public void               setCite(String cite);
  public String             getDateTime();
  public void               setDateTime(String dateTime);
}
```

org/w3c/dom/html/HTMLAnchorElement.java:

```
package org.w3c.dom.html;

public interface HTMLAnchorElement extends HTMLElement {
  public String             getAccessKey();
  public void               setAccessKey(String accessKey);
  public String             getCharset();
  public void               setCharset(String charset);
  public String             getCoords();
  public void               setCoords(String coords);
  public String             getHref();
  public void               setHref(String href);
  public String             getHreflang();
  public void               setHreflang(String hreflang);
  public String             getName();
  public void               setName(String name);
  public String             getRel();
  public void               setRel(String rel);
  public String             getRev();
  public void               setRev(String rev);
  public String             getShape();
  public void               setShape(String shape);
  public int                getTabIndex();
  public void               setTabIndex(int tabIndex);
  public String             getTarget();
  public void               setTarget(String target);
  public String             getType();
  public void               setType(String type);
  public void               blur();
  public void               focus();
}
```

org/w3c/dom/html/HTMLImageElement.java:

```
package org.w3c.dom.html;

public interface HTMLImageElement extends HTMLElement {
  public String             getLowSrc();
  public void               setLowSrc(String lowSrc);
  public String             getName();
  public void               setName(String name);
  public String             getAlign();
  public void               setAlign(String align);
```

```
  public String             getAlt();
  public void               setAlt(String alt);
  public String             getBorder();
  public void               setBorder(String border);
  public String             getHeight();
  public void               setHeight(String height);
  public String             getHspace();
  public void               setHspace(String hspace);
  public boolean            getIsMap();
  public void               setIsMap(boolean isMap);
  public String             getLongDesc();
  public void               setLongDesc(String longDesc);
  public String             getSrc();
  public void               setSrc(String src);
  public String             getUseMap();
  public void               setUseMap(String useMap);
  public String             getVspace();
  public void               setVspace(String vspace);
  public String             getWidth();
  public void               setWidth(String width);
}
```

org/w3c/dom/html/HTMLObjectElement.java:

```
package org.w3c.dom.html;

public interface HTMLObjectElement extends HTMLElement {
  public HTMLFormElement    getForm();
  public String             getCode();
  public void               setCode(String code);
  public String             getAlign();
  public void               setAlign(String align);
  public String             getArchive();
  public void               setArchive(String archive);
  public String             getBorder();
  public void               setBorder(String border);
  public String             getCodeBase();
  public void               setCodeBase(String codeBase);
  public String             getCodeType();
  public void               setCodeType(String codeType);
  public String             getData();
  public void               setData(String data);
  public boolean            getDeclare();
  public void               setDeclare(boolean declare);
  public String             getHeight();
  public void               setHeight(String height);
  public String             getHspace();
  public void               setHspace(String hspace);
  public String             getName();
  public void               setName(String name);
  public String             getStandby();
  public void               setStandby(String standby);
  public int                getTabIndex();
  public void               setTabIndex(int tabIndex);
  public String             getType();
  public void               setType(String type);
```

```
  public String             getUseMap();
  public void               setUseMap(String useMap);
  public String             getVspace();
  public void               setVspace(String vspace);
  public String             getWidth();
  public void               setWidth(String width);
}
```

org/w3c/dom/html/HTMLParamElement.java:

```
package org.w3c.dom.html;

public interface HTMLParamElement extends HTMLElement {
  public String             getName();
  public void               setName(String name);
  public String             getType();
  public void               setType(String type);
  public String             getValue();
  public void               setValue(String value);
  public String             getValueType();
  public void               setValueType(String valueType);
}
```

org/w3c/dom/html/HTMLAppletElement.java:

```
package org.w3c.dom.html;

public interface HTMLAppletElement extends HTMLElement {
  public String             getAlign();
  public void               setAlign(String align);
  public String             getAlt();
  public void               setAlt(String alt);
  public String             getArchive();
  public void               setArchive(String archive);
  public String             getCode();
  public void               setCode(String code);
  public String             getCodeBase();
  public void               setCodeBase(String codeBase);
  public String             getHeight();
  public void               setHeight(String height);
  public String             getHspace();
  public void               setHspace(String hspace);
  public String             getName();
  public void               setName(String name);
  public String             getObject();
  public void               setObject(String object);
  public String             getVspace();
  public void               setVspace(String vspace);
  public String             getWidth();
  public void               setWidth(String width);
}
```

org/w3c/dom/html/HTMLMapElement.java:

```
package org.w3c.dom.html;

public interface HTMLMapElement extends HTMLElement {
  public HTMLCollection     getAreas();
  public String             getName();
  public void               setName(String name);
}
```

org/w3c/dom/html/HTMLAreaElement.java:

```
package org.w3c.dom.html;

public interface HTMLAreaElement extends HTMLElement {
  public String             getAccessKey();
  public void               setAccessKey(String accessKey);
  public String             getAlt();
  public void               setAlt(String alt);
  public String             getCoords();
  public void               setCoords(String coords);
  public String             getHref();
  public void               setHref(String href);
  public boolean            getNoHref();
  public void               setNoHref(boolean noHref);
  public String             getShape();
  public void               setShape(String shape);
  public int                getTabIndex();
  public void               setTabIndex(int tabIndex);
  public String             getTarget();
  public void               setTarget(String target);
}
```

org/w3c/dom/html/HTMLScriptElement.java:

```
package org.w3c.dom.html;

public interface HTMLScriptElement extends HTMLElement {
  public String             getText();
  public void               setText(String text);
  public String             getHtmlFor();
  public void               setHtmlFor(String htmlFor);
  public String             getEvent();
  public void               setEvent(String event);
  public String             getCharset();
  public void               setCharset(String charset);
  public boolean            getDefer();
  public void               setDefer(boolean defer);
  public String             getSrc();
  public void               setSrc(String src);
  public String             getType();
  public void               setType(String type);
}
```

org/w3c/dom/html/HTMLTableElement.java:

```
package org.w3c.dom.html;

public interface HTMLTableElement extends HTMLElement {
  public HTMLTableCaptionElement getCaption();
  public void               setCaption(HTMLTableCaptionElement caption);
  public HTMLTableSectionElement getTHead();
  public void               setTHead(HTMLTableSectionElement tHead);
  public HTMLTableSectionElement getTFoot();
  public void               setTFoot(HTMLTableSectionElement tFoot);
  public HTMLCollection     getRows();
  public HTMLCollection     getTBodies();
  public String             getAlign();
  public void               setAlign(String align);
  public String             getBgColor();
  public void               setBgColor(String bgColor);
  public String             getBorder();
  public void               setBorder(String border);
  public String             getCellPadding();
  public void               setCellPadding(String cellPadding);
  public String             getCellSpacing();
  public void               setCellSpacing(String cellSpacing);
  public String             getFrame();
  public void               setFrame(String frame);
  public String             getRules();
  public void               setRules(String rules);
  public String             getSummary();
  public void               setSummary(String summary);
  public String             getWidth();
  public void               setWidth(String width);
  public HTMLElement        createTHead();
  public void               deleteTHead();
  public HTMLElement        createTFoot();
  public void               deleteTFoot();
  public HTMLElement        createCaption();
  public void               deleteCaption();
  public HTMLElement        insertRow(int index);
  public void               deleteRow(int index);
}
```

org/w3c/dom/html/HTMLTableCaptionElement.java:

```
package org.w3c.dom.html;

public interface HTMLTableCaptionElement extends HTMLElement {
  public String             getAlign();
  public void               setAlign(String align);
}
```

org/w3c/dom/html/HTMLTableColElement.java:

```
package org.w3c.dom.html;

public interface HTMLTableColElement extends HTMLElement {
  public String             getAlign();
  public void               setAlign(String align);
  public String             getCh();
  public void               setCh(String ch);
  public String             getChOff();
  public void               setChOff(String chOff);
  public int                getSpan();
  public void               setSpan(int span);
  public String             getVAlign();
  public void               setVAlign(String vAlign);
  public String             getWidth();
  public void               setWidth(String width);
}
```

org/w3c/dom/html/HTMLTableSectionElement.java:

```
package org.w3c.dom.html;

public interface HTMLTableSectionElement extends HTMLElement {
  public String             getAlign();
  public void               setAlign(String align);
  public String             getCh();
  public void               setCh(String ch);
  public String             getChOff();
  public void               setChOff(String chOff);
  public String             getVAlign();
  public void               setVAlign(String vAlign);
  public HTMLCollection     getRows();
  public HTMLElement        insertRow(int index);
  public void               deleteRow(int index);
}
```

org/w3c/dom/html/HTMLTableRowElement.java:

```
package org.w3c.dom.html;

public interface HTMLTableRowElement extends HTMLElement {
  public int                getRowIndex();
  public int                getSectionRowIndex();
  public HTMLCollection     getCells();
  public String             getAlign();
  public void               setAlign(String align);
  public String             getBgColor();
  public void               setBgColor(String bgColor);
  public String             getCh();
  public void               setCh(String ch);
  public String             getChOff();
  public void               setChOff(String chOff);
  public String             getVAlign();
```

```
  public void               setVAlign(String vAlign);
  public HTMLElement        insertCell(int index);
  public void               deleteCell(int index);
}
```

org/w3c/dom/html/HTMLTableCellElement.java:

```
package org.w3c.dom.html;

public interface HTMLTableCellElement extends HTMLElement {
  public int                getCellIndex();
  public String             getAbbr();
  public void               setAbbr(String abbr);
  public String             getAlign();
  public void               setAlign(String align);
  public String             getAxis();
  public void               setAxis(String axis);
  public String             getBgColor();
  public void               setBgColor(String bgColor);
  public String             getCh();
  public void               setCh(String ch);
  public String             getChOff();
  public void               setChOff(String chOff);
  public int                getColSpan();
  public void               setColSpan(int colSpan);
  public String             getHeaders();
  public void               setHeaders(String headers);
  public String             getHeight();
  public void               setHeight(String height);
  public boolean            getNoWrap();
  public void               setNoWrap(boolean noWrap);
  public int                getRowSpan();
  public void               setRowSpan(int rowSpan);
  public String             getScope();
  public void               setScope(String scope);
  public String             getVAlign();
  public void               setVAlign(String vAlign);
  public String             getWidth();
  public void               setWidth(String width);
}
```

org/w3c/dom/html/HTMLFrameSetElement.java:

```
package org.w3c.dom.html;

public interface HTMLFrameSetElement extends HTMLElement {
  public String             getCols();
  public void               setCols(String cols);
  public String             getRows();
  public void               setRows(String rows);
}
```

org/w3c/dom/html/HTMLFrameElement.java:

```
package org.w3c.dom.html;

public interface HTMLFrameElement extends HTMLElement {
  public String             getFrameBorder();
  public void               setFrameBorder(String frameBorder);
  public String             getLongDesc();
  public void               setLongDesc(String longDesc);
  public String             getMarginHeight();
  public void               setMarginHeight(String marginHeight);
  public String             getMarginWidth();
  public void               setMarginWidth(String marginWidth);
  public String             getName();
  public void               setName(String name);
  public boolean            getNoResize();
  public void               setNoResize(boolean noResize);
  public String             getScrolling();
  public void               setScrolling(String scrolling);
  public String             getSrc();
  public void               setSrc(String src);
}
```

org/w3c/dom/html/HTMLIFrameElement.java:

```
package org.w3c.dom.html;

public interface HTMLIFrameElement extends HTMLElement {
  public String             getAlign();
  public void               setAlign(String align);
  public String             getFrameBorder();
  public void               setFrameBorder(String frameBorder);
  public String             getHeight();
  public void               setHeight(String height);
  public String             getLongDesc();
  public void               setLongDesc(String longDesc);
  public String             getMarginHeight();
  public void               setMarginHeight(String marginHeight);
  public String             getMarginWidth();
  public void               setMarginWidth(String marginWidth);
  public String             getName();
  public void               setName(String name);
  public String             getScrolling();
  public void               setScrolling(String scrolling);
  public String             getSrc();
  public void               setSrc(String src);
  public String             getWidth();
  public void               setWidth(String width);
}
```

C.3: Document Object Model Views

org/w3c/dom/views/AbstractView.java:

```
package org.w3c.dom.views;

public interface AbstractView {
  public DocumentView       getDocument();
}
```

org/w3c/dom/views/DocumentView.java:

```
package org.w3c.dom.views;

public interface DocumentView {
  public AbstractView       getDefaultView();
}
```

C.4: Document Object Model Stylesheets

org/w3c/dom/stylesheets/StyleSheet.java:

```
package org.w3c.dom.stylesheets;

import org.w3c.dom.Node;

public interface StyleSheet {
  public String             getType();
  public boolean            getDisabled();
  public void               setDisabled(boolean disabled);
  public Node               getOwnerNode();
  public StyleSheet         getParentStyleSheet();
  public String             getHref();
  public String             getTitle();
  public MediaList          getMedia();
}
```

org/w3c/dom/stylesheets/StyleSheetList.java:

```
package org.w3c.dom.stylesheets;

public interface StyleSheetList {
  public int                getLength();
  public StyleSheet         item(int index);
}
```

org/w3c/dom/stylesheets/MediaList.java:

```
package org.w3c.dom.stylesheets;

import org.w3c.dom.DOMException;

public interface MediaList {
  public String             getCssText();
  public void               setCssText(String cssText)
                                 throws DOMException;
  public int                getLength();
  public String             item(int index);
  public void               delete(String oldMedium)
                                 throws DOMException;
  public void               append(String newMedium)
                                 throws DOMException;
}
```

org/w3c/dom/stylesheets/LinkStyle.java:

```
package org.w3c.dom.stylesheets;

public interface LinkStyle {
  public StyleSheet         getSheet();
}
```

org/w3c/dom/stylesheets/DocumentStyle.java:

```
package org.w3c.dom.stylesheets;

public interface DocumentStyle {
  public StyleSheetList     getStyleSheets();
}
```

C.5: Document Object Model CSS

org/w3c/dom/css/CSSException.java:

```
package org.w3c.dom.css;

public abstract class CSSException extends RuntimeException {
  public CSSException(short code, String message) {
     super(message);
     this.code = code;
  }
  public short   code;
  // CSSExceptionCode
  public static final short           SYNTAX_ERR           = 0;
  public static final short           INVALID_MODIFICATION_ERR = 1;

}
```

org/w3c/dom/css/CSSStyleSheet.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;
import org.w3c.dom.stylesheets.StyleSheet;

public interface CSSStyleSheet extends StyleSheet {
  public CSSRule            getOwnerRule();
  public CSSRuleList        getCssRules();
  public int                insertRule(String rule,
                                       int index)
                                       throws DOMException, CSSException;
  public void               deleteRule(int index)
                                       throws DOMException;
}
```

org/w3c/dom/css/CSSRuleList.java:

```
package org.w3c.dom.css;

public interface CSSRuleList {
  public int                getLength();
  public CSSRule            item(int index);
}
```

org/w3c/dom/css/CSSRule.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSSRule {
  // RuleType
  public static final short           UNKNOWN_RULE         = 0;
  public static final short           STYLE_RULE           = 1;
  public static final short           CHARSET_RULE         = 2;
  public static final short           IMPORT_RULE          = 3;
  public static final short           MEDIA_RULE           = 4;
  public static final short           FONT_FACE_RULE       = 5;
  public static final short           PAGE_RULE            = 6;

  public short              getType();
  public String             getCssText();
  public void               setCssText(String cssText)
                                 throws CSSException, DOMException;
  public CSSStyleSheet      getParentStyleSheet();
  public CSSRule            getParentRule();
}
```

org/w3c/dom/css/CSSStyleRule.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSSStyleRule extends CSSRule {
  public String             getSelectorText();
  public void               setSelectorText(String selectorText)
                                 throws CSSException, DOMException;
  public CSSStyleDeclaration getStyle();
}
```

org/w3c/dom/css/CSSMediaRule.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;
import org.w3c.dom.stylesheets.MediaList;

public interface CSSMediaRule extends CSSRule {
  public MediaList          getMedia();
  public CSSRuleList        getCssRules();
  public int                insertRule(String rule,
                                       int index)
                                       throws DOMException, CSSException;
  public void               deleteRule(int index)
                                       throws DOMException;
}
```

org/w3c/dom/css/CSSFontFaceRule.java:

```
package org.w3c.dom.css;

public interface CSSFontFaceRule extends CSSRule {
  public CSSStyleDeclaration getStyle();
}
```

org/w3c/dom/css/CSSPageRule.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSSPageRule extends CSSRule {
  public String             getSelectorText();
  public void               setSelectorText(String selectorText)
                                       throws CSSException, DOMException;
  public CSSStyleDeclaration getStyle();
}
```

org/w3c/dom/css/CSSImportRule.java:

```
package org.w3c.dom.css;

import org.w3c.dom.stylesheets.MediaList;

public interface CSSImportRule extends CSSRule {
  public String             getHref();
  public MediaList          getMedia();
  public CSSStyleSheet      getStyleSheet();
}
```

org/w3c/dom/css/CSSCharsetRule.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSSCharsetRule extends CSSRule {
  public String             getEncoding();
  public void               setEncoding(String encoding)
                                    throws CSSException, DOMException;
}
```

org/w3c/dom/css/CSSUnknownRule.java:

```
package org.w3c.dom.css;

public interface CSSUnknownRule extends CSSRule {
}
```

org/w3c/dom/css/CSSStyleDeclaration.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSSStyleDeclaration {
  public String             getCssText();
  public void               setCssText(String cssText)
                                    throws CSSException, DOMException;
  public String             getPropertyValue(String propertyName);
  public CSSValue           getPropertyCSSValue(String propertyName);
  public String             removeProperty(String propertyName)
                                       throws DOMException;
  public String             getPropertyPriority(String propertyName);
  public void               setProperty(String propertyName,
                                        String value,
                                        String priority)
                                        throws CSSException, DOMException;
  public int                getLength();
  public String             item(int index);
  public CSSRule            getParentRule();
}
```

org/w3c/dom/css/CSSValue.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSSValue {
  // UnitTypes
  public static final short           CSS_INHERIT          = 0;
  public static final short           CSS_PRIMITIVE_VALUE  = 1;
  public static final short           CSS_VALUE_LIST       = 2;
  public static final short           CSS_CUSTOM           = 3;

  public String             getCssText();
  public void               setCssText(String cssText)
                                 throws CSSException, DOMException;
  public short              getValueType();
}
```

org/w3c/dom/css/CSSPrimitiveValue.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSSPrimitiveValue extends CSSValue {
  // UnitTypes
  public static final short           CSS_UNKNOWN          = 0;
  public static final short           CSS_NUMBER           = 1;
  public static final short           CSS_PERCENTAGE       = 2;
  public static final short           CSS_EMS              = 3;
  public static final short           CSS_EXS              = 4;
  public static final short           CSS_PX               = 5;
  public static final short           CSS_CM               = 6;
  public static final short           CSS_MM               = 9;
  public static final short           CSS_IN               = 10;
  public static final short           CSS_PT               = 11;
  public static final short           CSS_PC               = 12;
  public static final short           CSS_DEG              = 13;
  public static final short           CSS_RAD              = 14;
  public static final short           CSS_GRAD             = 15;
  public static final short           CSS_MS               = 16;
  public static final short           CSS_S                = 17;
  public static final short           CSS_HZ               = 18;
  public static final short           CSS_KHZ              = 19;
  public static final short           CSS_DIMENSION        = 20;
  public static final short           CSS_STRING           = 21;
  public static final short           CSS_URI              = 22;
  public static final short           CSS_IDENT            = 23;
  public static final short           CSS_ATTR             = 24;
  public static final short           CSS_COUNTER          = 25;
  public static final short           CSS_RECT             = 26;
  public static final short           CSS_RGBCOLOR         = 27;

  public short              getPrimitiveType();
  public void               setFloatValue(short unitType,
```

```
                                        float floatValue)
                                        throws DOMException;
  public float              getFloatValue(short unitType)
                                        throws DOMException;
  public void               setStringValue(short stringType,
                                           String stringValue)
                                           throws DOMException;
  public String             getStringValue()
                                           throws DOMException;
  public Counter            getCounterValue()
                                            throws DOMException;
  public Rect               getRectValue()
                                       throws DOMException;
  public RGBColor           getRGBColorValue()
                                             throws DOMException;
}
```

org/w3c/dom/css/CSSValueList.java:

```
package org.w3c.dom.css;

public interface CSSValueList extends CSSValue {
  public int                getLength();
  public CSSValue           item(int index);
}
```

org/w3c/dom/css/RGBColor.java:

```
package org.w3c.dom.css;

public interface RGBColor {
  public CSSPrimitiveValue  getRed();
  public CSSPrimitiveValue  getGreen();
  public CSSPrimitiveValue  getBlue();
}
```

org/w3c/dom/css/Rect.java:

```
package org.w3c.dom.css;

public interface Rect {
  public CSSPrimitiveValue  getTop();
  public CSSPrimitiveValue  getRight();
  public CSSPrimitiveValue  getBottom();
  public CSSPrimitiveValue  getLeft();
}
```

org/w3c/dom/css/Counter.java:

```
package org.w3c.dom.css;

public interface Counter {
```

```
  public String             getIdentifier();
  public String             getListStyle();
  public String             getSeparator();
}
```

org/w3c/dom/css/ViewCSS.java:

```
package org.w3c.dom.css;

import org.w3c.dom.Element;
import org.w3c.dom.views.AbstractView;

public interface ViewCSS extends AbstractView {
  public CSSStyleDeclaration getComputedStyle(Element elt,
                                              String pseudoElt);
}
```

org/w3c/dom/css/DocumentCSS.java:

```
package org.w3c.dom.css;

import org.w3c.dom.Element;
import org.w3c.dom.stylesheets.DocumentStyle;

public interface DocumentCSS extends DocumentStyle {
  public CSSStyleDeclaration getOverrideStyle(Element elt,
                                              String pseudoElt);
}
```

org/w3c/dom/css/DOMImplementationCSS.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMImplementation;

public interface DOMImplementationCSS extends DOMImplementation {
  public CSSStyleSheet      createCSSStyleSheet(String title,
                                                String media);
}
```

org/w3c/dom/css/CSS2Azimuth.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSS2Azimuth extends CSSValue {
  public short              getAzimuthType();
  public String             getIdentifier();
  public boolean            getBehind();
  public void               setAngleValue(short uType,
                                          float fValue)
                                          throws DOMException;
  public float              getAngleValue(short uType)
```

```
                                        throws DOMException;
  public void               setIdentifier(String ident,
                                        boolean b)
                                        throws CSSException, DOMException;
}
```

org/w3c/dom/css/CSS2BackgroundPosition.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSS2BackgroundPosition extends CSSValue {
  public short              getHorizontalType();
  public short              getVerticalType();
  public String             getHorizontalIdentifier();
  public String             getVerticalIdentifier();
  public float              getHorizontalPosition(float hType)
                                          throws DOMException;
  public float              getVerticalPosition(float vType)
                                        throws DOMException;
  public void               setHorizontalPosition(short hType,
                                          float value)
                                          throws DOMException;
  public void               setVerticalPosition(short vType,
                                        float value)
                                        throws DOMException;
  public void               setPositionIdentifier(String hIdentifier,
                                          String vIdentifier)
                                          throws CSSException, DOMException;
}
```

org/w3c/dom/css/CSS2BorderSpacing.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSS2BorderSpacing extends CSSValue {
  public short              getHorizontalType();
  public short              getVerticalType();
  public float              getHorizontalSpacing(float hType)
                                          throws DOMException;
  public float              getVerticalSpacing(float vType)
                                        throws DOMException;
  public void               setHorizontalSpacing(short hType,
                                          float value)
                                          throws DOMException;
  public void               setVerticalSpacing(short vType,
                                        float value)
                                        throws DOMException;
}
```

org/w3c/dom/css/CSS2CounterReset.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSS2CounterReset extends CSSValue {
  public String             getIdentifier();
  public void               setIdentifier(String identifier)
                                          throws CSSException, DOMException;
  public short              getReset();
  public void               setReset(short reset)
                                          throws DOMException;
}
```

org/w3c/dom/css/CSS2CounterIncrement.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSS2CounterIncrement extends CSSValue {
  public String             getIdentifier();
  public void               setIdentifier(String identifier)
                                          throws CSSException, DOMException;
  public short              getIncrement();
  public void               setIncrement(short increment)
                                          throws DOMException;
}
```

org/w3c/dom/css/CSS2Cursor.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSS2Cursor extends CSSValue {
  public CSSValueList       getUris();
  public String             getPredefinedCursor();
  public void               setPredefinedCursor(String predefinedCursor)
                                          throws CSSException, DOMException;
}
```

org/w3c/dom/css/CSS2PlayDuring.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSS2PlayDuring extends CSSValue {
  public short              getPlayDuringType();
  public String             getPlayDuringIdentifier();
  public void               setPlayDuringIdentifier(String playDuringIdentifier)
                                          throws CSSException, DOMException;
  public String             getUri();
```

```
  public void               setUri(String uri)
                                                throws CSSException, DOMException;
  public boolean            getMix();
  public void               setMix(boolean mix)
                                                throws DOMException;
  public boolean            getRepeat();
  public void               setRepeat(boolean repeat)
                                                throws DOMException;
}
```

org/w3c/dom/css/CSS2TextShadow.java:

```
package org.w3c.dom.css;

public interface CSS2TextShadow {
  public CSSValue           getColor();
  public CSSValue           getHorizontal();
  public CSSValue           getVertical();
  public CSSValue           getBlur();
}
```

org/w3c/dom/css/CSS2FontFaceSrc.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSS2FontFaceSrc {
  public String             getUri();
  public void               setUri(String uri)
                                                throws CSSException, DOMException;
  public CSSValueList       getFormat();
  public String             getFontFaceName();
  public void               setFontFaceName(String fontFaceName)
                                                throws CSSException, DOMException;
}
```

org/w3c/dom/css/CSS2FontFaceWidths.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSS2FontFaceWidths {
  public String             getUrange();
  public void               setUrange(String urange)
                                                throws CSSException, DOMException;
  public CSSValueList       getNumbers();
}
```

org/w3c/dom/css/CSS2PageSize.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSS2PageSize extends CSSValue {
  public short              getWidthType();
  public short              getHeightType();
  public String             getIdentifier();
  public float              getWidth(float wType)
                                    throws DOMException;
  public float              getHeightSize(float hType)
                                     throws DOMException;
  public void               setWidthSize(short wType,
                                        float value)
                                        throws DOMException;
  public void               setHeightSize(short hType,
                                         float value)
                                         throws DOMException;
  public void               setIdentifier(String ident)
                                         throws CSSException, DOMException;
}
```

org/w3c/dom/css/CSS2Properties.java:

```
package org.w3c.dom.css;

import org.w3c.dom.DOMException;

public interface CSS2Properties {
  public String             getAzimuth();
  public void               setAzimuth(String azimuth)
                                         throws CSSException, DOMException;
  public String             getBackground();
  public void               setBackground(String background)
                                         throws CSSException, DOMException;
  public String             getBackgroundAttachment();
  public void               setBackgroundAttachment(String backgroundAttachment)
                                         throws CSSException, DOMException;
  public String             getBackgroundColor();
  public void               setBackgroundColor(String backgroundColor)
                                         throws CSSException, DOMException;
  public String             getBackgroundImage();
  public void               setBackgroundImage(String backgroundImage)
                                         throws CSSException, DOMException;
  public String             getBackgroundPosition();
  public void               setBackgroundPosition(String backgroundPosition)
                                         throws CSSException, DOMException;
  public String             getBackgroundRepeat();
  public void               setBackgroundRepeat(String backgroundRepeat)
                                         throws CSSException, DOMException;
  public String             getBorder();
  public void               setBorder(String border)
                                         throws CSSException, DOMException;
  public String             getBorderCollapse();
```

```
public void             setBorderCollapse(String borderCollapse)
                                throws CSSException, DOMException;
public String           getBorderColor();
public void             setBorderColor(String borderColor)
                                throws CSSException, DOMException;
public String           getBorderSpacing();
public void             setBorderSpacing(String borderSpacing)
                                throws CSSException, DOMException;
public String           getBorderStyle();
public void             setBorderStyle(String borderStyle)
                                throws CSSException, DOMException;
public String           getBorderTop();
public void             setBorderTop(String borderTop)
                                throws CSSException, DOMException;
public String           getBorderRight();
public void             setBorderRight(String borderRight)
                                throws CSSException, DOMException;
public String           getBorderBottom();
public void             setBorderBottom(String borderBottom)
                                throws CSSException, DOMException;
public String           getBorderLeft();
public void             setBorderLeft(String borderLeft)
                                throws CSSException, DOMException;
public String           getBorderTopColor();
public void             setBorderTopColor(String borderTopColor)
                                throws CSSException, DOMException;
public String           getBorderRightColor();
public void             setBorderRightColor(String borderRightColor)
                                throws CSSException, DOMException;
public String           getBorderBottomColor();
public void             setBorderBottomColor(String borderBottomColor)
                                throws CSSException, DOMException;
public String           getBorderLeftColor();
public void             setBorderLeftColor(String borderLeftColor)
                                throws CSSException, DOMException;
public String           getBorderTopStyle();
public void             setBorderTopStyle(String borderTopStyle)
                                throws CSSException, DOMException;
public String           getBorderRightStyle();
public void             setBorderRightStyle(String borderRightStyle)
                                throws CSSException, DOMException;
public String           getBorderBottomStyle();
public void             setBorderBottomStyle(String borderBottomStyle)
                                throws CSSException, DOMException;
public String           getBorderLeftStyle();
public void             setBorderLeftStyle(String borderLeftStyle)
                                throws CSSException, DOMException;
public String           getBorderTopWidth();
public void             setBorderTopWidth(String borderTopWidth)
                                throws CSSException, DOMException;
public String           getBorderRightWidth();
public void             setBorderRightWidth(String borderRightWidth)
                                throws CSSException, DOMException;
public String           getBorderBottomWidth();
public void             setBorderBottomWidth(String borderBottomWidth)
                                throws CSSException, DOMException;
public String           getBorderLeftWidth();
```

```
public void             setBorderLeftWidth(String borderLeftWidth)
                                throws CSSException, DOMException;
public String           getBorderWidth();
public void             setBorderWidth(String borderWidth)
                                throws CSSException, DOMException;
public String           getBottom();
public void             setBottom(String bottom)
                                throws CSSException, DOMException;
public String           getCaptionSide();
public void             setCaptionSide(String captionSide)
                                throws CSSException, DOMException;
public String           getClear();
public void             setClear(String clear)
                                throws CSSException, DOMException;
public String           getClip();
public void             setClip(String clip)
                                throws CSSException, DOMException;
public String           getColor();
public void             setColor(String color)
                                throws CSSException, DOMException;
public String           getContent();
public void             setContent(String content)
                                throws CSSException, DOMException;
public String           getCounterIncrement();
public void             setCounterIncrement(String counterIncrement)
                                throws CSSException, DOMException;
public String           getCounterReset();
public void             setCounterReset(String counterReset)
                                throws CSSException, DOMException;
public String           getCue();
public void             setCue(String cue)
                                throws CSSException, DOMException;
public String           getCueAfter();
public void             setCueAfter(String cueAfter)
                                throws CSSException, DOMException;
public String           getCueBefore();
public void             setCueBefore(String cueBefore)
                                throws CSSException, DOMException;
public String           getCursor();
public void             setCursor(String cursor)
                                throws CSSException, DOMException;
public String           getDirection();
public void             setDirection(String direction)
                                throws CSSException, DOMException;
public String           getDisplay();
public void             setDisplay(String display)
                                throws CSSException, DOMException;
public String           getElevation();
public void             setElevation(String elevation)
                                throws CSSException, DOMException;
public String           getEmptyCells();
public void             setEmptyCells(String emptyCells)
                                throws CSSException, DOMException;
public String           getCssFloat();
public void             setCssFloat(String cssFloat)
                                throws CSSException, DOMException;
public String           getFont();
```

```
public void             setFont(String font)
                                throws CSSException, DOMException;
public String           getFontFamily();
public void             setFontFamily(String fontFamily)
                                throws CSSException, DOMException;
public String           getFontSize();
public void             setFontSize(String fontSize)
                                throws CSSException, DOMException;
public String           getFontSizeAdjust();
public void             setFontSizeAdjust(String fontSizeAdjust)
                                throws CSSException, DOMException;
public String           getFontStretch();
public void             setFontStretch(String fontStretch)
                                throws CSSException, DOMException;
public String           getFontStyle();
public void             setFontStyle(String fontStyle)
                                throws CSSException, DOMException;
public String           getFontVariant();
public void             setFontVariant(String fontVariant)
                                throws CSSException, DOMException;
public String           getFontWeight();
public void             setFontWeight(String fontWeight)
                                throws CSSException, DOMException;
public String           getHeight();
public void             setHeight(String height)
                                throws CSSException, DOMException;
public String           getLeft();
public void             setLeft(String left)
                                throws CSSException, DOMException;
public String           getLetterSpacing();
public void             setLetterSpacing(String letterSpacing)
                                throws CSSException, DOMException;
public String           getLineHeight();
public void             setLineHeight(String lineHeight)
                                throws CSSException, DOMException;
public String           getListStyle();
public void             setListStyle(String listStyle)
                                throws CSSException, DOMException;
public String           getListStyleImage();
public void             setListStyleImage(String listStyleImage)
                                throws CSSException, DOMException;
public String           getListStylePosition();
public void             setListStylePosition(String listStylePosition)
                                throws CSSException, DOMException;
public String           getListStyleType();
public void             setListStyleType(String listStyleType)
                                throws CSSException, DOMException;
public String           getMargin();
public void             setMargin(String margin)
                                throws CSSException, DOMException;
public String           getMarginTop();
public void             setMarginTop(String marginTop)
                                throws CSSException, DOMException;
public String           getMarginRight();
public void             setMarginRight(String marginRight)
                                throws CSSException, DOMException;
public String           getMarginBottom();
```

```
public void             setMarginBottom(String marginBottom)
                                throws CSSException, DOMException;
public String           getMarginLeft();
public void             setMarginLeft(String marginLeft)
                                throws CSSException, DOMException;
public String           getMarkerOffset();
public void             setMarkerOffset(String markerOffset)
                                throws CSSException, DOMException;
public String           getMarks();
public void             setMarks(String marks)
                                throws CSSException, DOMException;
public String           getMaxHeight();
public void             setMaxHeight(String maxHeight)
                                throws CSSException, DOMException;
public String           getMaxWidth();
public void             setMaxWidth(String maxWidth)
                                throws CSSException, DOMException;
public String           getMinHeight();
public void             setMinHeight(String minHeight)
                                throws CSSException, DOMException;
public String           getMinWidth();
public void             setMinWidth(String minWidth)
                                throws CSSException, DOMException;
public String           getOrphans();
public void             setOrphans(String orphans)
                                throws CSSException, DOMException;
public String           getOutline();
public void             setOutline(String outline)
                                throws CSSException, DOMException;
public String           getOutlineColor();
public void             setOutlineColor(String outlineColor)
                                throws CSSException, DOMException;
public String           getOutlineStyle();
public void             setOutlineStyle(String outlineStyle)
                                throws CSSException, DOMException;
public String           getOutlineWidth();
public void             setOutlineWidth(String outlineWidth)
                                throws CSSException, DOMException;
public String           getOverflow();
public void             setOverflow(String overflow)
                                throws CSSException, DOMException;
public String           getPadding();
public void             setPadding(String padding)
                                throws CSSException, DOMException;
public String           getPaddingTop();
public void             setPaddingTop(String paddingTop)
                                throws CSSException, DOMException;
public String           getPaddingRight();
public void             setPaddingRight(String paddingRight)
                                throws CSSException, DOMException;
public String           getPaddingBottom();
public void             setPaddingBottom(String paddingBottom)
                                throws CSSException, DOMException;
public String           getPaddingLeft();
public void             setPaddingLeft(String paddingLeft)
                                throws CSSException, DOMException;
public String           getPage();
```

```
public void             setPage(String page)
                                throws CSSException, DOMException;
public String           getPageBreakAfter();
public void             setPageBreakAfter(String pageBreakAfter)
                                throws CSSException, DOMException;
public String           getPageBreakBefore();
public void             setPageBreakBefore(String pageBreakBefore)
                                throws CSSException, DOMException;
public String           getPageBreakInside();
public void             setPageBreakInside(String pageBreakInside)
                                throws CSSException, DOMException;
public String           getPause();
public void             setPause(String pause)
                                throws CSSException, DOMException;
public String           getPauseAfter();
public void             setPauseAfter(String pauseAfter)
                                throws CSSException, DOMException;
public String           getPauseBefore();
public void             setPauseBefore(String pauseBefore)
                                throws CSSException, DOMException;
public String           getPitch();
public void             setPitch(String pitch)
                                throws CSSException, DOMException;
public String           getPitchRange();
public void             setPitchRange(String pitchRange)
                                throws CSSException, DOMException;
public String           getPlayDuring();
public void             setPlayDuring(String playDuring)
                                throws CSSException, DOMException;
public String           getPosition();
public void             setPosition(String position)
                                throws CSSException, DOMException;
public String           getQuotes();
public void             setQuotes(String quotes)
                                throws CSSException, DOMException;
public String           getRichness();
public void             setRichness(String richness)
                                throws CSSException, DOMException;
public String           getRight();
public void             setRight(String right)
                                throws CSSException, DOMException;
public String           getSize();
public void             setSize(String size)
                                throws CSSException, DOMException;
public String           getSpeak();
public void             setSpeak(String speak)
                                throws CSSException, DOMException;
public String           getSpeakHeader();
public void             setSpeakHeader(String speakHeader)
                                throws CSSException, DOMException;
public String           getSpeakNumeral();
public void             setSpeakNumeral(String speakNumeral)
                                throws CSSException, DOMException;
public String           getSpeakPunctuation();
public void             setSpeakPunctuation(String speakPunctuation)
                                throws CSSException, DOMException;
public String           getSpeechRate();
```

```
    public void             setSpeechRate(String speechRate)
                                    throws CSSException, DOMException;
    public String           getStress();
    public void             setStress(String stress)
                                    throws CSSException, DOMException;
    public String           getTableLayout();
    public void             setTableLayout(String tableLayout)
                                    throws CSSException, DOMException;
    public String           getTextAlign();
    public void             setTextAlign(String textAlign)
                                    throws CSSException, DOMException;
    public String           getTextDecoration();
    public void             setTextDecoration(String textDecoration)
                                    throws CSSException, DOMException;
    public String           getTextIndent();
    public void             setTextIndent(String textIndent)
                                    throws CSSException, DOMException;
    public String           getTextShadow();
    public void             setTextShadow(String textShadow)
                                    throws CSSException, DOMException;
    public String           getTextTransform();
    public void             setTextTransform(String textTransform)
                                    throws CSSException, DOMException;
    public String           getTop();
    public void             setTop(String top)
                                    throws CSSException, DOMException;
    public String           getUnicodeBidi();
    public void             setUnicodeBidi(String unicodeBidi)
                                    throws CSSException, DOMException;
    public String           getVerticalAlign();
    public void             setVerticalAlign(String verticalAlign)
                                    throws CSSException, DOMException;
    public String           getVisibility();
    public void             setVisibility(String visibility)
                                    throws CSSException, DOMException;
    public String           getVoiceFamily();
    public void             setVoiceFamily(String voiceFamily)
                                    throws CSSException, DOMException;
    public String           getVolume();
    public void             setVolume(String volume)
                                    throws CSSException, DOMException;
    public String           getWhiteSpace();
    public void             setWhiteSpace(String whiteSpace)
                                    throws CSSException, DOMException;
    public String           getWidows();
    public void             setWidows(String widows)
                                    throws CSSException, DOMException;
    public String           getWidth();
    public void             setWidth(String width)
                                    throws CSSException, DOMException;
    public String           getWordSpacing();
    public void             setWordSpacing(String wordSpacing)
                                    throws CSSException, DOMException;
    public String           getZIndex();
    public void             setZIndex(String zIndex)
                                    throws CSSException, DOMException;
}
```

org/w3c/dom/css/HTMLElementCSS.java:

```
package org.w3c.dom.css;

import org.w3c.dom.html.HTMLElement;

public interface HTMLElementCSS extends HTMLElement {
  public CSSStyleDeclaration getStyle();
}
```

C.6: Document Object Model Events

org/w3c/dom/events/EventTarget.java:

```
package org.w3c.dom.events;

import org.w3c.dom.DOMException;

public interface EventTarget {
  public void               addEventListener(String type,
                                             EventListener listener,
                                             boolean useCapture);
  public void               removeEventListener(String type,
                                                EventListener listener,
                                                boolean useCapture);
  public boolean            dispatchEvent(Event evt)
                                         throws DOMException;
}
```

org/w3c/dom/events/EventListener.java:

```
package org.w3c.dom.events;

public interface EventListener {
  public void               handleEvent(Event evt);
}
```

org/w3c/dom/events/Event.java:

```
package org.w3c.dom.events;

import org.w3c.dom.Node;

public interface Event {
  // PhaseType
  public static final short           BUBBLING_PHASE       = 1;
  public static final short           CAPTURING_PHASE      = 2;
  public static final short           AT_TARGET            = 3;

  public String             getType();
  public EventTarget        getTarget();
  public Node               getCurrentNode();
  public short              getEventPhase();
```

```
  public boolean            getBubbles();
  public boolean            getCancelable();
  public void               preventBubble();
  public void               preventCapture();
  public void               preventDefault();
  public void               initEvent(String eventTypeArg,
                                      boolean canBubbleArg,
                                      boolean cancelableArg);
}
```

org/w3c/dom/events/DocumentEvent.java:

```
package org.w3c.dom.events;

import org.w3c.dom.DOMException;

public interface DocumentEvent {
  public Event              createEvent(String type)
                                        throws DOMException;
}
```

org/w3c/dom/events/UIEvent.java:

```
package org.w3c.dom.events;

import org.w3c.dom.views.AbstractView;

public interface UIEvent extends Event {
  public AbstractView       getView();
  public short              getDetail();
  public void               initUIEvent(String typeArg,
                                        boolean canBubbleArg,
                                        boolean cancelableArg,
                                        AbstractView viewArg,
                                        short detailArg);
}
```

org/w3c/dom/events/MouseEvent.java:

```
package org.w3c.dom.events;

import org.w3c.dom.Node;
import org.w3c.dom.views.AbstractView;

public interface MouseEvent extends UIEvent {
  public int                getScreenX();
  public int                getScreenY();
  public int                getClientX();
  public int                getClientY();
  public boolean            getCtrlKey();
  public boolean            getShiftKey();
  public boolean            getAltKey();
  public boolean            getMetaKey();
  public short              getButton();
  public Node               getRelatedNode();
```

```
  public void               initMouseEvent(String typeArg,
                                           boolean canBubbleArg,
                                           boolean cancelableArg,
                                           AbstractView viewArg,
                                           short detailArg,
                                           int screenXArg,
                                           int screenYArg,
                                           int clientXArg,
                                           int clientYArg,
                                           boolean ctrlKeyArg,
                                           boolean altKeyArg,
                                           boolean shiftKeyArg,
                                           boolean metaKeyArg,
                                           short buttonArg,
                                           Node relatedNodeArg);
}
```

org/w3c/dom/events/KeyEvent.java:

```
package org.w3c.dom.events;

import org.w3c.dom.views.AbstractView;

public interface KeyEvent extends UIEvent {
  // VirtualKeyCode
  public static final int             CHAR_UNDEFINED       = 0x0FFFF;
  public static final int             DOM_VK_0             = 0x30;
  public static final int             DOM_VK_1             = 0x31;
  public static final int             DOM_VK_2             = 0x32;
  public static final int             DOM_VK_3             = 0x33;
  public static final int             DOM_VK_4             = 0x34;
  public static final int             DOM_VK_5             = 0x35;
  public static final int             DOM_VK_6             = 0x36;
  public static final int             DOM_VK_7             = 0x37;
  public static final int             DOM_VK_8             = 0x38;
  public static final int             DOM_VK_9             = 0x39;
  public static final int             DOM_VK_A             = 0x41;
  public static final int             DOM_VK_ACCEPT        = 0x1E;
  public static final int             DOM_VK_ADD           = 0x6B;
  public static final int             DOM_VK_AGAIN         = 0xFFC9;
  public static final int             DOM_VK_ALL_CANDIDATES = 0x0100;
  public static final int             DOM_VK_ALPHANUMERIC  = 0x00F0;
  public static final int             DOM_VK_ALT           = 0x12;
  public static final int             DOM_VK_ALT_GRAPH     = 0xFF7E;
  public static final int             DOM_VK_AMPERSAND     = 0x96;
  public static final int             DOM_VK_ASTERISK      = 0x97;
  public static final int             DOM_VK_AT            = 0x0200;
  public static final int             DOM_VK_B             = 0x42;
  public static final int             DOM_VK_BACK_QUOTE    = 0xC0;
  public static final int             DOM_VK_BACK_SLASH    = 0x5C;
  public static final int             DOM_VK_BACK_SPACE    = 0x08;
  public static final int             DOM_VK_BRACELEFT     = 0xA1;
  public static final int             DOM_VK_BRACERIGHT    = 0xA2;
  public static final int             DOM_VK_C             = 0x43;
  public static final int             DOM_VK_CANCEL        = 0x03;
  public static final int             DOM_VK_CAPS_LOCK     = 0x14;
```

org/w3c/dom/events/KeyEvent.java:

```
public static final int             DOM_VK_CIRCUMFLEX    = 0x0202;
public static final int             DOM_VK_CLEAR         = 0x0C;
public static final int             DOM_VK_CLOSE_BRACKET = 0x5D;
public static final int             DOM_VK_CODE_INPUT    = 0x0102;
public static final int             DOM_VK_COLON         = 0x0201;
public static final int             DOM_VK_COMMA         = 0x2C;
public static final int             DOM_VK_COMPOSE       = 0xFF20;
public static final int             DOM_VK_CONTROL       = 0x11;
public static final int             DOM_VK_CONVERT       = 0x1C;
public static final int             DOM_VK_COPY          = 0xFFCD;
public static final int             DOM_VK_CUT           = 0xFFD1;
public static final int             DOM_VK_D             = 0x44;
public static final int             DOM_VK_DEAD_ABOVEDOT = 0x86;
public static final int             DOM_VK_DEAD_ABOVERING = 0x88;
public static final int             DOM_VK_DEAD_ACUTE    = 0x81;
public static final int             DOM_VK_DEAD_BREVE    = 0x85;
public static final int             DOM_VK_DEAD_CARON    = 0x8A;
public static final int             DOM_VK_DEAD_CEDILLA  = 0x8B;
public static final int             DOM_VK_DEAD_CIRCUMFLEX = 0x82;
public static final int             DOM_VK_DEAD_DIAERESIS = 0x87;
public static final int             DOM_VK_DEAD_DOUBLEACUTE = 0x89;
public static final int             DOM_VK_DEAD_GRAVE    = 0x80;
public static final int             DOM_VK_DEAD_IOTA     = 0x8D;
public static final int             DOM_VK_DEAD_MACRON   = 0x84;
public static final int             DOM_VK_DEAD_OGONEK   = 0x8C;
public static final int             DOM_VK_DEAD_SEMIVOICED_SOUND = 0x8F;
public static final int             DOM_VK_DEAD_TILDE    = 0x83;
public static final int             DOM_VK_DEAD_VOICED_SOUND = 0x8E;
public static final int             DOM_VK_DECIMAL       = 0x6E;
public static final int             DOM_VK_DELETE        = 0x7F;
public static final int             DOM_VK_DIVIDE        = 0x6F;
public static final int             DOM_VK_DOLLAR        = 0x0203;
public static final int             DOM_VK_DOWN          = 0x28;
public static final int             DOM_VK_E             = 0x45;
public static final int             DOM_VK_END           = 0x23;
public static final int             DOM_VK_ENTER         = 0x0D;
public static final int             DOM_VK_EQUALS        = 0x3D;
public static final int             DOM_VK_ESCAPE        = 0x1B;
public static final int             DOM_VK_EURO_SIGN     = 0x0204;
public static final int             DOM_VK_EXCLAMATION_MARK = 0x0205;
public static final int             DOM_VK_F             = 0x46;
public static final int             DOM_VK_F1            = 0x70;
public static final int             DOM_VK_F10           = 0x79;
public static final int             DOM_VK_F11           = 0x7A;
public static final int             DOM_VK_F12           = 0x7B;
public static final int             DOM_VK_F13           = 0xF000;
public static final int             DOM_VK_F14           = 0xF001;
public static final int             DOM_VK_F15           = 0xF002;
public static final int             DOM_VK_F16           = 0xF003;
public static final int             DOM_VK_F17           = 0xF004;
public static final int             DOM_VK_F18           = 0xF005;
public static final int             DOM_VK_F19           = 0xF006;
public static final int             DOM_VK_F2            = 0x71;
public static final int             DOM_VK_F20           = 0xF007;
public static final int             DOM_VK_F21           = 0xF008;
public static final int             DOM_VK_F22           = 0xF009;
public static final int             DOM_VK_F23           = 0xF00A;
```

```
public static final int             DOM_VK_F24           = 0xF00B;
public static final int             DOM_VK_F3            = 0x72;
public static final int             DOM_VK_F4            = 0x73;
public static final int             DOM_VK_F5            = 0x74;
public static final int             DOM_VK_F6            = 0x75;
public static final int             DOM_VK_F7            = 0x76;
public static final int             DOM_VK_F8            = 0x77;
public static final int             DOM_VK_F9            = 0x78;
public static final int             DOM_VK_FINAL         = 0x18;
public static final int             DOM_VK_FIND          = 0xFFD0;
public static final int             DOM_VK_FULL_WIDTH    = 0x00F3;
public static final int             DOM_VK_G             = 0x47;
public static final int             DOM_VK_GREATER       = 0xA0;
public static final int             DOM_VK_H             = 0x48;
public static final int             DOM_VK_HALF_WIDTH    = 0x00F4;
public static final int             DOM_VK_HELP          = 0x9C;
public static final int             DOM_VK_HIRAGANA      = 0x00F2;
public static final int             DOM_VK_HOME          = 0x24;
public static final int             DOM_VK_I             = 0x49;
public static final int             DOM_VK_INSERT        = 0x9B;
public static final int             DOM_VK_INVERTED_EXCLAMATION_MARK = 0x0206;
public static final int             DOM_VK_J             = 0x4A;
public static final int             DOM_VK_JAPANESE_HIRAGANA = 0x0104;
public static final int             DOM_VK_JAPANESE_KATAKANA = 0x0103;
public static final int             DOM_VK_JAPANESE_ROMAN = 0x0105;
public static final int             DOM_VK_K             = 0x4B;
public static final int             DOM_VK_KANA          = 0x15;
public static final int             DOM_VK_KANJI         = 0x19;
public static final int             DOM_VK_KATAKANA      = 0x00F1;
public static final int             DOM_VK_KP_DOWN       = 0xE1;
public static final int             DOM_VK_KP_LEFT       = 0xE2;
public static final int             DOM_VK_KP_RIGHT      = 0xE3;
public static final int             DOM_VK_KP_UP         = 0xE0;
public static final int             DOM_VK_L             = 0x4C;
public static final int             DOM_VK_LEFT          = 0x25;
public static final int             DOM_VK_LEFT_PARENTHESIS = 0x0207;
public static final int             DOM_VK_LESS          = 0x99;
public static final int             DOM_VK_M             = 0x4D;
public static final int             DOM_VK_META          = 0x9D;
public static final int             DOM_VK_MINUS         = 0x2D;
public static final int             DOM_VK_MODECHANGE    = 0x1F;
public static final int             DOM_VK_MULTIPLY      = 0x6A;
public static final int             DOM_VK_N             = 0x4E;
public static final int             DOM_VK_NONCONVERT    = 0x1D;
public static final int             DOM_VK_NUM_LOCK      = 0x90;
public static final int             DOM_VK_NUMBER_SIGN   = 0x0208;
public static final int             DOM_VK_NUMPAD0       = 0x60;
public static final int             DOM_VK_NUMPAD1       = 0x61;
public static final int             DOM_VK_NUMPAD2       = 0x62;
public static final int             DOM_VK_NUMPAD3       = 0x63;
public static final int             DOM_VK_NUMPAD4       = 0x64;
public static final int             DOM_VK_NUMPAD5       = 0x65;
public static final int             DOM_VK_NUMPAD6       = 0x66;
public static final int             DOM_VK_NUMPAD7       = 0x67;
public static final int             DOM_VK_NUMPAD8       = 0x68;
public static final int             DOM_VK_NUMPAD9       = 0x69;
public static final int             DOM_VK_O             = 0x4F;
```

org/w3c/dom/events/KeyEvent.java:

```
  public static final int             DOM_VK_OPEN_BRACKET  = 0x5B;
  public static final int             DOM_VK_P             = 0x50;
  public static final int             DOM_VK_PAGE_DOWN     = 0x22;
  public static final int             DOM_VK_PAGE_UP       = 0x21;
  public static final int             DOM_VK_PASTE         = 0xFFCF;
  public static final int             DOM_VK_PAUSE         = 0x13;
  public static final int             DOM_VK_PERIOD        = 0x2E;
  public static final int             DOM_VK_PLUS          = 0x0209;
  public static final int             DOM_VK_PREVIOUS_CANDIDATE = 0x0101;
  public static final int             DOM_VK_PRINTSCREEN   = 0x9A;
  public static final int             DOM_VK_PROPS         = 0xFFCA;
  public static final int             DOM_VK_Q             = 0x51;
  public static final int             DOM_VK_QUOTE         = 0xDE;
  public static final int             DOM_VK_QUOTEDBL      = 0x98;
  public static final int             DOM_VK_R             = 0x52;
  public static final int             DOM_VK_RIGHT         = 0x27;
  public static final int             DOM_VK_RIGHT_PARENTHESIS = 0x020A;
  public static final int             DOM_VK_ROMAN_CHARACTERS = 0x00F5;
  public static final int             DOM_VK_S             = 0x53;
  public static final int             DOM_VK_SCROLL_LOCK   = 0x91;
  public static final int             DOM_VK_SEMICOLON     = 0x3B;
  public static final int             DOM_VK_SEPARATER     = 0x6C;
  public static final int             DOM_VK_SHIFT         = 0x10;
  public static final int             DOM_VK_SLASH         = 0x2F;
  public static final int             DOM_VK_SPACE         = 0x20;
  public static final int             DOM_VK_STOP          = 0xFFC8;
  public static final int             DOM_VK_SUBTRACT      = 0x6D;
  public static final int             DOM_VK_T             = 0x54;
  public static final int             DOM_VK_TAB           = 0x09;
  public static final int             DOM_VK_U             = 0x55;
  public static final int             DOM_VK_UNDEFINED     = 0x0;
  public static final int             DOM_VK_UNDERSCORE    = 0x020B;
  public static final int             DOM_VK_UNDO          = 0xFFCB;
  public static final int             DOM_VK_UP            = 0x26;
  public static final int             DOM_VK_V             = 0x56;
  public static final int             DOM_VK_W             = 0x57;
  public static final int             DOM_VK_X             = 0x58;
  public static final int             DOM_VK_Y             = 0x59;
  public static final int             DOM_VK_Z             = 0x5A;

  public boolean           getCtrlKey();
  public boolean           getShiftKey();
  public boolean           getAltKey();
  public boolean           getMetaKey();
  public int               getKeyCode();
  public int               getCharCode();
  public void              initKeyEvent(String typeArg,
                                        boolean canBubbleArg,
                                        boolean cancelableArg,
                                        boolean ctrlKeyArg,
                                        boolean altKeyArg,
                                        boolean shiftKeyArg,
                                        boolean metaKeyArg,
                                        int keyCodeArg,
                                        int charCodeArg,
                                        AbstractView viewArg);
}
```

org/w3c/dom/events/MutationEvent.java:

```
package org.w3c.dom.events;

import org.w3c.dom.Node;

public interface MutationEvent extends Event {
  public Node               getRelatedNode();
  public String             getPrevValue();
  public String             getNewValue();
  public String             getAttrName();
  public void               initMutationEvent(String typeArg,
                                              boolean canBubbleArg,
                                              boolean cancelableArg,
                                              Node relatedNodeArg,
                                              String prevValueArg,
                                              String newValueArg,
                                              String attrNameArg);
}
```

C.7: Document Object Model Traversal

org/w3c/dom/traversal/NodeIterator.java:

```
package org.w3c.dom.traversal;

import org.w3c.dom.Node;

public interface NodeIterator {
  public int                getWhatToShow();
  // Constants for whatToShow
  public static final int             SHOW_ALL             = 0x0000FFFF;
  public static final int             SHOW_ELEMENT         = 0x00000001;
  public static final int             SHOW_ATTRIBUTE       = 0x00000002;
  public static final int             SHOW_TEXT            = 0x00000004;
  public static final int             SHOW_CDATA_SECTION   = 0x00000008;
  public static final int             SHOW_ENTITY_REFERENCE = 0x00000010;
  public static final int             SHOW_ENTITY          = 0x00000020;
  public static final int             SHOW_PROCESSING_INSTRUCTION = 0x00000040;
  public static final int             SHOW_COMMENT         = 0x00000080;
  public static final int             SHOW_DOCUMENT        = 0x00000100;
  public static final int             SHOW_DOCUMENT_TYPE   = 0x00000200;
  public static final int             SHOW_DOCUMENT_FRAGMENT = 0x00000400;
  public static final int             SHOW_NOTATION        = 0x00000800;

  public NodeFilter         getFilter();
  public boolean            getExpandEntityReferences();
  public Node               nextNode();
  public Node               previousNode();
}
```

org/w3c/dom/traversal/NodeFilter.java:

```
package org.w3c.dom.traversal;

import org.w3c.dom.Node;

public interface NodeFilter {
  // Constants returned by acceptNode
  public static final short           FILTER_ACCEPT        = 1;
  public static final short           FILTER_REJECT        = 2;
  public static final short           FILTER_SKIP          = 3;

  public short              acceptNode(Node n);
}
```

org/w3c/dom/traversal/TreeWalker.java:

```
package org.w3c.dom.traversal;

import org.w3c.dom.Node;

public interface TreeWalker {
  public int                getWhatToShow();
  // Constants for whatToShow
  public static final int             SHOW_ALL             = 0x0000FFFF;
  public static final int             SHOW_ELEMENT         = 0x00000001;
  public static final int             SHOW_ATTRIBUTE       = 0x00000002;
  public static final int             SHOW_TEXT            = 0x00000004;
  public static final int             SHOW_CDATA_SECTION   = 0x00000008;
  public static final int             SHOW_ENTITY_REFERENCE = 0x00000010;
  public static final int             SHOW_ENTITY          = 0x00000020;
  public static final int             SHOW_PROCESSING_INSTRUCTION = 0x00000040;
  public static final int             SHOW_COMMENT         = 0x00000080;
  public static final int             SHOW_DOCUMENT        = 0x00000100;
  public static final int             SHOW_DOCUMENT_TYPE   = 0x00000200;
  public static final int             SHOW_DOCUMENT_FRAGMENT = 0x00000400;
  public static final int             SHOW_NOTATION        = 0x00000800;

  public NodeFilter         getFilter();
  public boolean            getExpandEntityReferences();
  public Node               getCurrentNode();
  public void               setCurrentNode(Node currentNode);
  public Node               parentNode();
  public Node               firstChild();
  public Node               lastChild();
  public Node               previousSibling();
  public Node               nextSibling();
  public Node               previousNode();
  public Node               nextNode();
}
```

org/w3c/dom/traversal/DocumentTraversal.java:

```
package org.w3c.dom.traversal;

import org.w3c.dom.DOMException;
import org.w3c.dom.Node;

public interface DocumentTraversal {
  public NodeIterator       createNodeIterator(Node root,
                                               int whatToShow,
                                               NodeFilter filter,
                                               boolean entityReferenceExpansion);
  public TreeWalker         createTreeWalker(Node root,
                                             int whatToShow,
                                             NodeFilter filter,
                                             boolean entityReferenceExpansion)
                                             throws DOMException;
}
```

C.8: Document Object Model Range

org/w3c/dom/range/RangeException.java:

```
package org.w3c.dom.range;

public abstract class RangeException extends RuntimeException {
  public RangeException(short code, String message) {
     super(message);
     this.code = code;
  }
  public short   code;
  // RangeExceptionCode
  public static final short           BAD_ENDPOINTS_ERR    = 201;
  public static final short           INVALID_NODE_TYPE_ERR = 202;
  public static final short           NULL_NODE_ERR        = 203;

}
```

org/w3c/dom/range/Range.java:

```
package org.w3c.dom.range;

import org.w3c.dom.DOMException;
import org.w3c.dom.DocumentFragment;
import org.w3c.dom.Node;

public interface Range {
  public Node               getStartContainer();
  public int                getStartOffset();
  public Node               getEndContainer();
  public int                getEndOffset();
  public boolean            getIsCollapsed();
  public Node               getCommonAncestorContainer();
  public void               setStart(Node refNode,
```

```
                                    int offset)
                                    throws RangeException;
  public void               setEnd(Node refNode,
                                   int offset)
                                   throws RangeException;
  public void               setStartBefore(Node refNode)
                                    throws RangeException;
  public void               setStartAfter(Node refNode)
                                   throws RangeException;
  public void               setEndBefore(Node refNode)
                                   throws RangeException;
  public void               setEndAfter(Node refNode)
                                   throws RangeException;
  public void               collapse(boolean toStart);
  public void               selectNode(Node refNode)
                                   throws RangeException;
  public void               selectNodeContents(Node refNode)
                                     throws RangeException;

  public static final int StartToStart = 1;
  public static final int StartToEnd   = 2;
  public static final int EndToEnd     = 3;
  public static final int EndToStart   = 4;


  public short              compareEndPoints(int how,
                                    Range sourceRange)
                                    throws DOMException;
  public void               deleteContents()
                                   throws DOMException;
  public DocumentFragment   extractContents()
                                    throws DOMException;
  public DocumentFragment   cloneContents()
                                   throws DOMException;
  public void               insertNode(Node newNode)
                                   throws DOMException, RangeException;
  public void               surroundContents(Node newParent)
                                    throws DOMException, RangeException;
  public Range              cloneRange();
  public String             toString();
}
```

org/w3c/dom/range/DocumentRange.java:

```
package org.w3c.dom.range;

public interface DocumentRange {
  public Range              createRange();
}
```

org/w3c/dom/range/DocumentRange.java:

Appendix D: ECMA Script Language Binding

This appendix contains the complete ECMA Script binding for the Level 2 Document Object Model definitions. The definitions are divided into Core [p.385] , HTML [p.391] , Stylesheets [p.410] , CSS [p.411] , Events [p.424] , Traversal [p.428] , and Range [p.429] .

D.1: Document Object Model Core

Object **DOMString**

Object **DOMImplementation**

The **DOMImplementation** object has the following methods:

hasFeature(feature, version)

This method returns a **boolean**. The **feature** parameter is of type **DOMString**. The **version** parameter is of type **DOMString**.

createDocumentType(qualifiedName, publicID, systemID)

This method returns a **DocumentType**. The **qualifiedName** parameter is of type **DOMString**. The **publicID** parameter is of type **DOMString**. The **systemID** parameter is of type **DOMString**.

createDocument(namespaceURI, qualifiedName, doctype)

This method returns a **Document**. The **namespaceURI** parameter is of type **DOMString**. The **qualifiedName** parameter is of type **DOMString**. The **doctype** parameter is of type **DocumentType**.

Object **DocumentFragment**

DocumentFragment has the all the properties and methods of **Node** as well as the properties and methods defined below.

Object **Document**

Document has the all the properties and methods of **Node** as well as the properties and methods defined below.

The **Document** object has the following properties:

doctype

This property is of type **DocumentType**.

implementation

This property is of type **DOMImplementation**.

documentElement

This property is of type **Element**.

The **Document** object has the following methods:

createElement(tagName)

This method returns a **Element**. The **tagName** parameter is of type **DOMString**.

createDocumentFragment()

This method returns a **DocumentFragment**.

createTextNode(data)

This method returns a **Text**. The **data** parameter is of type **DOMString**.

createComment(data)

This method returns a **Comment**. The **data** parameter is of type **DOMString**.

createCDATASection(data)
This method returns a **CDATASection**. The **data** parameter is of type **DOMString**.
createProcessingInstruction(target, data)
This method returns a **ProcessingInstruction**. The **target** parameter is of type **DOMString**. The **data** parameter is of type **DOMString**.
createAttribute(name)
This method returns a **Attr**. The **name** parameter is of type **DOMString**.
createEntityReference(name)
This method returns a **EntityReference**. The **name** parameter is of type **DOMString**.
getElementsByTagName(tagname)
This method returns a **NodeList**. The **tagname** parameter is of type **DOMString**.
importNode(importedNode, deep)
This method returns a **Node**. The **importedNode** parameter is of type **Node**. The **deep** parameter is of type **boolean**.
createElementNS(namespaceURI, qualifiedName)
This method returns a **Element**. The **namespaceURI** parameter is of type **DOMString**. The **qualifiedName** parameter is of type **DOMString**.
createAttributeNS(namespaceURI, qualifiedName)
This method returns a **Attr**. The **namespaceURI** parameter is of type **DOMString**. The **qualifiedName** parameter is of type **DOMString**.
getElementsByTagNameNS(namespaceURI, localName)
This method returns a **NodeList**. The **namespaceURI** parameter is of type **DOMString**. The **localName** parameter is of type **DOMString**.

Object **Node**

The **Node** object has the following properties:

nodeName
This property is of type **String**.
nodeValue
This property is of type **String**.
nodeType
This property is of type **short**.
parentNode
This property is of type **Node**.
childNodes
This property is of type **NodeList**.
firstChild
This property is of type **Node**.
lastChild
This property is of type **Node**.
previousSibling
This property is of type **Node**.
nextSibling
This property is of type **Node**.
attributes
This property is of type **NamedNodeMap**.

ownerDocument
This property is of type **Document**.
namespaceURI
This property is of type **String**.
prefix
This property is of type **String**.
localName
This property is of type **String**.

The **Node** object has the following methods:

insertBefore(newChild, refChild)
This method returns a **Node**. The **newChild** parameter is of type **Node**. The **refChild** parameter is of type **Node**.
replaceChild(newChild, oldChild)
This method returns a **Node**. The **newChild** parameter is of type **Node**. The **oldChild** parameter is of type **Node**.
removeChild(oldChild)
This method returns a **Node**. The **oldChild** parameter is of type **Node**.
appendChild(newChild)
This method returns a **Node**. The **newChild** parameter is of type **Node**.
hasChildNodes()
This method returns a **boolean**.
cloneNode(deep)
This method returns a **Node**. The **deep** parameter is of type **boolean**.
supports(feature, version)
This method returns a **boolean**. The **feature** parameter is of type **DOMString**. The **version** parameter is of type **DOMString**.

Object **NodeList**

The **NodeList** object has the following properties:

length
This property is of type **int**.

The **NodeList** object has the following methods:

item(index)
This method returns a **Node**. The **index** parameter is of type **unsigned long**.

Object **NamedNodeMap**

The **NamedNodeMap** object has the following properties:

length
This property is of type **int**.

The **NamedNodeMap** object has the following methods:

getNamedItem(name)
This method returns a **Node**. The **name** parameter is of type **DOMString**.
setNamedItem(arg)
This method returns a **Node**. The **arg** parameter is of type **Node**.
removeNamedItem(name)
This method returns a **Node**. The **name** parameter is of type **DOMString**.
item(index)
This method returns a **Node**. The **index** parameter is of type **unsigned long**.

getNamedItemNS(namespaceURI, localName)
This method returns a **Node**. The **namespaceURI** parameter is of type **DOMString**. The **localName** parameter is of type **DOMString**.

removeNamedItemNS(namespaceURI, name)
This method returns a **Node**. The **namespaceURI** parameter is of type **DOMString**. The **name** parameter is of type **DOMString**.

Object **CharacterData**

CharacterData has the all the properties and methods of **Node** as well as the properties and methods defined below.

The **CharacterData** object has the following properties:

data
This property is of type **String**.

length
This property is of type **int**.

The **CharacterData** object has the following methods:

substringData(offset, count)
This method returns a **DOMString**. The **offset** parameter is of type **unsigned long**. The **count** parameter is of type **unsigned long**.

appendData(arg)
This method returns a **void**. The **arg** parameter is of type **DOMString**.

insertData(offset, arg)
This method returns a **void**. The **offset** parameter is of type **unsigned long**. The **arg** parameter is of type **DOMString**.

deleteData(offset, count)
This method returns a **void**. The **offset** parameter is of type **unsigned long**. The **count** parameter is of type **unsigned long**.

replaceData(offset, count, arg)
This method returns a **void**. The **offset** parameter is of type **unsigned long**. The **count** parameter is of type **unsigned long**. The **arg** parameter is of type **DOMString**.

Object **Attr**

Attr has the all the properties and methods of **Node** as well as the properties and methods defined below.

The **Attr** object has the following properties:

name
This property is of type **String**.

specified
This property is of type **boolean**.

value
This property is of type **String**.

ownerElement
This property is of type **Element**.

Object **Element**

Element has the all the properties and methods of **Node** as well as the properties and methods defined below.

The **Element** object has the following properties:

tagName
This property is of type **String**.

The **Element** object has the following methods:

getAttribute(name)
This method returns a **DOMString**. The **name** parameter is of type **DOMString**.

setAttribute(name, value)
This method returns a **void**. The **name** parameter is of type **DOMString**. The **value** parameter is of type **DOMString**.

removeAttribute(name)
This method returns a **void**. The **name** parameter is of type **DOMString**.

getAttributeNode(name)
This method returns a **Attr**. The **name** parameter is of type **DOMString**.

setAttributeNode(newAttr)
This method returns a **Attr**. The **newAttr** parameter is of type **Attr**.

removeAttributeNode(oldAttr)
This method returns a **Attr**. The **oldAttr** parameter is of type **Attr**.

getElementsByTagName(name)
This method returns a **NodeList**. The **name** parameter is of type **DOMString**.

normalize()
This method returns a **void**.

getAttributeNS(namespaceURI, localName)
This method returns a **DOMString**. The **namespaceURI** parameter is of type **DOMString**. The **localName** parameter is of type **DOMString**.

setAttributeNS(namespaceURI, localName, value)
This method returns a **void**. The **namespaceURI** parameter is of type **DOMString**. The **localName** parameter is of type **DOMString**. The **value** parameter is of type **DOMString**.

removeAttributeNS(namespacURI, localName)
This method returns a **void**. The **namespacURI** parameter is of type **DOMString**. The **localName** parameter is of type **DOMString**.

getAttributeNodeNS(namespaceURI, localName)
This method returns a **Attr**. The **namespaceURI** parameter is of type **DOMString**. The **localName** parameter is of type **DOMString**.

setAttributeNodeNS(newAttr)
This method returns a **Attr**. The **newAttr** parameter is of type **Attr**.

getElementsByTagNameNS(namespaceURI, localName)
This method returns a **NodeList**. The **namespaceURI** parameter is of type **DOMString**. The **localName** parameter is of type **DOMString**.

Object **Text**

Text has the all the properties and methods of **CharacterData** as well as the properties and methods defined below.

The **Text** object has the following methods:

splitText(offset)
This method returns a **Text**. The **offset** parameter is of type **unsigned long**.

Object **Comment**

Comment has the all the properties and methods of **CharacterData** as well as the properties and methods defined below.

Object **CDATASection**

CDATASection has the all the properties and methods of **Text** as well as the properties and methods defined below.

Object **DocumentType**

DocumentType has the all the properties and methods of **Node** as well as the properties and methods defined below.

The **DocumentType** object has the following properties:

name

This property is of type **String**.

entities

This property is of type **NamedNodeMap**.

notations

This property is of type **NamedNodeMap**.

publicID

This property is of type **String**.

systemID

This property is of type **String**.

Object **Notation**

Notation has the all the properties and methods of **Node** as well as the properties and methods defined below.

The **Notation** object has the following properties:

publicId

This property is of type **String**.

systemId

This property is of type **String**.

Object **Entity**

Entity has the all the properties and methods of **Node** as well as the properties and methods defined below.

The **Entity** object has the following properties:

publicId

This property is of type **String**.

systemId

This property is of type **String**.

notationName

This property is of type **String**.

Object **EntityReference**

EntityReference has the all the properties and methods of **Node** as well as the properties and methods defined below.

Object **ProcessingInstruction**

ProcessingInstruction has the all the properties and methods of **Node** as well as the properties and methods defined below.

The **ProcessingInstruction** object has the following properties:

target

This property is of type **String**.

data

This property is of type **String**.

D.2: Document Object Model HTML

Object **HTMLDOMImplementation**

HTMLDOMImplementation has the all the properties and methods of **DOMImplementation** as well as the properties and methods defined below.

The **HTMLDOMImplementation** object has the following methods:

createHTMLDocument(title)

This method returns a **HTMLDocument**. The **title** parameter is of type **DOMString**.

Object **HTMLCollection**

The **HTMLCollection** object has the following properties:

length

This property is of type **int**.

The **HTMLCollection** object has the following methods:

item(index)

This method returns a **Node**. The **index** parameter is of type **unsigned long**.

namedItem(name)

This method returns a **Node**. The **name** parameter is of type **DOMString**.

Object **HTMLDocument**

HTMLDocument has the all the properties and methods of **Document** as well as the properties and methods defined below.

The **HTMLDocument** object has the following properties:

title

This property is of type **String**.

referrer

This property is of type **String**.

domain

This property is of type **String**.

URL

This property is of type **String**.

body

This property is of type **HTMLElement**.

images

This property is of type **HTMLCollection**.

applets

This property is of type **HTMLCollection**.

links

This property is of type **HTMLCollection**.

forms

This property is of type **HTMLCollection**.

anchors

This property is of type **HTMLCollection**.

cookie

This property is of type **String**.

The **HTMLDocument** object has the following methods:

open()
This method returns a **void**.
close()
This method returns a **void**.
write(text)
This method returns a **void**. The **text** parameter is of type **DOMString**.
writeln(text)
This method returns a **void**. The **text** parameter is of type **DOMString**.
getElementById(elementId)
This method returns a **Element**. The **elementId** parameter is of type **DOMString**.
getElementsByName(elementName)
This method returns a **NodeList**. The **elementName** parameter is of type **DOMString**.

Object **HTMLElement**

HTMLElement has the all the properties and methods of **Element** as well as the properties and methods defined below.
The **HTMLElement** object has the following properties:
id
This property is of type **String**.
title
This property is of type **String**.
lang
This property is of type **String**.
dir
This property is of type **String**.
className
This property is of type **String**.

Object **HTMLHtmlElement**

HTMLHtmlElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.
The **HTMLHtmlElement** object has the following properties:
version
This property is of type **String**.

Object **HTMLHeadElement**

HTMLHeadElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.
The **HTMLHeadElement** object has the following properties:
profile
This property is of type **String**.

Object **HTMLLinkElement**

HTMLLinkElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.
The **HTMLLinkElement** object has the following properties:
disabled
This property is of type **boolean**.
charset
This property is of type **String**.

href
This property is of type **String**.
hreflang
This property is of type **String**.
media
This property is of type **String**.
rel
This property is of type **String**.
rev
This property is of type **String**.
target
This property is of type **String**.
type
This property is of type **String**.

Object **HTMLTitleElement**

HTMLTitleElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLTitleElement** object has the following properties:

text
This property is of type **String**.

Object **HTMLMetaElement**

HTMLMetaElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLMetaElement** object has the following properties:

content
This property is of type **String**.
httpEquiv
This property is of type **String**.
name
This property is of type **String**.
scheme
This property is of type **String**.

Object **HTMLBaseElement**

HTMLBaseElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLBaseElement** object has the following properties:

href
This property is of type **String**.
target
This property is of type **String**.

Object **HTMLIsIndexElement**

HTMLIsIndexElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLIsIndexElement** object has the following properties:

form
This property is of type **HTMLFormElement**.

prompt
This property is of type **String**.

Object **HTMLStyleElement**

HTMLStyleElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLStyleElement** object has the following properties:

disabled
This property is of type **boolean**.

media
This property is of type **String**.

type
This property is of type **String**.

Object **HTMLBodyElement**

HTMLBodyElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLBodyElement** object has the following properties:

aLink
This property is of type **String**.

background
This property is of type **String**.

bgColor
This property is of type **String**.

link
This property is of type **String**.

text
This property is of type **String**.

vLink
This property is of type **String**.

Object **HTMLFormElement**

HTMLFormElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLFormElement** object has the following properties:

elements
This property is of type **HTMLCollection**.

length
This property is of type **long**.

name
This property is of type **String**.

acceptCharset
This property is of type **String**.

action
This property is of type **String**.

enctype
This property is of type **String**.

method
This property is of type **String**.

target
This property is of type **String**.

The **HTMLFormElement** object has the following methods:

submit()
This method returns a **void**.

reset()
This method returns a **void**.

Object **HTMLSelectElement**

HTMLSelectElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLSelectElement** object has the following properties:

type
This property is of type **String**.

selectedIndex
This property is of type **long**.

value
This property is of type **String**.

length
This property is of type **long**.

form
This property is of type **HTMLFormElement**.

options
This property is of type **HTMLCollection**.

disabled
This property is of type **boolean**.

multiple
This property is of type **boolean**.

name
This property is of type **String**.

size
This property is of type **long**.

tabIndex
This property is of type **long**.

The **HTMLSelectElement** object has the following methods:

add(element, before)
This method returns a **void**. The **element** parameter is of type **HTMLElement**. The **before** parameter is of type **HTMLElement**.

remove(index)
This method returns a **void**. The **index** parameter is of type **long**.

blur()
This method returns a **void**.

focus()
This method returns a **void**.

Object **HTMLOptGroupElement**

HTMLOptGroupElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLOptGroupElement** object has the following properties:

disabled
This property is of type **boolean**.

label
This property is of type **String**.

Object **HTMLOptionElement**

HTMLOptionElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLOptionElement** object has the following properties:

form
This property is of type **HTMLFormElement**.

defaultSelected
This property is of type **boolean**.

text
This property is of type **String**.

index
This property is of type **long**.

disabled
This property is of type **boolean**.

label
This property is of type **String**.

selected
This property is of type **boolean**.

value
This property is of type **String**.

Object **HTMLInputElement**

HTMLInputElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLInputElement** object has the following properties:

defaultValue
This property is of type **String**.

defaultChecked
This property is of type **boolean**.

form
This property is of type **HTMLFormElement**.

accept
This property is of type **String**.

accessKey
This property is of type **String**.

align
This property is of type **String**.

alt
This property is of type **String**.

checked
This property is of type **boolean**.

disabled
This property is of type **boolean**.
maxLength
This property is of type **long**.
name
This property is of type **String**.
readOnly
This property is of type **boolean**.
size
This property is of type **String**.
src
This property is of type **String**.
tabIndex
This property is of type **long**.
type
This property is of type **String**.
useMap
This property is of type **String**.
value
This property is of type **String**.

The **HTMLInputElement** object has the following methods:

blur()
This method returns a **void**.
focus()
This method returns a **void**.
select()
This method returns a **void**.
click()
This method returns a **void**.

Object **HTMLTextAreaElement**

HTMLTextAreaElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLTextAreaElement** object has the following properties:

defaultValue
This property is of type **String**.
form
This property is of type **HTMLFormElement**.
accessKey
This property is of type **String**.
cols
This property is of type **long**.
disabled
This property is of type **boolean**.
name
This property is of type **String**.

readOnly
This property is of type **boolean**.
rows
This property is of type **long**.
tabIndex
This property is of type **long**.
type
This property is of type **String**.
value
This property is of type **String**.

The **HTMLTextAreaElement** object has the following methods:

blur()
This method returns a **void**.
focus()
This method returns a **void**.
select()
This method returns a **void**.

Object **HTMLButtonElement**

HTMLButtonElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLButtonElement** object has the following properties:

form
This property is of type **HTMLFormElement**.
accessKey
This property is of type **String**.
disabled
This property is of type **boolean**.
name
This property is of type **String**.
tabIndex
This property is of type **long**.
type
This property is of type **String**.
value
This property is of type **String**.

Object **HTMLLabelElement**

HTMLLabelElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLLabelElement** object has the following properties:

form
This property is of type **HTMLFormElement**.
accessKey
This property is of type **String**.
htmlFor
This property is of type **String**.

Object **HTMLFieldSetElement**

HTMLFieldSetElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLFieldSetElement** object has the following properties:

form

This property is of type **HTMLFormElement**.

Object **HTMLLegendElement**

HTMLLegendElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLLegendElement** object has the following properties:

form

This property is of type **HTMLFormElement**.

accessKey

This property is of type **String**.

align

This property is of type **String**.

Object **HTMLUListElement**

HTMLUListElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLUListElement** object has the following properties:

compact

This property is of type **boolean**.

type

This property is of type **String**.

Object **HTMLOListElement**

HTMLOListElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLOListElement** object has the following properties:

compact

This property is of type **boolean**.

start

This property is of type **long**.

type

This property is of type **String**.

Object **HTMLDListElement**

HTMLDListElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLDListElement** object has the following properties:

compact

This property is of type **boolean**.

Object **HTMLDirectoryElement**

HTMLDirectoryElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLDirectoryElement** object has the following properties:

compact

This property is of type **boolean**.

Object **HTMLMenuElement**

HTMLMenuElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLMenuElement** object has the following properties:

compact

This property is of type **boolean**.

Object **HTMLLIElement**

HTMLLIElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLLIElement** object has the following properties:

type

This property is of type **String**.

value

This property is of type **long**.

Object **HTMLDivElement**

HTMLDivElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLDivElement** object has the following properties:

align

This property is of type **String**.

Object **HTMLParagraphElement**

HTMLParagraphElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLParagraphElement** object has the following properties:

align

This property is of type **String**.

Object **HTMLHeadingElement**

HTMLHeadingElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLHeadingElement** object has the following properties:

align

This property is of type **String**.

Object **HTMLQuoteElement**

HTMLQuoteElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLQuoteElement** object has the following properties:

cite

This property is of type **String**.

Object **HTMLPreElement**

HTMLPreElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLPreElement** object has the following properties:

width

This property is of type **long**.

Object **HTMLBRElement**

HTMLBRElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLBRElement** object has the following properties:

clear

This property is of type **String**.

Object **HTMLBaseFontElement**

HTMLBaseFontElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLBaseFontElement** object has the following properties:

color

This property is of type **String**.

face

This property is of type **String**.

size

This property is of type **String**.

Object **HTMLFontElement**

HTMLFontElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLFontElement** object has the following properties:

color

This property is of type **String**.

face

This property is of type **String**.

size

This property is of type **String**.

Object **HTMLHRElement**

HTMLHRElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLHRElement** object has the following properties:

align

This property is of type **String**.

noShade

This property is of type **boolean**.

size

This property is of type **String**.

width

This property is of type **String**.

Object **HTMLModElement**

HTMLModElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLModElement** object has the following properties:

cite

This property is of type **String**.

dateTime

This property is of type **String**.

Object **HTMLAnchorElement**

HTMLAnchorElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLAnchorElement** object has the following properties:

accessKey

This property is of type **String**.

charset

This property is of type **String**.

coords

This property is of type **String**.

href

This property is of type **String**.

hreflang

This property is of type **String**.

name

This property is of type **String**.

rel

This property is of type **String**.

rev

This property is of type **String**.

shape

This property is of type **String**.

tabIndex

This property is of type **long**.

target

This property is of type **String**.

type

This property is of type **String**.

The **HTMLAnchorElement** object has the following methods:

blur()

This method returns a **void**.

focus()

This method returns a **void**.

Object **HTMLImageElement**

HTMLImageElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLImageElement** object has the following properties:

lowSrc

This property is of type **String**.

name

This property is of type **String**.

align

This property is of type **String**.

alt

This property is of type **String**.

border
This property is of type **String**.
height
This property is of type **String**.
hspace
This property is of type **String**.
isMap
This property is of type **boolean**.
longDesc
This property is of type **String**.
src
This property is of type **String**.
useMap
This property is of type **String**.
vspace
This property is of type **String**.
width
This property is of type **String**.

Object **HTMLObjectElement**

HTMLObjectElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLObjectElement** object has the following properties:

form
This property is of type **HTMLFormElement**.
code
This property is of type **String**.
align
This property is of type **String**.
archive
This property is of type **String**.
border
This property is of type **String**.
codeBase
This property is of type **String**.
codeType
This property is of type **String**.
data
This property is of type **String**.
declare
This property is of type **boolean**.
height
This property is of type **String**.
hspace
This property is of type **String**.
name
This property is of type **String**.

standby
This property is of type **String**.
tabIndex
This property is of type **long**.
type
This property is of type **String**.
useMap
This property is of type **String**.
vspace
This property is of type **String**.
width
This property is of type **String**.

Object **HTMLParamElement**

HTMLParamElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLParamElement** object has the following properties:

name
This property is of type **String**.
type
This property is of type **String**.
value
This property is of type **String**.
valueType
This property is of type **String**.

Object **HTMLAppletElement**

HTMLAppletElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLAppletElement** object has the following properties:

align
This property is of type **String**.
alt
This property is of type **String**.
archive
This property is of type **String**.
code
This property is of type **String**.
codeBase
This property is of type **String**.
height
This property is of type **String**.
hspace
This property is of type **String**.
name
This property is of type **String**.
object
This property is of type **String**.

vspace
This property is of type **String**.
width
This property is of type **String**.

Object **HTMLMapElement**
HTMLMapElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.
The **HTMLMapElement** object has the following properties:
areas
This property is of type **HTMLCollection**.
name
This property is of type **String**.

Object **HTMLAreaElement**
HTMLAreaElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.
The **HTMLAreaElement** object has the following properties:
accessKey
This property is of type **String**.
alt
This property is of type **String**.
coords
This property is of type **String**.
href
This property is of type **String**.
noHref
This property is of type **boolean**.
shape
This property is of type **String**.
tabIndex
This property is of type **long**.
target
This property is of type **String**.

Object **HTMLScriptElement**
HTMLScriptElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.
The **HTMLScriptElement** object has the following properties:
text
This property is of type **String**.
htmlFor
This property is of type **String**.
event
This property is of type **String**.
charset
This property is of type **String**.
defer
This property is of type **boolean**.

src
This property is of type **String**.
type
This property is of type **String**.

Object **HTMLTableElement**

HTMLTableElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLTableElement** object has the following properties:

caption
This property is of type **HTMLTableCaptionElement**.
tHead
This property is of type **HTMLTableSectionElement**.
tFoot
This property is of type **HTMLTableSectionElement**.
rows
This property is of type **HTMLCollection**.
tBodies
This property is of type **HTMLCollection**.
align
This property is of type **String**.
bgColor
This property is of type **String**.
border
This property is of type **String**.
cellPadding
This property is of type **String**.
cellSpacing
This property is of type **String**.
frame
This property is of type **String**.
rules
This property is of type **String**.
summary
This property is of type **String**.
width
This property is of type **String**.

The **HTMLTableElement** object has the following methods:

createTHead()
This method returns a **HTMLElement**.
deleteTHead()
This method returns a **void**.
createTFoot()
This method returns a **HTMLElement**.
deleteTFoot()
This method returns a **void**.

createCaption()
This method returns a **HTMLElement**.
deleteCaption()
This method returns a **void**.
insertRow(index)
This method returns a **HTMLElement**. The **index** parameter is of type **long**.
deleteRow(index)
This method returns a **void**. The **index** parameter is of type **long**.

Object **HTMLTableCaptionElement**

HTMLTableCaptionElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.
The **HTMLTableCaptionElement** object has the following properties:
align
This property is of type **String**.

Object **HTMLTableColElement**

HTMLTableColElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.
The **HTMLTableColElement** object has the following properties:
align
This property is of type **String**.
ch
This property is of type **String**.
chOff
This property is of type **String**.
span
This property is of type **long**.
vAlign
This property is of type **String**.
width
This property is of type **String**.

Object **HTMLTableSectionElement**

HTMLTableSectionElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.
The **HTMLTableSectionElement** object has the following properties:
align
This property is of type **String**.
ch
This property is of type **String**.
chOff
This property is of type **String**.
vAlign
This property is of type **String**.
rows
This property is of type **HTMLCollection**.
The **HTMLTableSectionElement** object has the following methods:

insertRow(index)
This method returns a **HTMLElement**. The **index** parameter is of type **long**.
deleteRow(index)
This method returns a **void**. The **index** parameter is of type **long**.

Object **HTMLTableRowElement**

HTMLTableRowElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLTableRowElement** object has the following properties:

rowIndex
This property is of type **long**.
sectionRowIndex
This property is of type **long**.
cells
This property is of type **HTMLCollection**.
align
This property is of type **String**.
bgColor
This property is of type **String**.
ch
This property is of type **String**.
chOff
This property is of type **String**.
vAlign
This property is of type **String**.

The **HTMLTableRowElement** object has the following methods:

insertCell(index)
This method returns a **HTMLElement**. The **index** parameter is of type **long**.
deleteCell(index)
This method returns a **void**. The **index** parameter is of type **long**.

Object **HTMLTableCellElement**

HTMLTableCellElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLTableCellElement** object has the following properties:

cellIndex
This property is of type **long**.
abbr
This property is of type **String**.
align
This property is of type **String**.
axis
This property is of type **String**.
bgColor
This property is of type **String**.
ch
This property is of type **String**.

chOff
This property is of type **String**.
colSpan
This property is of type **long**.
headers
This property is of type **String**.
height
This property is of type **String**.
noWrap
This property is of type **boolean**.
rowSpan
This property is of type **long**.
scope
This property is of type **String**.
vAlign
This property is of type **String**.
width
This property is of type **String**.

Object **HTMLFrameSetElement**
HTMLFrameSetElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.
The **HTMLFrameSetElement** object has the following properties:
cols
This property is of type **String**.
rows
This property is of type **String**.

Object **HTMLFrameElement**
HTMLFrameElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.
The **HTMLFrameElement** object has the following properties:
frameBorder
This property is of type **String**.
longDesc
This property is of type **String**.
marginHeight
This property is of type **String**.
marginWidth
This property is of type **String**.
name
This property is of type **String**.
noResize
This property is of type **boolean**.
scrolling
This property is of type **String**.
src
This property is of type **String**.

Object **HTMLIFrameElement**

HTMLIFrameElement has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLIFrameElement** object has the following properties:

align

This property is of type **String**.

frameBorder

This property is of type **String**.

height

This property is of type **String**.

longDesc

This property is of type **String**.

marginHeight

This property is of type **String**.

marginWidth

This property is of type **String**.

name

This property is of type **String**.

scrolling

This property is of type **String**.

src

This property is of type **String**.

width

This property is of type **String**.

D.3: Document Object Model Views

Object **AbstractView**

The **AbstractView** object has the following properties:

document

This property is of type **DocumentView**.

Object **DocumentView**

The **DocumentView** object has the following properties:

defaultView

This property is of type **AbstractView**.

D.4: Document Object Model Stylesheets

Object **StyleSheet**

The **StyleSheet** object has the following properties:

type

This property is of type **String**.

disabled

This property is of type **boolean**.

ownerNode
This property is of type **Node**.
parentStyleSheet
This property is of type **StyleSheet**.
href
This property is of type **String**.
title
This property is of type **String**.
media
This property is of type **MediaList**.

Object **StyleSheetList**

The **StyleSheetList** object has the following properties:

length
This property is of type **int**.

The **StyleSheetList** object has the following methods:

item(index)
This method returns a **StyleSheet**. The **index** parameter is of type **unsigned long**.

Object **MediaList**

The **MediaList** object has the following properties:

cssText
This property is of type **String**.
length
This property is of type **int**.

The **MediaList** object has the following methods:

item(index)
This method returns a **DOMString**. The **index** parameter is of type **unsigned long**.
delete(oldMedium)
This method returns a **void**. The **oldMedium** parameter is of type **DOMString**.
append(newMedium)
This method returns a **void**. The **newMedium** parameter is of type **DOMString**.

Object **LinkStyle**

The **LinkStyle** object has the following properties:

sheet
This property is of type **StyleSheet**.

Object **DocumentStyle**

The **DocumentStyle** object has the following properties:

styleSheets
This property is of type **StyleSheetList**.

D.5: Document Object Model CSS

Object **CSSStyleSheet**

CSSStyleSheet has the all the properties and methods of **StyleSheet** as well as the properties and methods defined below.

The **CSSStyleSheet** object has the following properties:

ownerRule

This property is of type **CSSRule**.

cssRules

This property is of type **CSSRuleList**.

The **CSSStyleSheet** object has the following methods:

insertRule(rule, index)

This method returns a **unsigned long**. The **rule** parameter is of type **DOMString**. The **index** parameter is of type **unsigned long**.

deleteRule(index)

This method returns a **void**. The **index** parameter is of type **unsigned long**.

Object **CSSRuleList**

The **CSSRuleList** object has the following properties:

length

This property is of type **int**.

The **CSSRuleList** object has the following methods:

item(index)

This method returns a **CSSRule**. The **index** parameter is of type **unsigned long**.

Object **CSSRule**

The **CSSRule** object has the following properties:

type

This property is of type **short**.

cssText

This property is of type **String**.

parentStyleSheet

This property is of type **CSSStyleSheet**.

parentRule

This property is of type **CSSRule**.

Object **CSSStyleRule**

CSSStyleRule has the all the properties and methods of **CSSRule** as well as the properties and methods defined below.

The **CSSStyleRule** object has the following properties:

selectorText

This property is of type **String**.

style

This property is of type **CSSStyleDeclaration**.

Object **CSSMediaRule**

CSSMediaRule has the all the properties and methods of **CSSRule** as well as the properties and methods defined below.

The **CSSMediaRule** object has the following properties:

media

This property is of type **MediaList**.

cssRules

This property is of type **CSSRuleList**.

The **CSSMediaRule** object has the following methods:

insertRule(rule, index)
This method returns a **unsigned long**. The **rule** parameter is of type **DOMString**. The **index** parameter is of type **unsigned long**.
deleteRule(index)
This method returns a **void**. The **index** parameter is of type **unsigned long**.

Object **CSSFontFaceRule**

CSSFontFaceRule has the all the properties and methods of **CSSRule** as well as the properties and methods defined below.
The **CSSFontFaceRule** object has the following properties:
style
This property is of type **CSSStyleDeclaration**.

Object **CSSPageRule**

CSSPageRule has the all the properties and methods of **CSSRule** as well as the properties and methods defined below.
The **CSSPageRule** object has the following properties:
selectorText
This property is of type **String**.
style
This property is of type **CSSStyleDeclaration**.

Object **CSSImportRule**

CSSImportRule has the all the properties and methods of **CSSRule** as well as the properties and methods defined below.
The **CSSImportRule** object has the following properties:
href
This property is of type **String**.
media
This property is of type **MediaList**.
styleSheet
This property is of type **CSSStyleSheet**.

Object **CSSCharsetRule**

CSSCharsetRule has the all the properties and methods of **CSSRule** as well as the properties and methods defined below.
The **CSSCharsetRule** object has the following properties:
encoding
This property is of type **String**.

Object **CSSUnknownRule**

CSSUnknownRule has the all the properties and methods of **CSSRule** as well as the properties and methods defined below.

Object **CSSStyleDeclaration**

The **CSSStyleDeclaration** object has the following properties:
cssText
This property is of type **String**.
length
This property is of type **int**.
parentRule
This property is of type **CSSRule**.

The **CSSStyleDeclaration** object has the following methods:

getPropertyValue(propertyName)

This method returns a **DOMString**. The **propertyName** parameter is of type **DOMString**.

getPropertyCSSValue(propertyName)

This method returns a **CSSValue**. The **propertyName** parameter is of type **DOMString**.

removeProperty(propertyName)

This method returns a **DOMString**. The **propertyName** parameter is of type **DOMString**.

getPropertyPriority(propertyName)

This method returns a **DOMString**. The **propertyName** parameter is of type **DOMString**.

setProperty(propertyName, value, priority)

This method returns a **void**. The **propertyName** parameter is of type **DOMString**. The **value** parameter is of type **DOMString**. The **priority** parameter is of type **DOMString**.

item(index)

This method returns a **DOMString**. The **index** parameter is of type **unsigned long**.

Object **CSSValue**

The **CSSValue** object has the following properties:

cssText

This property is of type **String**.

valueType

This property is of type **short**.

Object **CSSPrimitiveValue**

CSSPrimitiveValue has the all the properties and methods of **CSSValue** as well as the properties and methods defined below.

The **CSSPrimitiveValue** object has the following properties:

primitiveType

This property is of type **short**.

The **CSSPrimitiveValue** object has the following methods:

setFloatValue(unitType, floatValue)

This method returns a **void**. The **unitType** parameter is of type **unsigned short**. The **floatValue** parameter is of type **float**.

getFloatValue(unitType)

This method returns a **float**. The **unitType** parameter is of type **unsigned short**.

setStringValue(stringType, stringValue)

This method returns a **void**. The **stringType** parameter is of type **unsigned short**. The **stringValue** parameter is of type **DOMString**.

getStringValue()

This method returns a **DOMString**.

getCounterValue()

This method returns a **Counter**.

getRectValue()

This method returns a **Rect**.

getRGBColorValue()

This method returns a **RGBColor**.

Object **CSSValueList**

CSSValueList has the all the properties and methods of **CSSValue** as well as the properties and methods defined below.

The **CSSValueList** object has the following properties:

length

This property is of type **int**.

The **CSSValueList** object has the following methods:

item(index)

This method returns a **CSSValue**. The **index** parameter is of type **unsigned long**.

Object **RGBColor**

The **RGBColor** object has the following properties:

red

This property is of type **CSSPrimitiveValue**.

green

This property is of type **CSSPrimitiveValue**.

blue

This property is of type **CSSPrimitiveValue**.

Object **Rect**

The **Rect** object has the following properties:

top

This property is of type **CSSPrimitiveValue**.

right

This property is of type **CSSPrimitiveValue**.

bottom

This property is of type **CSSPrimitiveValue**.

left

This property is of type **CSSPrimitiveValue**.

Object **Counter**

The **Counter** object has the following properties:

identifier

This property is of type **String**.

listStyle

This property is of type **String**.

separator

This property is of type **String**.

Object **ViewCSS**

ViewCSS has the all the properties and methods of **AbstractView** as well as the properties and methods defined below.

The **ViewCSS** object has the following methods:

getComputedStyle(elt, pseudoElt)

This method returns a **CSSStyleDeclaration**. The **elt** parameter is of type **Element**. The **pseudoElt** parameter is of type **DOMString**.

Object **DocumentCSS**

DocumentCSS has the all the properties and methods of **DocumentStyle** as well as the properties and methods defined below.

The **DocumentCSS** object has the following methods:

getOverrideStyle(elt, pseudoElt)

This method returns a **CSSStyleDeclaration**. The **elt** parameter is of type **Element**. The **pseudoElt** parameter is of type **DOMString**.

Object **DOMImplementationCSS**

DOMImplementationCSS has the all the properties and methods of **DOMImplementation** as well as the properties and methods defined below.

The **DOMImplementationCSS** object has the following methods:

createCSSStyleSheet(title, media)

This method returns a **CSSStyleSheet**. The **title** parameter is of type **DOMString**. The **media** parameter is of type **DOMString**.

Object **CSS2Azimuth**

CSS2Azimuth has the all the properties and methods of **CSSValue** as well as the properties and methods defined below.

The **CSS2Azimuth** object has the following properties:

azimuthType

This property is of type **short**.

identifier

This property is of type **String**.

behind

This property is of type **boolean**.

The **CSS2Azimuth** object has the following methods:

setAngleValue(uType, fValue)

This method returns a **void**. The **uType** parameter is of type **unsigned short**. The **fValue** parameter is of type **float**.

getAngleValue(uType)

This method returns a **float**. The **uType** parameter is of type **unsigned short**.

setIdentifier(ident, b)

This method returns a **void**. The **ident** parameter is of type **DOMString**. The **b** parameter is of type **boolean**.

Object **CSS2BackgroundPosition**

CSS2BackgroundPosition has the all the properties and methods of **CSSValue** as well as the properties and methods defined below.

The **CSS2BackgroundPosition** object has the following properties:

horizontalType

This property is of type **short**.

verticalType

This property is of type **short**.

horizontalIdentifier

This property is of type **String**.

verticalIdentifier

This property is of type **String**.

The **CSS2BackgroundPosition** object has the following methods:

getHorizontalPosition(hType)

This method returns a **float**. The **hType** parameter is of type **float**.

getVerticalPosition(vType)

This method returns a **float**. The **vType** parameter is of type **float**.

setHorizontalPosition(hType, value)

This method returns a **void**. The **hType** parameter is of type **unsigned short**. The **value** parameter is of type **float**.

setVerticalPosition(vType, value)
This method returns a **void**. The **vType** parameter is of type **unsigned short**. The **value** parameter is of type **float**.
setPositionIdentifier(hIdentifier, vIdentifier)
This method returns a **void**. The **hIdentifier** parameter is of type **DOMString**. The **vIdentifier** parameter is of type **DOMString**.

Object **CSS2BorderSpacing**
CSS2BorderSpacing has the all the properties and methods of **CSSValue** as well as the properties and methods defined below.
The **CSS2BorderSpacing** object has the following properties:
horizontalType
This property is of type **short**.
verticalType
This property is of type **short**.
The **CSS2BorderSpacing** object has the following methods:
getHorizontalSpacing(hType)
This method returns a **float**. The **hType** parameter is of type **float**.
getVerticalSpacing(vType)
This method returns a **float**. The **vType** parameter is of type **float**.
setHorizontalSpacing(hType, value)
This method returns a **void**. The **hType** parameter is of type **unsigned short**. The **value** parameter is of type **float**.
setVerticalSpacing(vType, value)
This method returns a **void**. The **vType** parameter is of type **unsigned short**. The **value** parameter is of type **float**.

Object **CSS2CounterReset**
CSS2CounterReset has the all the properties and methods of **CSSValue** as well as the properties and methods defined below.
The **CSS2CounterReset** object has the following properties:
identifier
This property is of type **String**.
reset
This property is of type **short**.

Object **CSS2CounterIncrement**
CSS2CounterIncrement has the all the properties and methods of **CSSValue** as well as the properties and methods defined below.
The **CSS2CounterIncrement** object has the following properties:
identifier
This property is of type **String**.
increment
This property is of type **short**.

Object **CSS2Cursor**
CSS2Cursor has the all the properties and methods of **CSSValue** as well as the properties and methods defined below.
The **CSS2Cursor** object has the following properties:

uris
This property is of type **CSSValueList**.
predefinedCursor
This property is of type **String**.

Object **CSS2PlayDuring**

CSS2PlayDuring has the all the properties and methods of **CSSValue** as well as the properties and methods defined below.

The **CSS2PlayDuring** object has the following properties:

playDuringType
This property is of type **short**.
playDuringIdentifier
This property is of type **String**.
uri
This property is of type **String**.
mix
This property is of type **boolean**.
repeat
This property is of type **boolean**.

Object **CSS2TextShadow**

The **CSS2TextShadow** object has the following properties:

color
This property is of type **CSSValue**.
horizontal
This property is of type **CSSValue**.
vertical
This property is of type **CSSValue**.
blur
This property is of type **CSSValue**.

Object **CSS2FontFaceSrc**

The **CSS2FontFaceSrc** object has the following properties:

uri
This property is of type **String**.
format
This property is of type **CSSValueList**.
fontFaceName
This property is of type **String**.

Object **CSS2FontFaceWidths**

The **CSS2FontFaceWidths** object has the following properties:

urange
This property is of type **String**.
numbers
This property is of type **CSSValueList**.

Object **CSS2PageSize**

CSS2PageSize has the all the properties and methods of **CSSValue** as well as the properties and methods defined below.

The **CSS2PageSize** object has the following properties:

widthType
This property is of type **short**.

heightType
This property is of type **short**.

identifier
This property is of type **String**.

The **CSS2PageSize** object has the following methods:

getWidth(wType)
This method returns a **float**. The **wType** parameter is of type **float**.

getHeightSize(hType)
This method returns a **float**. The **hType** parameter is of type **float**.

setWidthSize(wType, value)
This method returns a **void**. The **wType** parameter is of type **unsigned short**. The **value** parameter is of type **float**.

setHeightSize(hType, value)
This method returns a **void**. The **hType** parameter is of type **unsigned short**. The **value** parameter is of type **float**.

setIdentifier(ident)
This method returns a **void**. The **ident** parameter is of type **DOMString**.

Object **CSS2Properties**

The **CSS2Properties** object has the following properties:

azimuth
This property is of type **String**.

background
This property is of type **String**.

backgroundAttachment
This property is of type **String**.

backgroundColor
This property is of type **String**.

backgroundImage
This property is of type **String**.

backgroundPosition
This property is of type **String**.

backgroundRepeat
This property is of type **String**.

border
This property is of type **String**.

borderCollapse
This property is of type **String**.

borderColor
This property is of type **String**.

borderSpacing
This property is of type **String**.

borderStyle
This property is of type **String**.

borderTop
This property is of type **String**.
borderRight
This property is of type **String**.
borderBottom
This property is of type **String**.
borderLeft
This property is of type **String**.
borderTopColor
This property is of type **String**.
borderRightColor
This property is of type **String**.
borderBottomColor
This property is of type **String**.
borderLeftColor
This property is of type **String**.
borderTopStyle
This property is of type **String**.
borderRightStyle
This property is of type **String**.
borderBottomStyle
This property is of type **String**.
borderLeftStyle
This property is of type **String**.
borderTopWidth
This property is of type **String**.
borderRightWidth
This property is of type **String**.
borderBottomWidth
This property is of type **String**.
borderLeftWidth
This property is of type **String**.
borderWidth
This property is of type **String**.
bottom
This property is of type **String**.
captionSide
This property is of type **String**.
clear
This property is of type **String**.
clip
This property is of type **String**.
color
This property is of type **String**.
content
This property is of type **String**.

counterIncrement
This property is of type **String**.
counterReset
This property is of type **String**.
cue
This property is of type **String**.
cueAfter
This property is of type **String**.
cueBefore
This property is of type **String**.
cursor
This property is of type **String**.
direction
This property is of type **String**.
display
This property is of type **String**.
elevation
This property is of type **String**.
emptyCells
This property is of type **String**.
cssFloat
This property is of type **String**.
font
This property is of type **String**.
fontFamily
This property is of type **String**.
fontSize
This property is of type **String**.
fontSizeAdjust
This property is of type **String**.
fontStretch
This property is of type **String**.
fontStyle
This property is of type **String**.
fontVariant
This property is of type **String**.
fontWeight
This property is of type **String**.
height
This property is of type **String**.
left
This property is of type **String**.
letterSpacing
This property is of type **String**.
lineHeight
This property is of type **String**.

listStyle
This property is of type **String**.
listStyleImage
This property is of type **String**.
listStylePosition
This property is of type **String**.
listStyleType
This property is of type **String**.
margin
This property is of type **String**.
marginTop
This property is of type **String**.
marginRight
This property is of type **String**.
marginBottom
This property is of type **String**.
marginLeft
This property is of type **String**.
markerOffset
This property is of type **String**.
marks
This property is of type **String**.
maxHeight
This property is of type **String**.
maxWidth
This property is of type **String**.
minHeight
This property is of type **String**.
minWidth
This property is of type **String**.
orphans
This property is of type **String**.
outline
This property is of type **String**.
outlineColor
This property is of type **String**.
outlineStyle
This property is of type **String**.
outlineWidth
This property is of type **String**.
overflow
This property is of type **String**.
padding
This property is of type **String**.
paddingTop
This property is of type **String**.

paddingRight
This property is of type **String**.
paddingBottom
This property is of type **String**.
paddingLeft
This property is of type **String**.
page
This property is of type **String**.
pageBreakAfter
This property is of type **String**.
pageBreakBefore
This property is of type **String**.
pageBreakInside
This property is of type **String**.
pause
This property is of type **String**.
pauseAfter
This property is of type **String**.
pauseBefore
This property is of type **String**.
pitch
This property is of type **String**.
pitchRange
This property is of type **String**.
playDuring
This property is of type **String**.
position
This property is of type **String**.
quotes
This property is of type **String**.
richness
This property is of type **String**.
right
This property is of type **String**.
size
This property is of type **String**.
speak
This property is of type **String**.
speakHeader
This property is of type **String**.
speakNumeral
This property is of type **String**.
speakPunctuation
This property is of type **String**.
speechRate
This property is of type **String**.

stress
This property is of type **String**.
tableLayout
This property is of type **String**.
textAlign
This property is of type **String**.
textDecoration
This property is of type **String**.
textIndent
This property is of type **String**.
textShadow
This property is of type **String**.
textTransform
This property is of type **String**.
top
This property is of type **String**.
unicodeBidi
This property is of type **String**.
verticalAlign
This property is of type **String**.
visibility
This property is of type **String**.
voiceFamily
This property is of type **String**.
volume
This property is of type **String**.
whiteSpace
This property is of type **String**.
widows
This property is of type **String**.
width
This property is of type **String**.
wordSpacing
This property is of type **String**.
zIndex
This property is of type **String**.

Object **HTMLElementCSS**

HTMLElementCSS has the all the properties and methods of **HTMLElement** as well as the properties and methods defined below.

The **HTMLElementCSS** object has the following properties:

style
This property is of type **CSSStyleDeclaration**.

D.6: Document Object Model Events

Object **EventTarget**

The **EventTarget** object has the following methods:

addEventListener(type, listener, useCapture)

This method returns a **void**. The **type** parameter is of type **DOMString**. The **listener** parameter is of type **EventListener**. The **useCapture** parameter is of type **boolean**.

removeEventListener(type, listener, useCapture)

This method returns a **void**. The **type** parameter is of type **DOMString**. The **listener** parameter is of type **EventListener**. The **useCapture** parameter is of type **boolean**.

dispatchEvent(evt)

This method returns a **boolean**. The **evt** parameter is of type **Event**.

Object **EventListener**

The **EventListener** object has the following methods:

handleEvent(evt)

This method returns a **void**. The **evt** parameter is of type **Event**.

Object **Event**

The **Event** object has the following properties:

type

This property is of type **String**.

target

This property is of type **EventTarget**.

currentNode

This property is of type **Node**.

eventPhase

This property is of type **short**.

bubbles

This property is of type **boolean**.

cancelable

This property is of type **boolean**.

The **Event** object has the following methods:

preventBubble()

This method returns a **void**.

preventCapture()

This method returns a **void**.

preventDefault()

This method returns a **void**.

initEvent(eventTypeArg, canBubbleArg, cancelableArg)

This method returns a **void**. The **eventTypeArg** parameter is of type **DOMString**. The **canBubbleArg** parameter is of type **boolean**. The **cancelableArg** parameter is of type **boolean**.

Object **DocumentEvent**

The **DocumentEvent** object has the following methods:

createEvent(type)

This method returns a **Event**. The **type** parameter is of type **DOMString**.

Object **UIEvent**

UIEvent has the all the properties and methods of **Event** as well as the properties and methods defined below.

The **UIEvent** object has the following properties:

view

This property is of type **AbstractView**.

detail

This property is of type **short**.

The **UIEvent** object has the following methods:

initUIEvent(typeArg, canBubbleArg, cancelableArg, viewArg, detailArg)

This method returns a **void**. The **typeArg** parameter is of type **DOMString**. The **canBubbleArg** parameter is of type **boolean**. The **cancelableArg** parameter is of type **boolean**. The **viewArg** parameter is of type **views::AbstractView**. The **detailArg** parameter is of type **unsigned short**.

Object **MouseEvent**

MouseEvent has the all the properties and methods of **UIEvent** as well as the properties and methods defined below.

The **MouseEvent** object has the following properties:

screenX

This property is of type **long**.

screenY

This property is of type **long**.

clientX

This property is of type **long**.

clientY

This property is of type **long**.

ctrlKey

This property is of type **boolean**.

shiftKey

This property is of type **boolean**.

altKey

This property is of type **boolean**.

metaKey

This property is of type **boolean**.

button

This property is of type **short**.

relatedNode

This property is of type **Node**.

The **MouseEvent** object has the following methods:

initMouseEvent(typeArg, canBubbleArg, cancelableArg, viewArg, detailArg, screenXArg, screenYArg, clientXArg, clientYArg, ctrlKeyArg, altKeyArg, shiftKeyArg, metaKeyArg, buttonArg, relatedNodeArg)

This method returns a **void**. The **typeArg** parameter is of type **DOMString**. The **canBubbleArg** parameter is of type **boolean**. The **cancelableArg** parameter is of type **boolean**. The **viewArg** parameter is of type **views::AbstractView**. The **detailArg** parameter is of type **unsigned short**. The **screenXArg** parameter is of type **long**. The

screenYArg parameter is of type **long**. The **clientXArg** parameter is of type **long**. The **clientYArg** parameter is of type **long**. The **ctrlKeyArg** parameter is of type **boolean**. The **altKeyArg** parameter is of type **boolean**. The **shiftKeyArg** parameter is of type **boolean**. The **metaKeyArg** parameter is of type **boolean**. The **buttonArg** parameter is of type **unsigned short**. The **relatedNodeArg** parameter is of type **Node**.

Object **KeyEvent**

KeyEvent has the all the properties and methods of **UIEvent** as well as the properties and methods defined below.

The **KeyEvent** object has the following properties:

ctrlKey

This property is of type **boolean**.

shiftKey

This property is of type **boolean**.

altKey

This property is of type **boolean**.

metaKey

This property is of type **boolean**.

keyCode

This property is of type **int**.

charCode

This property is of type **int**.

The **KeyEvent** object has the following methods:

initKeyEvent(typeArg, canBubbleArg, cancelableArg, ctrlKeyArg, altKeyArg, shiftKeyArg, metaKeyArg, keyCodeArg, charCodeArg, viewArg)

This method returns a **void**. The **typeArg** parameter is of type **DOMString**. The **canBubbleArg** parameter is of type **boolean**. The **cancelableArg** parameter is of type **boolean**. The **ctrlKeyArg** parameter is of type **boolean**. The **altKeyArg** parameter is of type **boolean**. The **shiftKeyArg** parameter is of type **boolean**. The **metaKeyArg** parameter is of type **boolean**. The **keyCodeArg** parameter is of type **unsigned long**. The **charCodeArg** parameter is of type **unsigned long**. The **viewArg** parameter is of type **views::AbstractView**.

Object **MutationEvent**

MutationEvent has the all the properties and methods of **Event** as well as the properties and methods defined below.

The **MutationEvent** object has the following properties:

relatedNode

This property is of type **Node**.

prevValue

This property is of type **String**.

newValue

This property is of type **String**.

attrName

This property is of type **String**.

The **MutationEvent** object has the following methods:

initMutationEvent(typeArg, canBubbleArg, cancelableArg, relatedNodeArg, prevValueArg, newValueArg, attrNameArg)

This method returns a **void**. The **typeArg** parameter is of type **DOMString**. The **canBubbleArg** parameter is of type **boolean**. The **cancelableArg** parameter is of type **boolean**. The **relatedNodeArg** parameter is of type **Node**. The **prevValueArg** parameter is of type **DOMString**. The **newValueArg** parameter is of type **DOMString**. The **attrNameArg** parameter is of type **DOMString**.

D.7: Document Object Model Traversal

Object **NodeIterator**

The **NodeIterator** object has the following properties:

whatToShow

This property is of type **long**.

filter

This property is of type **NodeFilter**.

expandEntityReferences

This property is of type **boolean**.

The **NodeIterator** object has the following methods:

nextNode()

This method returns a **Node**.

previousNode()

This method returns a **Node**.

Object **NodeFilter**

The **NodeFilter** object has the following methods:

acceptNode(n)

This method returns a **short**. The **n** parameter is of type **Node**.

Object **TreeWalker**

The **TreeWalker** object has the following properties:

whatToShow

This property is of type **long**.

filter

This property is of type **NodeFilter**.

expandEntityReferences

This property is of type **boolean**.

currentNode

This property is of type **Node**.

The **TreeWalker** object has the following methods:

parentNode()

This method returns a **Node**.

firstChild()

This method returns a **Node**.

lastChild()

This method returns a **Node**.

previousSibling()

This method returns a **Node**.

nextSibling()
This method returns a **Node**.
previousNode()
This method returns a **Node**.
nextNode()
This method returns a **Node**.

Object **DocumentTraversal**

The **DocumentTraversal** object has the following methods:

createNodeIterator(root, whatToShow, filter, entityReferenceExpansion)
This method returns a **NodeIterator**. The **root** parameter is of type **Node**. The **whatToShow** parameter is of type **long**. The **filter** parameter is of type **NodeFilter**. The **entityReferenceExpansion** parameter is of type **boolean**.
createTreeWalker(root, whatToShow, filter, entityReferenceExpansion)
This method returns a **TreeWalker**. The **root** parameter is of type **Node**. The **whatToShow** parameter is of type **long**. The **filter** parameter is of type **NodeFilter**. The **entityReferenceExpansion** parameter is of type **boolean**.

D.8: Document Object Model Range

Object **Range**

The **Range** object has the following properties:

startContainer
This property is of type **Node**.
startOffset
This property is of type **long**.
endContainer
This property is of type **Node**.
endOffset
This property is of type **long**.
isCollapsed
This property is of type **boolean**.
commonAncestorContainer
This property is of type **Node**.

The **Range** object has the following methods:

setStart(refNode, offset)
This method returns a **void**. The **refNode** parameter is of type **Node**. The **offset** parameter is of type **long**.
setEnd(refNode, offset)
This method returns a **void**. The **refNode** parameter is of type **Node**. The **offset** parameter is of type **long**.
setStartBefore(refNode)
This method returns a **void**. The **refNode** parameter is of type **Node**.
setStartAfter(refNode)
This method returns a **void**. The **refNode** parameter is of type **Node**.

setEndBefore(refNode)
This method returns a **void**. The **refNode** parameter is of type **Node**.
setEndAfter(refNode)
This method returns a **void**. The **refNode** parameter is of type **Node**.
collapse(toStart)
This method returns a **void**. The **toStart** parameter is of type **boolean**.
selectNode(refNode)
This method returns a **void**. The **refNode** parameter is of type **Node**.
selectNodeContents(refNode)
This method returns a **void**. The **refNode** parameter is of type **Node**.
compareEndPoints(how, sourceRange)
This method returns a **short**. The **how** parameter is of type **CompareHow**. The **sourceRange** parameter is of type **Range**.
deleteContents()
This method returns a **void**.
extractContents()
This method returns a **DocumentFragment**.
cloneContents()
This method returns a **DocumentFragment**.
insertNode(newNode)
This method returns a **void**. The **newNode** parameter is of type **Node**.
surroundContents(newParent)
This method returns a **void**. The **newParent** parameter is of type **Node**.
cloneRange()
This method returns a **Range**.
toString()
This method returns a **DOMString**.

Object **DocumentRange**

The **DocumentRange** object has the following methods:

createRange()
This method returns a **Range**.

Acknowledgments

The authors of this specification, members of the DOM Working Group, deserve much credit for their hard work: Lauren Wood (SoftQuad Software Inc., *chair*), Arnaud Le Hors (W3C, *W3C staff contact*), Andy Heninger (IBM), Bill Smith (Sun), Bill Shea (Merrill Lynch), Bob Sutor (IBM), Chris Wilson (Microsoft), Eric Vasilik (Microsoft), Gavin Nicol (INSO), Jared Sorensen (Novell), Joe Kesselman (IBM), Joe Lapp (webMethods), Jonathan Robie (Software AG), Laurence Cable (Sun), Mike Champion (Software AG), Patti Lutsky (Arbortext), Peter Sharpe (SoftQuad Software Inc.), Philippe Le Hégaret (W3C), Ramesh Lekshmynarayanan (Merrill Lynch), Ray Whitmer (iMall), Rich Rollman (Microsoft), Tom Pixley (Netscape), and Vidur Apparao (Netscape).

Thanks to David Brownell (Sun), Don Park (Docuverse), and Miles Sabin (Cromwell Media), members of the DOM Interest Group, for their review and constructive comments, throughout the elaboration of this document.

Thanks to all those who have helped to improve this specification by sending suggestions and corrections.

Thanks to Joe English, author of cost for helping so much in allowing us to develop a framework that made the production of this specification possible.

Thanks to Jan Kärrman, author of html2ps for helping so much in creating the Postscript version of the specification.

Glossary

Editors
Arnaud Le Hors, W3C
Robert S. Sutor, IBM Research (for DOM Level 1)

Several of the following term definitions have been borrowed or modified from similar definitions in other W3C or standards documents. See the links within the definitions for more information.

16-bit unit
The base unit of a `DOMString` [p.19] . Since a `DOMString` is a UTF-16 encoded string, a single character reference may correspond to one or two 16-bit units.

ancestor
An *ancestor* node of any node A is any node above A in a tree model of a document, where "above" means "toward the root."

API
An *API* is an application programming interface, a set of functions or methods used to access some functionality.

child
A *child* is an immediate descendant node of a node.

client application
A [client] application is any software that uses the Document Object Model programming interfaces provided by the hosting implementation to accomplish useful work. Some examples of client applications are scripts within an HTML or XML document.

COM
COM is Microsoft's Component Object Model [COM], a technology for building applications from binary software components.

content model
The *content model* is a simple grammar governing the allowed types of the child elements and the order in which they appear. See *Element Content* in XML [XML].

context
A *context*specifies an access pattern (or path): a set of interfaces which give you a way to interact with a model. For example, imagine a model with different colored arcs connecting data nodes. A context might be a sheet of colored acetate that is placed over the model allowing you a partial view of the total information in the model.

convenience
A *convenience method* is an operation on an object that could be accomplished by a program consisting of more basic operations on the object. Convenience methods are usually provided to make the API easier and simpler to use or to allow specific programs to create more optimized implementations for common operations. A similar definition holds for a *convenience property*.

cooked model
A model for a document that represents the document after it has been manipulated in some way. For example, any combination of any of the following transformations would create a cooked model:

1. Expansion of internal text entities.
2. Expansion of external entities.
3. Model augmentation with style-specified generated text.

4. Execution of style-specified reordering.
5. Execution of scripts.

A browser might only be able to provide access to a cooked model, while an editor might provide access to a cooked or the initial structure model (also known as the *uncooked model*) for a document.

CORBA

CORBA is the *Common Object Request Broker Architecture* from the OMG [CORBA]. This architecture is a collection of objects and libraries that allow the creation of applications containing objects that make and receive requests and responses in a distributed environment.

cursor

A *cursor*is an object representation of a node. It may possess information about context and the path traversed to reach the node.

data model

A *data model* is a collection of descriptions of data structures and their contained fields, together with the operations or functions that manipulate them.

deprecation

When new releases of specifications are released, some older features may be marked as being *deprecated*. This means that new work should not use the features and that although they are supported in the current release, they may not be supported or available in future releases.

descendant

A *descendant* node of any node A is any node below A in a tree model of a document, where "above" means "toward the root."

DOM Level 0

The term "DOM Level 0" refers to a mix (not formally specified) of HTML document functionalities offered by Netscape Navigator version 3.0 and Microsoft Internet Explorer version 3.0. In some cases, attributes or methods have been included for reasons of backward compatibility with "DOM Level 0".

ECMAScript

The programming language defined by the ECMA-262 standard [ECMAScript]. As stated in the standard, the originating technology for ECMAScript was JavaScript [JavaScript]. Note that in the ECMAScript binding, the word "property" is used in the same sense as the IDL term "attribute."

element

Each document contains one or more elements, the boundaries of which are either delimited by start-tags and end-tags, or, for empty elements by an empty-element tag. Each element has a type, identified by name, and may have a set of attributes. Each attribute has a name and a value. See *Logical Structures* in XML [XML].

event propagation, also known as event bubbling

This is the idea that an event can affect one object and a set of related objects. Any of the potentially affected objects can block the event or substitute a different one (upward event propagation). The event is broadcast from the node at which it originates to every parent node.

equivalence

Two nodes are *equivalent* if they have the same node type and same node name. Also, if the nodes contain data, that must be the same. Finally, if the nodes have attributes then collection of attribute names must be the same and the attributes corresponding by name must be equivalent as nodes.
Two nodes are *deeply equivalent* if they are *equivalent*, the child node lists are equivalent are equivalent as `NodeList` [p.42] objects, and the pairs of equivalent attributes must in fact be deeply equivalent.

Two `NodeList` [p.42] objects are *equivalent* if they have the same length, and the nodes corresponding by index are deeply equivalent.
Two `NamedNodeMap` [p.43] objects are *equivalent* if they are have the same length, they have same collection of names, and the nodes corresponding by name in the maps are deeply equivalent.
Two `DocumentType` [p.61] nodes are *equivalent* if they are equivalent as nodes, have the same names, and have equivalent entities and attributes `NamedNodeMap` [p.43] objects.

hosting implementation
A [hosting] implementation is a software module that provides an implementation of the DOM interfaces so that a client application can use them. Some examples of hosting implementations are browsers, editors and document repositories.

HTML
The HyperText Markup Language (*HTML*) is a simple markup language used to create hypertext documents that are portable from one platform to another. HTML documents are SGML documents with generic semantics that are appropriate for representing information from a wide range of applications. [HTML4.0]

IDL
An Interface Definition Language (*IDL*) is used to define the interfaces for accessing and operating upon objects. Examples of IDLs are the Object Management Group's IDL [CORBA], Microsoft's IDL [MIDL], and Sun's Java IDL [JavaIDL].

implementor
Companies, organizations, and individuals that claim to support the Document Object Model as an API for their products.

inheritance
In object-oriented programming, the ability to create new classes (or interfaces) that contain all the methods and properties of another class (or interface), plus additional methods and properties. If class (or interface) D inherits from class (or interface) B, then D is said to be *derived* from B. B is said to be a *base* class (or interface) for D. Some programming languages allow for multiple inheritance, that is, inheritance from more than one class or interface.

initial structure model
Also known as the *raw structure model* or the *uncooked model*, this represents the document before it has been modified by entity expansions, generated text, style-specified reordering, or the execution of scripts. In some implementations, this might correspond to the "initial parse tree" for the document, if it ever exists. Note that a given implementation might not be able to provide access to the initial structure model for a document, though an editor probably would.

interface
An *interface* is a declaration of a set of methods with no information given about their implementation. In object systems that support interfaces and inheritance, interfaces can usually inherit from one another.

language binding
A programming *language binding* for an IDL specification is an implementation of the interfaces in the specification for the given language. For example, a Java language binding for the Document Object Model IDL specification would implement the concrete Java classes that provide the functionality exposed by the interfaces.

local name
A *local name* is the local part of a *qualified name*. This is called the *local part* in Namespaces in XML [Namespaces].

method
A *method* is an operation or function that is associated with an object and is allowed to manipulate the object's data.

model
A *model* is the actual data representation for the information at hand. Examples are the structural model and the style model representing the parse structure and the style information associated with a document. The model might be a tree, or a directed graph, or something else.

namespace prefix
A *namespace prefix* is a string that associates an element or attribute name with a *namespace URI* in XML. See *namespace prefix* in Namespaces in XML [Namespaces].

namespace URI
A *namespace URI* is a URI that identifies an XML namespace. This is called the *namespace name* in Namespaces in XML [Namespaces].

object model
An *object model* is a collection of descriptions of classes or interfaces, together with their member data, member functions, and class-static operations.

parent
A *parent* is an immediate ancestor node of a node.

qualified name
A *qualified name* is the name of an element or attribute defined as the concatenation of a *local name* (as defined in this specification), optionally preceded by a *namespace prefix* and colon character. See *Qualified Names* in Namespaces in XML [Namespaces].

root node
The *root node* is the unique node that is not a child of any other node. All other nodes are children or other descendents of the root node. See *Well-Formed XML Documents* in XML [XML].

sibling
Two nodes are *siblings* if they have the same parent node.

string comparison
When string matching is required, it is to occur as though the comparison was between 2 sequences of code points from the Unicode 2.0 standard.

tag valid document
A document is *tag valid* if all begin and end tags are properly balanced and nested.

type valid document
A document is *type valid* if it conforms to an explicit DTD.

uncooked model
See initial structure model.

well-formed document
A document is *well-formed* if it is tag valid and entities are limited to single elements (i.e., single sub-trees).

XML
Extensible Markup Language (*XML*) is an extremely simple dialect of SGML which is completely described in this document. The goal is to enable generic SGML to be served, received, and processed on the Web in the way that is now possible with HTML. XML has been designed for ease of implementation and for interoperability with both SGML and HTML. [XML]

XML namespace
An *XML namespace* is a collection of names, identified by a URI reference [RFC2396], which are

used in XML documents as element types and attribute names. [Namespaces]

References

CSS2
W3C (World Wide Web Consortium) *Cascading Style Sheets, level 2 Specification*. See http://www.w3.org/TR/REC-CSS2.

COM
Microsoft *The Component Object Model*. See http://www.microsoft.com/com.

CORBA
OMG (Object Management Group) *The Common Object Request Broker: Architecture and Specification*. See http://www.omg.org/corba/corbiiop.htm.

DOM-Level-1
W3C (World Wide Web Consortium) *DOM Level 1 Specification*. See http://www.w3.org/TR/REC-DOM-Level-1.

ECMAScript
ECMA (European Computer Manufacturers Association) *ECMAScript Language Specification*. See http://www.ecma.ch/stand/ecma-262.htm.

HTML4.0
W3C (World Wide Web Consortium) *HTML 4.0 Specification*. See http://www.w3.org/TR/REC-html40.

Infoset
W3C (World Wide Web Consortium) *XML Information Set*. See http://www.w3.org/TR/1999/WD-xml-infoset-19990517.

Java
Sun *The Java Language Specification*. See http://java.sun.com/docs/books/jls.

JavaIDL
Sun *Java IDL*. See http://java.sun.com/products/jdk/1.2/docs/guide/idl.

JavaScript
Netscape *JavaScript Resources*. See http://developer.netscape.com/one/javascript/resources.html.

MIDL
Microsoft *MIDL Language Reference*. See http://msdn.microsoft.com/library/sdkdoc/midl/mi-laref_1r1h.htm.

Namespaces
W3C (World Wide Web Consortium) *Namespaces in XML*. See http://www.w3.org/TR/REC-xml-names.

RFC2396
IETF (Internet Engineering Task Force) *RFC 2396: Uniform Resource Identifiers (URI): Generic Syntax*, eds. T. Berners-Lee, R. Fielding, L. Masinter. August 1998.

Unicode
The Unicode Consortium. *The Unicode Standard, Version 2.0*. Reading, Mass.: Addison-Wesley Developers Press, 1996.

XML
W3C (World Wide Web Consortium) *Extensible Markup Language (XML) 1.0*. See http://www.w3.org/TR/REC-xml.

Objects Index

Document Object Model Core

Attr [p.50]
CDATASection [p.61]
CharacterData [p.46]
Comment [p.60]
DOMException [p.21]
DOMImplementation [p.22]
DOMString [p.19]
Document [p.25]
DocumentFragment [p.24]
DocumentType [p.61]
Element [p.52]
Entity [p.63]
EntityReference [p.64]
ExceptionCode [p.21]
NamedNodeMap [p.43]
Node [p.34]
NodeList [p.42]
Notation [p.62]
ProcessingInstruction [p.64]
Text [p.59]

Document Object Model HTML

HTMLAnchorElement [p.97]
HTMLAppletElement [p.102]
HTMLAreaElement [p.104]
HTMLBRElement [p.94]
HTMLBaseElement [p.77]
HTMLBaseFontElement [p.95]
HTMLBodyElement [p.79]
HTMLButtonElement [p.89]
HTMLCollection [p.69]
HTMLDListElement [p.92]
HTMLDOMImplementation [p.68]
HTMLDirectoryElement [p.92]
HTMLDivElement [p.93]
HTMLDocument [p.70]
HTMLElement [p.74]
HTMLFieldSetElement [p.90]
HTMLFontElement [p.95]
HTMLFormElement [p.80]
HTMLFrameElement [p.114]
HTMLFrameSetElement [p.114]
HTMLHRElement [p.96]
HTMLHeadElement [p.75]
HTMLHeadingElement [p.94]
HTMLHtmlElement [p.75]
HTMLIFrameElement [p.115]
HTMLImageElement [p.98]
HTMLInputElement [p.84]
HTMLIsIndexElement [p.78]
HTMLLIElement [p.93]
HTMLLabelElement [p.90]

HTMLLegendElement [p.90]
HTMLLinkElement [p.76]
HTMLMapElement [p.103]
HTMLMenuElement [p.92]
HTMLMetaElement [p.77]
HTMLModElement [p.96]
HTMLOListElement [p.91]
HTMLObjectElement [p.100]
HTMLOptGroupElement [p.83]
HTMLOptionElement [p.83]
HTMLParagraphElement [p.93]
HTMLParamElement [p.101]
HTMLPreElement [p.94]
HTMLQuoteElement [p.94]
HTMLScriptElement [p.105]
HTMLSelectElement [p.81]
HTMLStyleElement [p.78]
HTMLTableCaptionElement [p.109]
HTMLTableCellElement [p.112]
HTMLTableColElement [p.109]
HTMLTableElement [p.105]
HTMLTableRowElement [p.111]
HTMLTableSectionElement [p.110]
HTMLTextAreaElement [p.87]
HTMLTitleElement [p.77]
HTMLUListElement [p.91]

Document Object Model Views

AbstractView [p.117]
DocumentView [p.117]

Document Object Model StyleSheets

DocumentStyle [p.123]
LinkStyle [p.123]
MediaList [p.121]
StyleSheet [p.119]
StyleSheetList [p.120]

Document Object Model CSS

CSS2Azimuth [p.153] CSS2BackgroundPosition [p.156] CSS2BorderSpacing [p.159]
CSS2CounterIncrement [p.162] CSS2CounterReset [p.161] CSS2Cursor [p.162]
CSS2FontFaceSrc [p.166] CSS2FontFaceWidths [p.167] CSS2PageSize [p.168]
CSS2PlayDuring [p.163] CSS2Properties [p.171] CSS2TextShadow [p.164]
CSSCharsetRule [p.134] CSSException [p.126] CSSExceptionCode [p.126]
CSSFontFaceRule [p.132] CSSImportRule [p.133] CSSMediaRule [p.131]
CSSPageRule [p.133] CSSPrimitiveValue [p.139] CSSRule [p.129]
CSSRuleList [p.128] CSSStyleDeclaration [p.134] CSSStyleRule [p.130]
CSSStyleSheet [p.126] CSSUnknownRule [p.134] CSSValue [p.138]
CSSValueList [p.145] Counter [p.147] DOMImplementationCSS [p.149]
DocumentCSS [p.148] HTMLElementCSS [p.208] RGBColor [p.146]
Rect [p.146] ViewCSS [p.147]

Document Object Model Events

DocumentEvent [p.217] Event [p.215] EventListener [p.214]
EventTarget [p.211] KeyEvent [p.225] MouseEvent [p.221]
MutationEvent [p.239] UIEvent [p.218]

Document Object Model Traversal

DocumentTraversal [p.260] NodeFilter [p.255] NodeIterator [p.252]
TreeWalker [p.256]

Document Object Model Range

DocumentRange [p.284] Range [p.276] RangeException [p.285]
RangeExceptionCode [p.285]

Index

abbr 113
acceptCharset 80
action 80
align 85, 91, 93, 93, 94, 96, 99, 100, 102, 106, 109, 109, 110, 111, 113, 115
altKey 222, 237
appendChild 40
archive 100, 103
Attr 50
attrName 240
azimuthType 153
backgroundColor 181
backgroundRepeat 182
bgColor 79, 106, 111, 113
body 71
borderBottomColor 185
borderCollapse 183
borderLeftColor 185
borderRight 184
borderRightWidth 186
borderTop 183
borderTopWidth 186
bubbles 216
cancelable 216
CAPTURING_PHASE 215
cellIndex 113
cellSpacing 107
CharacterData 46
CHARSET_RULE 129
chOff 109, 110, 112, 113
clear 95, 188
clientY 222
cloneNode 41
code 100, 103
collapse 280
colSpan 113
commonAncestorContainer 277
CompareHow 277
AbstractView 117
acceptNode 256
add 82
aLink 79
anchors 71
appendData 48
areas 104
ATTRIBUTE_NODE 35
axis 113
background 79, 181
backgroundImage 182
BAD_ENDPOINTS_ERR 285
blue 146
border 99, 100, 107, 182
borderBottomStyle 186
borderColor 183
borderLeftStyle 186
borderRightColor 185
borderSpacing 183
borderTopColor 184
borderWidth 187
BUBBLING_PHASE 215
caption 106
CDATA_SECTION_NODE 35
cellPadding 107
ch 109, 110, 111, 113
charCode 237
checked 86
cite 94, 96
click 87
clip 188
cloneRange 284
codeBase 100, 103
color 95, 95, 165, 188
Comment 60
compact 91, 92, 92, 92, 93
content 77, 188
accept 85
accessKey 85, 88, 89, 90, 91, 97, 104
addEventListener 212
alt 85, 99, 103, 104
append 122
applets 71
AT_TARGET 215
attributes 37
azimuth 181
backgroundAttachment 181
backgroundPosition 182
behind 154
blur 165, 83, 87, 88, 98
borderBottom 184
borderBottomWidth 187
borderLeft 184
borderLeftWidth 187
borderRightStyle 185
borderStyle 183
borderTopStyle 185
bottom 147, 187
button 222
captionSide 187
CDATASection 61
cells 111
CHAR_UNDEFINED 229
charset 76, 97, 105
childNodes 37
className 75
clientX 222
cloneContents 282
close 72
codeType 101
cols 88, 114
COMMENT_NODE 35
compareEndPoints 281
cookie 71

coords 97, 104
Counter 147
counterIncrement 189
counterReset 189
createAttribute 28
createAttributeNS 32
createCaption 108
createCDATASection 27
createComment 27
createCSSStyleSheet 164
createDocument 24
createDocumentFragment 27
createDocumentType 23
createElement 26
createElementNS 31
createEntityReference 29
createEvent 217
createHTMLDocument 68
createNodeIterator 261
createProcessingInstruction 28
createRange 285
createTextNode 27
createTFoot 107
createTHead 107
createTreeWalker 262
CSS2Azimuth 153
CSS2BackgroundPosition 156
CSS2BorderSpacing 159
CSS2CounterIncrement 162
CSS2CounterReset 161
CSS2Cursor 162
CSS2FontFaceSrc 166
CSS2FontFaceWidths 167
CSS2PageSize 168
CSS2PlayDuring 163
CSS2Properties 171
CSS2TextShadow 164
CSS_ATTR 140
CSS_CM 140
CSS_COUNTER 140
CSS_CUSTOM 138
CSS_DEG 140
CSS_DIMENSION 140
CSS_EMS 140
CSS_EXS 140
CSS_GRAD 140
CSS_HZ 140
CSS_IDENT 140
CSS_IN 140
CSS_INHERIT 138
CSS_KHZ 140
CSS_MM 140
CSS_MS 140
CSS_NUMBER 140
CSS_PC 140
CSS_PERCENTAGE 140
CSS_PRIMITIVE_VALUE 138
CSS_PT 140
CSS_PX 140
CSS_RAD 140
CSS_RECT 140
CSS_RGBCOLOR 140
CSS_S 140
CSS_STRING 140
CSS_UNKNOWN 140
CSS_URI 140
CSS_VALUE_LIST 138
CSSCharsetRule 134
CSSException 126
cssFloat 191
CSSFontFaceRule 132
CSSImportRule 133
CSSMediaRule 131
CSSPageRule 133
CSSPrimitiveValue 139
CSSRule 129
CSSRuleList 128
cssRules 127, 131
CSSStyleDeclaration 134
CSSStyleRule 130
CSSStyleSheet 126
cssText 121, 130, 135, 139
CSSUnknownRule 134
CSSValue 138
CSSValueList 145
ctrlKey 222, 237
cue 189
cueAfter 189
cueBefore 189
currentNode 216, 256
cursor 190
data 47, 65, 101
dateTime 97
declare 101
defaultChecked 85
defaultSelected 84
defaultValue 85, 88
defaultView 117
defer 105
delete 122
deleteCaption 108
deleteCell 112
deleteContents 281
deleteData 49
deleteRow 108, 111
deleteRule 127, 132
deleteTFoot 108
deleteTHead 107
detail 218
dir 75
direction 190
disabled 76, 78, 82, 83, 84, 86, 88, 89, 120
dispatchEvent 213
display 190
doctype 26
document 117
Document 25

DOCUMENT_FRAGMENT_NODE 35
DOCUMENT_NODE 35
DOCUMENT_TYPE_NODE 35
DocumentCSS 148
documentElement 26
DocumentEvent 217
DocumentFragment 24
DocumentRange 284
DocumentStyle 123
DocumentTraversal 260
DocumentType 61
DocumentView 117
DOM_VK_0 229
DOM_VK_1 229
DOM_VK_2 229
DOM_VK_3 229
DOM_VK_4 229
DOM_VK_5 229
DOM_VK_6 229
DOM_VK_7 229
DOM_VK_8 229
DOM_VK_9 229
DOM_VK_A 229
DOM_VK_ACCEPT 229
DOM_VK_ADD 229
DOM_VK_AGAIN 229
DOM_VK_ALL_CANDIDATES 229
DOM_VK_ALPHANUMERIC 229
DOM_VK_ALT 229
DOM_VK_ALT_GRAPH 229
DOM_VK_AMPERSAND 229
DOM_VK_ASTERISK 229
DOM_VK_AT 229
DOM_VK_B 229
DOM_VK_BACK_QUOTE 229
DOM_VK_BACK_SLASH 229
DOM_VK_BACK_SPACE 229
DOM_VK_BRACELEFT 229
DOM_VK_BRACERIGHT 229
DOM_VK_C 229
DOM_VK_CANCEL 229
DOM_VK_CAPS_LOCK 229
DOM_VK_CIRCUMFLEX 229
DOM_VK_CLEAR 229
DOM_VK_CLOSE_BRACKET 229
DOM_VK_CODE_INPUT 229
DOM_VK_COLON 229
DOM_VK_COMMA 229
DOM_VK_COMPOSE 229
DOM_VK_CONTROL 229
DOM_VK_CONVERT 229
DOM_VK_COPY 229
DOM_VK_CUT 229
DOM_VK_D 229
DOM_VK_DEAD_ABOVEDOT 229
DOM_VK_DEAD_ABOVERING 229
DOM_VK_DEAD_ACUTE 229
DOM_VK_DEAD_BREVE 229
DOM_VK_DEAD_CARON 229
DOM_VK_DEAD_CEDILLA 229
DOM_VK_DEAD_CIRCUMFLEX 229
DOM_VK_DEAD_DIAERESIS 229
DOM_VK_DEAD_DOUBLEACUTE 229
DOM_VK_DEAD_GRAVE 229
DOM_VK_DEAD_IOTA 229
DOM_VK_DEAD_MACRON 229
DOM_VK_DEAD_OGONEK 229
DOM_VK_DEAD_SEMIVOICED_SOUND 229
DOM_VK_DEAD_TILDE 229
DOM_VK_DEAD_VOICED_SOUND 229
DOM_VK_DECIMAL 229
DOM_VK_DELETE 229
DOM_VK_DIVIDE 229
DOM_VK_DOLLAR 229
DOM_VK_DOWN 229
DOM_VK_E 229
DOM_VK_END 229
DOM_VK_ENTER 229
DOM_VK_EQUALS 229
DOM_VK_ESCAPE 229
DOM_VK_EURO_SIGN 229
DOM_VK_EXCLAMATION_MARK 229
DOM_VK_F 229
DOM_VK_F1 229
DOM_VK_F10 229
DOM_VK_F11 229
DOM_VK_F12 229
DOM_VK_F13 229
DOM_VK_F14 229
DOM_VK_F15 229
DOM_VK_F16 229
DOM_VK_F17 229
DOM_VK_F18 229
DOM_VK_F19 229
DOM_VK_F2 229
DOM_VK_F20 229
DOM_VK_F21 229
DOM_VK_F22 229
DOM_VK_F23 229
DOM_VK_F24 229
DOM_VK_F3 229
DOM_VK_F4 229
DOM_VK_F5 229
DOM_VK_F6 229
DOM_VK_F7 229
DOM_VK_F8 229
DOM_VK_F9 229
DOM_VK_FINAL 229
DOM_VK_FIND 229
DOM_VK_FULL_WIDTH 229
DOM_VK_G 229
DOM_VK_GREATER 229
DOM_VK_H 229
DOM_VK_HALF_WIDTH 229

DOM_VK_HELP 229
DOM_VK_HIRAGANA 229
DOM_VK_HOME 229
DOM_VK_I 229
DOM_VK_INSERT 229
DOM_VK_INVERTED_EXCLAMATION_MARK 229
DOM_VK_J 229
DOM_VK_JAPANESE_HIRAGANA 229
DOM_VK_JAPANESE_KATAKANA 229
DOM_VK_JAPANESE_ROMAN 229
DOM_VK_K 229
DOM_VK_KANA 229
DOM_VK_KANJI 229
DOM_VK_KATAKANA 229
DOM_VK_KP_DOWN 229
DOM_VK_KP_LEFT 229
DOM_VK_KP_RIGHT 229
DOM_VK_KP_UP 229
DOM_VK_L 229
DOM_VK_LEFT 229
DOM_VK_LEFT_PARENTHESIS 229
DOM_VK_LESS 229
DOM_VK_M 229
DOM_VK_META 229
DOM_VK_MINUS 229
DOM_VK_MODECHANGE 229
DOM_VK_MULTIPLY 229
DOM_VK_N 229
DOM_VK_NONCONVERT 229
DOM_VK_NUM_LOCK 229
DOM_VK_NUMBER_SIGN 229
DOM_VK_NUMPAD0 229
DOM_VK_NUMPAD1 229
DOM_VK_NUMPAD2 229
DOM_VK_NUMPAD3 229
DOM_VK_NUMPAD4 229
DOM_VK_NUMPAD5 229
DOM_VK_NUMPAD6 229
DOM_VK_NUMPAD7 229
DOM_VK_NUMPAD8 229
DOM_VK_NUMPAD9 229
DOM_VK_O 229
DOM_VK_OPEN_BRACKET 229
DOM_VK_P 229
DOM_VK_PAGE_DOWN 229
DOM_VK_PAGE_UP 229
DOM_VK_PASTE 229
DOM_VK_PAUSE 229
DOM_VK_PERIOD 229
DOM_VK_PLUS 229
DOM_VK_PREVIOUS_CANDIDATE 229
DOM_VK_PRINTSCREEN 229
DOM_VK_PROPS 229
DOM_VK_Q 229
DOM_VK_QUOTE 229
DOM_VK_QUOTEDBL 229
DOM_VK_R 229
DOM_VK_RIGHT 229
DOM_VK_RIGHT_PARENTHESIS 229
DOM_VK_ROMAN_CHARACTERS 229
DOM_VK_S 229
DOM_VK_SCROLL_LOCK 229
DOM_VK_SEMICOLON 229
DOM_VK_SEPARATER 229
DOM_VK_SHIFT 229
DOM_VK_SLASH 229
DOM_VK_SPACE 229
DOM_VK_STOP 229
DOM_VK_SUBTRACT 229
DOM_VK_T 229
DOM_VK_TAB 229
DOM_VK_U 229
DOM_VK_UNDEFINED 229
DOM_VK_UNDERSCORE 229
DOM_VK_UNDO 229
DOM_VK_UP 229
DOM_VK_V 229
DOM_VK_W 229
DOM_VK_X 229
DOM_VK_Y 229
DOM_VK_Z 229
domain 71
DOMException 21
DOMImplementation 22
DOMImplementationCSS 149
DOMString 19
DOMSTRING_SIZE_ERR 21
Element 52
ELEMENT_NODE 35
elements 80
elevation 190
emptyCells 191
encoding 134
enctype 80
endContainer 277
endOffset 277
entities 62
Entity 63
ENTITY_NODE 35
ENTITY_REFERENCE_NODE 35
EntityReference 64
Event 215
event 105
EventListener 214
eventPhase 216
EventTarget 211
expandEntityReferences 252, 256
extractContents 281
face 95, 95
filter 252, 256
FILTER_ACCEPT 255
FILTER_REJECT 255
FILTER_SKIP 255
firstChild 37, 259
focus 83, 87, 89, 98
font 191
FONT_FACE_RULE 129

fontFaceName 167
fontFamily 191
fontSize 191
fontSizeAdjust 192
fontStretch 192
fontStyle 192
fontVariant 192
fontWeight 193
form 78, 82, 84, 85, 88, 89, 90, 90, 91, 100
format 167
forms 71
frame 107
frameBorder 114, 115
getAngleValue 155
getAttribute 53
getAttributeNode 54
getAttributeNodeNS 58
getAttributeNS 56
getComputedStyle 148
getCounterValue 144
getElementById 72
getElementsByName 73
getElementsByTagName 29, 55
getElementsByTagNameNS 33, 59
getFloatValue 142
getHeightSize 169
getHorizontalPosition 157
getHorizontalSpacing 159
getNamedItem 43
getNamedItemNS 45
getOverrideStyle 148
getPropertyCSSValue 136
getPropertyPriority 137
getPropertyValue 136
getRectValue 144
getRGBColorValue 145
getStringValue 144
getVerticalPosition 157
getVerticalSpacing 160
getWidth 169
green 146
handleEvent 214
hasChildNodes 41
hasFeature 23
headers 113
height 99, 101, 103, 113, 115, 193
heightType 169
HIERARCHY_REQUEST_ERR 21
horizontal 165
horizontalIdentifier 156
horizontalType 156, 159
href 76, 78, 97, 104, 120, 134
hreflang 76, 97
hspace 99, 101, 103
HTMLAnchorElement 97
HTMLAppletElement 102
HTMLAreaElement 104
HTMLBaseElement 77
HTMLBaseFontElement 95
HTMLBodyElement 79
HTMLBRElement 94
HTMLButtonElement 89
HTMLCollection 69
HTMLDirectoryElement 92
HTMLDivElement 93
HTMLDListElement 92
HTMLDocument 70
HTMLDOMImplementation 68
HTMLElement 74
HTMLElementCSS 208
HTMLFieldSetElement 90
HTMLFontElement 95
htmlFor 90, 105
HTMLFormElement 80
HTMLFrameElement 114
HTMLFrameSetElement 114
HTMLHeadElement 75
HTMLHeadingElement 94
HTMLHRElement 96
HTMLHtmlElement 75
HTMLIFrameElement 115
HTMLImageElement 98
HTMLInputElement 84
HTMLIsIndexElement 78
HTMLLabelElement 90
HTMLLegendElement 90
HTMLLIElement 93
HTMLLinkElement 76
HTMLMapElement 103
HTMLMenuElement 92
HTMLMetaElement 77
HTMLModElement 96
HTMLObjectElement 100
HTMLOListElement 91
HTMLOptGroupElement 83
HTMLOptionElement 83
HTMLParagraphElement 93
HTMLParamElement 101
HTMLPreElement 94
HTMLQuoteElement 94
HTMLScriptElement 105
HTMLSelectElement 81
HTMLStyleElement 78
HTMLTableCaptionElement 109
HTMLTableCellElement 112
HTMLTableColElement 109
HTMLTableElement 105
HTMLTableRowElement 111
HTMLTableSectionElement 110
HTMLTextAreaElement 87
HTMLTitleElement 77
HTMLUListElement 91
httpEquiv 77
id 75
identifier 147, 154, 161, 162, 169
images 71
implementation 26
IMPORT_RULE 129
importNode 30
increment 162

index 84
INDEX_SIZE_ERR 21
initEvent 217
initKeyEvent 237
initMouseEvent 222
initMutationEvent 240
initUIEvent 219
insertBefore 38
insertCell 112
insertData 48
insertNode 282
insertRow 108, 110
insertRule 127, 131
INUSE_ATTRIBUTE_ERR 21
INVALID_CHARACTER_ERR 21
INVALID_MODIFICATION_ERR 126
INVALID_NODE_TYPE_ERR 285
isCollapsed 277
isMap 99
item 42, 45, 69, 121, 122, 128, 138, 145
keyCode 237
KeyEvent 225
label 83, 84
lang 75
lastChild 37, 259
left 147, 193
length 42, 43, 47, 69, 80, 81, 120, 122, 128, 135, 145
letterSpacing 193
lineHeight 193
link 79
links 71
LinkStyle 123
listStyle 147, 194
listStyleImage 194
listStylePosition 194
listStyleType 194
localName 38
longDesc 99, 114, 116
lowSrc 99
margin 195
marginBottom 195
marginHeight 115, 116
marginLeft 195
marginRight 195
marginTop 195
marginWidth 115, 116
markerOffset 196
marks 196
maxHeight 196
maxLength 86
maxWidth 196
media 76, 79, 120, 131, 134
MEDIA_RULE 129
MediaList 121
metaKey 222, 237
method 80
minHeight 197
minWidth 197
mix 163
MouseEvent 221
multiple 82
MutationEvent 239
name 51, 62, 77, 80, 82, 86, 88, 89, 97, 99, 101, 102, 103, 104, 115, 116
namedItem 69
NamedNodeMap 43
namespaceURI 37
newValue 240
nextNode 254, 260
nextSibling 37, 260
NO_DATA_ALLOWED_ERR 21
NO_MODIFICATION_ALLOWED_ERR 21
Node 34
NodeFilter 255
NodeIterator 252
NodeList 42
nodeName 36
nodeType 37
nodeValue 36
noHref 104
noResize 115
normalize 56
noShade 96
NOT_FOUND_ERR 21
NOT_SUPPORTED_ERR 21
Notation 62
NOTATION_NODE 35
notationName 64
notations 62
noWrap 113
NULL_NODE_ERR 285
numbers 168
object 103
open 72
options 82
orphans 197
outline 197
outlineColor 197
outlineStyle 198
outlineWidth 198
overflow 198
ownerDocument 37
ownerElement 51
ownerNode 120
ownerRule 126
padding 198
paddingBottom 199
paddingLeft 199
paddingRight 199
paddingTop 199
page 199
PAGE_RULE 129
pageBreakAfter 200
pageBreakBefore 200
pageBreakInside 200

parentNode 37, 259
parentRule 130, 136
parentStyleSheet 120, 130
pause 200
pauseAfter 201
pauseBefore 201
pitch 201
pitchRange 201
playDuring 201
playDuringIdentifier 164
playDuringType 163
position 202
predefinedCursor 163
prefix 38
preventBubble 216
preventCapture 216
preventDefault 216
previousNode 254, 260
previousSibling 37, 259
prevValue 240
primitiveType 139
PROCESSING_INSTRUCTION_NODE 35
ProcessingInstruction 64
profile 76
prompt 78
publicID 62
publicId 63, 64
quotes 202
Range 276
RangeException 285
readOnly 86, 88
Rect 146
red 146
referrer 71
rel 76, 97
relatedNode 222, 240
remove 82
removeAttribute 54
removeAttributeNode 55
removeAttributeNS 57
removeChild 40
removeEventListener 212
removeNamedItem 44
removeNamedItemNS 46
removeProperty 136
repeat 163
replaceChild 39
replaceData 49
reset 161, 81
rev 76, 98
RGBColor 146
richness 202
right 147, 202
rowIndex 111
rows 88, 106, 110, 114
rowSpan 113
rules 107
scheme 77
scope 113
screenX 221
screenY 222
scrolling 115, 116
sectionRowIndex 111
select 87, 89
selected 84
selectedIndex 81
selectNode 280
selectNodeContents 280
selectorText 130, 133
separator 147
setAngleValue 154
setAttribute 53
setAttributeNode 54
setAttributeNodeNS 58
setAttributeNS 56
setEnd 278
setEndAfter 279
setEndBefore 279
setFloatValue 142
setHeightSize 170
setHorizontalPosition 157
setHorizontalSpacing 160
setIdentifier 155, 171
setNamedItem 44
setPositionIdentifier 158
setProperty 137
setStart 277
setStartAfter 279
setStartBefore 278
setStringValue 143
setVerticalPosition 158
setVerticalSpacing 161
setWidthSize 170
shape 98, 104
sheet 123
shiftKey 222, 237
SHOW_ALL 252, 256
SHOW_ATTRIBUTE 252, 256
SHOW_CDATA_SECTION 252, 256
SHOW_COMMENT 252, 256
SHOW_DOCUMENT 252, 256
SHOW_DOCUMENT_FRAGMENT 252, 256
SHOW_DOCUMENT_TYPE 252, 256
SHOW_ELEMENT 252, 256
SHOW_ENTITY 252, 256
SHOW_ENTITY_REFERENCE 252, 256
SHOW_NOTATION 252, 256
SHOW_PROCESSING_INSTRUCTION 252, 256
SHOW_TEXT 252, 256
size 82, 86, 95, 96, 96, 203
span 109
speak 203
speakHeader 203
speakNumeral 203

speakPunctuation 203
specified 51
speechRate 204
splitText 60
src 86, 99, 105, 115, 116
standby 101
start 92
startContainer 277
startOffset 277
stress 204
style 131, 133, 133, 208
STYLE_RULE 129
StyleSheet 119
styleSheet 134
StyleSheetList 120
styleSheets 123
submit 80
substringData 47
summary 107
supports 41
surroundContents 283
SYNTAX_ERR 126
systemID 62
systemId 63, 64
tabIndex 82, 86, 88, 89, 98, 101, 104
tableLayout 204
tagName 53
target 65, 77, 78, 80, 98, 105, 216
tBodies 106
text 77, 79, 84, 105
Text 59
TEXT_NODE 35
textAlign 204
textDecoration 205
textIndent 205
textShadow 205
textTransform 205
tFoot 106
tHead 106
title 71, 75, 120
top 147, 205
toString 284
TreeWalker 256
type 77, 79, 81, 86, 87, 90, 91, 92, 93, 98, 101, 102, 105, 119, 129, 215
UIEvent 218
unicodeBidi 206
UNKNOWN_RULE 129
urange 168
uri 164, 167
uris 163
URL 71
useMap 86, 99, 101
vAlign 109, 110, 112, 114
value 51, 81, 84, 86, 88, 90, 93, 102
valueType 102, 138
version 75
vertical 165
verticalAlign 206
verticalIdentifier 156
verticalType 156, 159
view 219
ViewCSS 147
visibility 206
vLink 79
voiceFamily 206
volume 207
vspace 99, 101, 103
whatToShow 252, 256
whiteSpace 207
widows 207
width 94, 96, 99, 101, 103, 107, 109, 114, 116, 207
widthType 169
wordSpacing 207
write 72
writeln 72
WRONG_DOCUMENT_ERR 21
zIndex 208