

# Spatial Navigation on the Web

## TPAC 2018

Media & Entertainment Interest Group meeting

Jihye Hong (@LG Electronics)



# Overview

☐ Spatial Navigation

☐ Use Cases

☐ Spec

- Heuristic processing model
- API

☐ Next Steps

☐ Demo

# Spatial Navigation?

- ❑ Two-dimensional navigation within the pages of web app.
- ❑ Navigate around your pages in an intuitive and robust way in various devices. (TV, PC, IVI, etc)




TV Web Application




Grid-like Web Application


# Use Cases

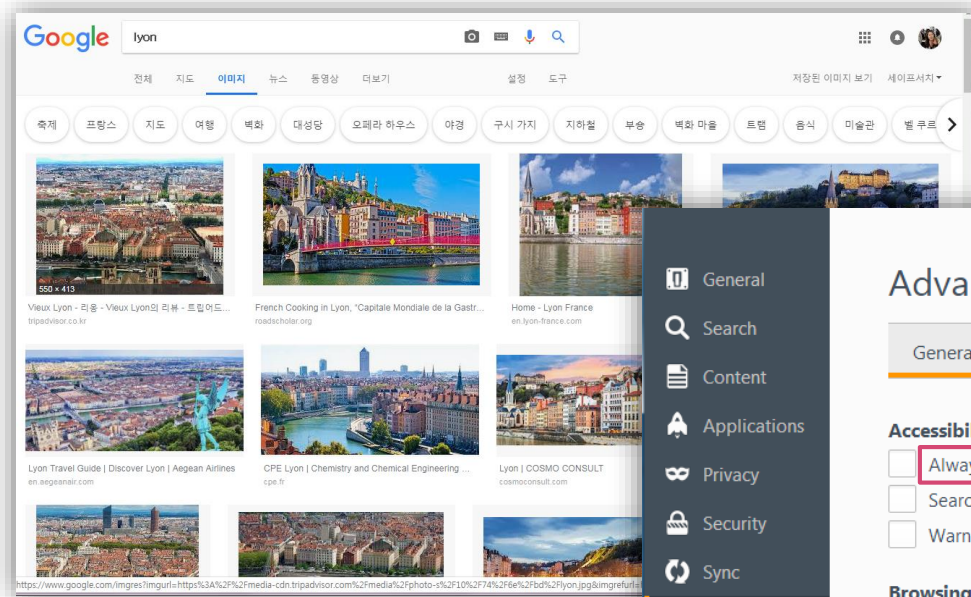

Google's Product  
(Image Search,  
Gmail,  
Google Docs)

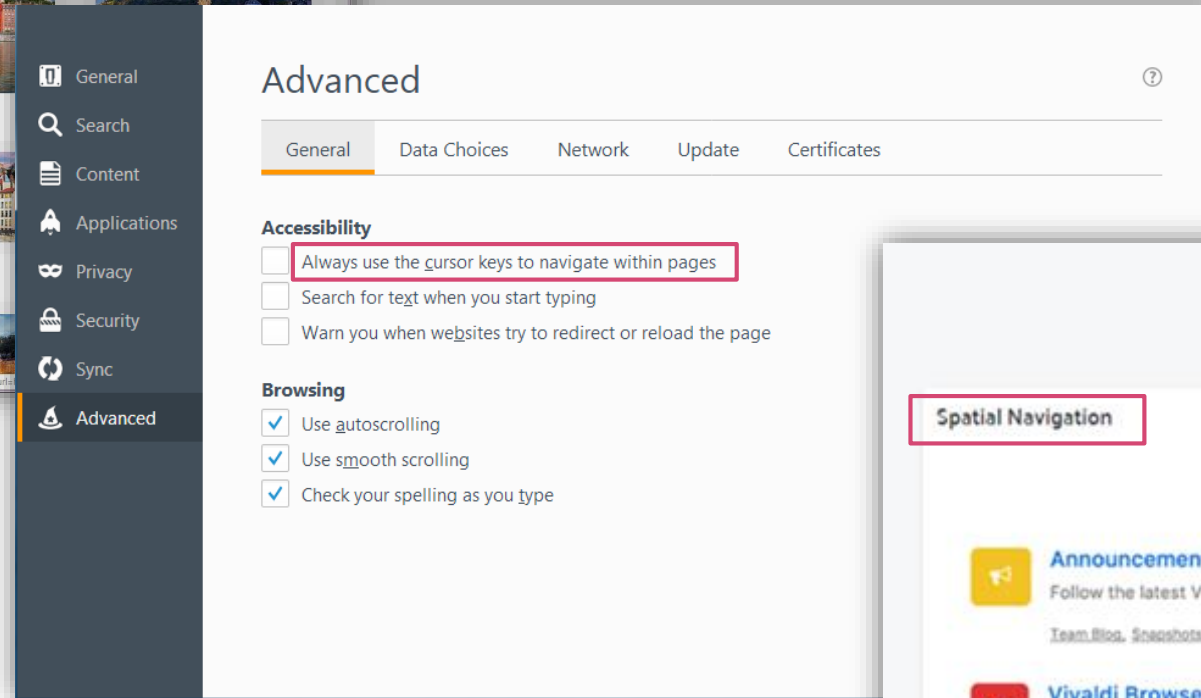

Directional Cursor Navigation  
in Firefox

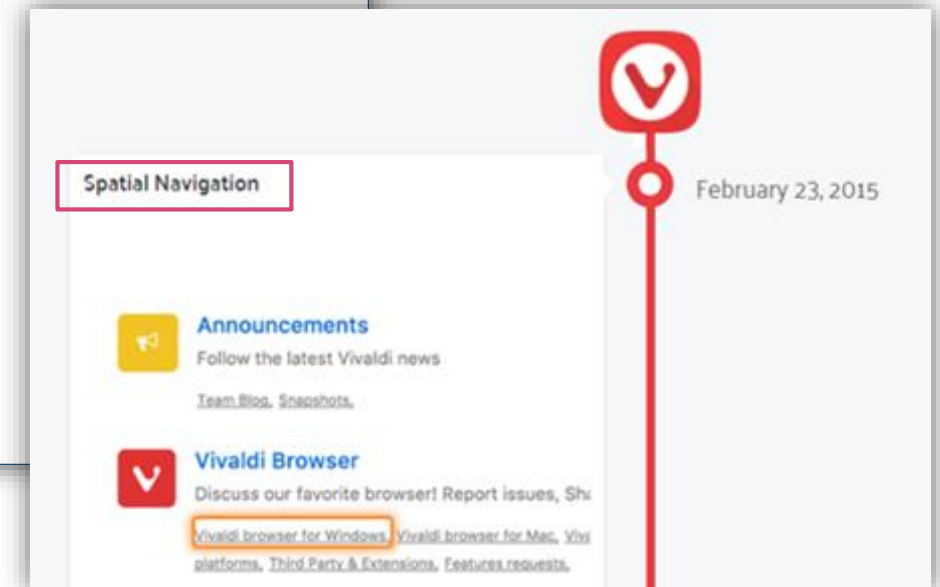

Spatial Navigation Feature  
in Vivaldi

# Use Cases

THE NETFLIX  
TECH BLOG

Follow

May 18, 2017 • 7 min read

## Pass the Remote: User Input on TV Devices

by [Andrew Eichacker](#)

The Netflix TV team works with device manufacturers to explore new input methods (like your phone!) and improve the screens we watch our favorite shows on. Beyond that, we're testing the boundaries for content discovery and playback while bringing Netflix to more users around the world.

BBC

Home

Getting Started ▾

Overview ▾

Widgets ▾

Other ▾

JS Doc

Testing

FAQ



## Focus Management

### Introduction

Spatial navigation (i.e. navigating around the UI via 5-point navigation) is handled for you by the framework if you make use of the *VerticalList*, *HorizontalList* and *Grid* widgets (or subclasses of them such as *HorizontalCarousel*).

- *VerticalList* consumes up and down key events, preventing bubbling of the event to the list's parent widget if it successfully moved the focus to the next/previous item in the list
- *HorizontalList* does the same for left and right key events
- *Grid* consumes all directional (up, down, left and right) key events

Events that are not consumed bubble up through the Widget tree (not the DOM), until a higher-level widget can consume them. By nesting both Vertical and Horizontal lists within each other, you can build up a complex UI.

For more details about events, please see the [Events](#) section.

Download ZIP

Download TAR

View on GitHub

Follow @BBCOpenSource

Tweet

build unknown

npm

spatial navigation

24 packages found

1

2

Sort Packages

Optimal

Popularity

Quality

Maintenance

Who's Hiring?

ClimaCell, Tinder, Airbnb and lots of other companies are hiring javascript developers.

See all 19 companies

### spatial-navigation-polyfill

A polyfill for the spatial navigation

spatial-navigation polyfill web

jhyerish published 1.0.0 • a month ago

### lrud

Left, Right, Up, Down. A spatial navigation library for devices with input via directional controls

tv navigation tv-apps react react-tv focus focus management spatial navigation smart tv

thunderchild15 published 2.6.0 • a month ago


### vue-spatialnavigation

Spatial navigation support for VueJS

vue spatial navigation navigation tv typescript keyboard vue-spatialnavigation

twcapps published 1.2.1 • 4 months ago

# History

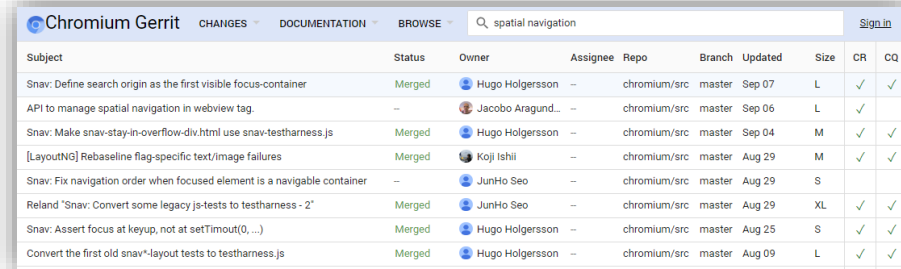

Chromium Gerrit interface showing a list of patches related to spatial navigation. The table includes columns for Subject, Status, Owner, Assignee, Repo, Branch, Updated, Size, CR, and CQ.

| Subject                                                                  | Status | Owner             | Assignee | Repo         | Branch | Updated | Size | CR | CQ |
|--------------------------------------------------------------------------|--------|-------------------|----------|--------------|--------|---------|------|----|----|
| Snav: Define search origin as the first visible focus-container          | Merged | Hugo Holgersson   | -        | chromium/src | master | Sep 07  | L    | ✓  | ✓  |
| API to manage spatial navigation in webview tag.                         | -      | Jacobo Aragund... | -        | chromium/src | master | Sep 06  | L    | ✓  | ✓  |
| Snav: Make snav-stay-in-overflow-div.html use snav-testharness.js        | Merged | Hugo Holgersson   | -        | chromium/src | master | Sep 04  | M    | ✓  | ✓  |
| [LayoutNG] Rebaseline flag-specific text/image failures                  | Merged | Koji Ishii        | -        | chromium/src | master | Aug 29  | M    | ✓  | ✓  |
| Snav: Fix navigation order when focused element is a navigable container | -      | JunHo Seo         | -        | chromium/src | master | Aug 29  | S    |    |    |
| Reland "Snav: Convert some legacy js-tests to testharness - 2"           | Merged | JunHo Seo         | -        | chromium/src | master | Aug 29  | XL   | ✓  | ✓  |
| Snav: Assert focus at keypad, not at setTimeout(0, ...)                  | Merged | Hugo Holgersson   | -        | chromium/src | master | Aug 25  | S    | ✓  | ✓  |
| Convert the first old snav*-layout tests to testharness.js               | Merged | Hugo Holgersson   | -        | chromium/src | master | Aug 09  | L    | ✓  | ✓  |

17.11

Introduce the  
Spatial Navigation  
@W3C TPAC 2017

18.04


Introduce  
Spatial Navigation  
Spec Draft  
@CSS WG F2F

18.08

Contribute patch (#8)  
to Chromium upstream  
about the Heuristic  
Behavior of  
Spatial Navigation

18.09


Release polyfill

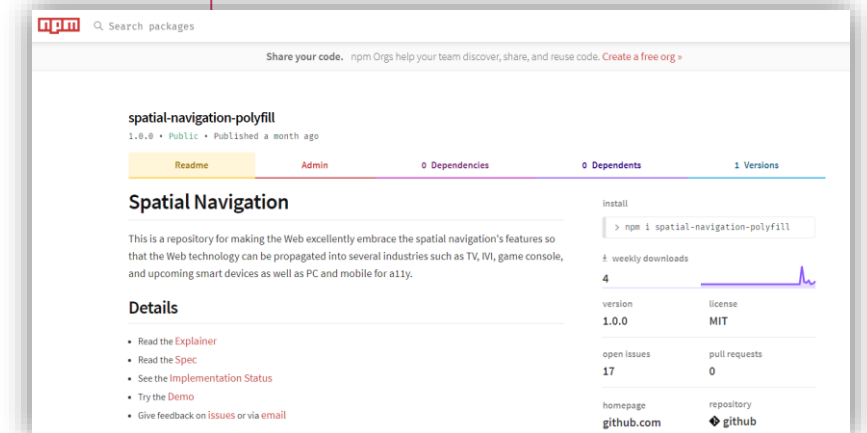


npm package page for spatial-navigation-polyfill. The page shows the package name, version (1.0.0), and a description: "This is a repository for making the Web excellently embrace the spatial navigation's features so that the Web technology can be propagated into several industries such as TV, IVI, game console, and upcoming smart devices as well as PC and mobile for a11y." It also includes a "Details" section with links to the explainer, spec, implementation status, demo, and feedback. The right sidebar shows installation instructions, weekly downloads (4), version (1.0.0), license (MIT), open issues (17), pull requests (0), homepage (github.com), and repository (github).

# Primitive Features



## Processing Model

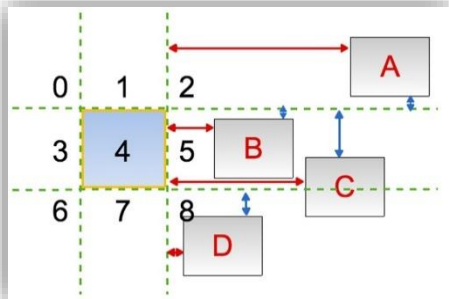

## Focusing Left via Spatial Navigation

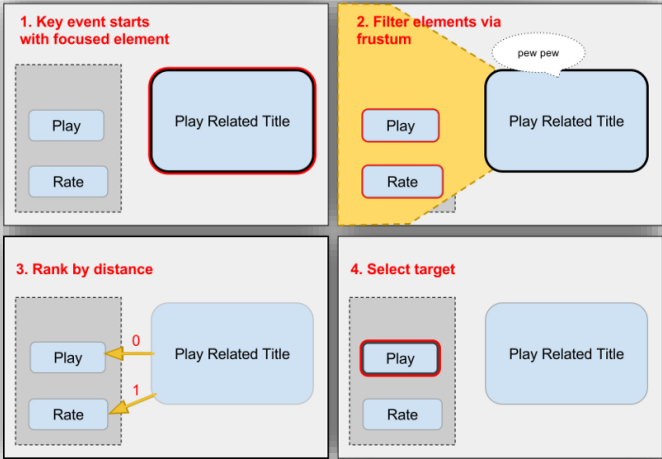

## APIs

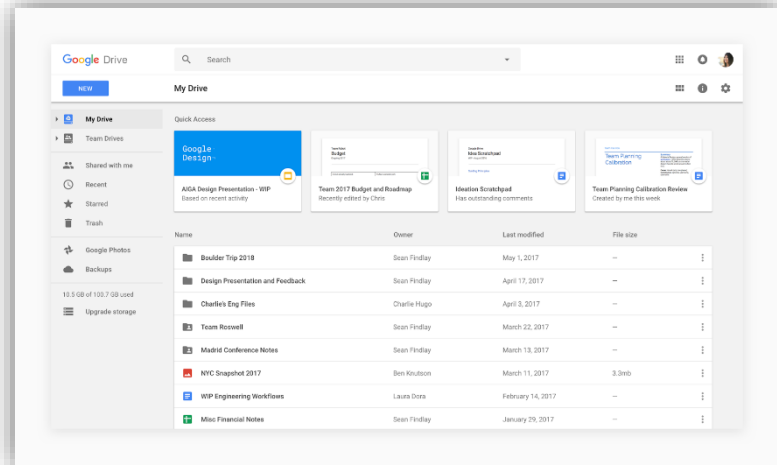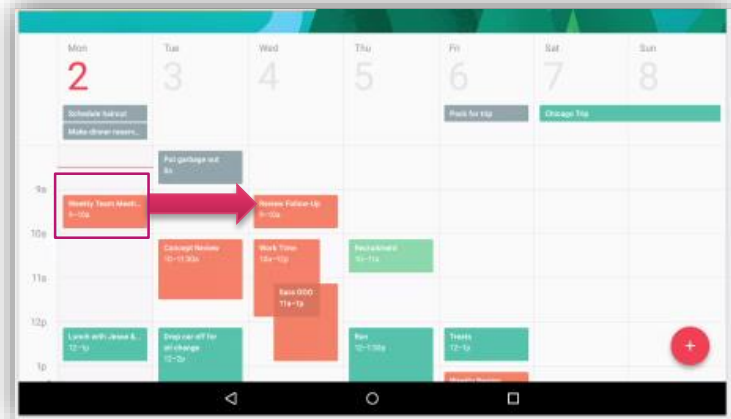

# Spatial Navigation in WICG

❑ Processing Model

❑ APIs

## TABLE OF CONTENTS

- 1 Introduction
- 2 Module interaction
- 3 Overview
- 4 Triggering Spatial Navigation
- 5 JavaScript API
  - 5.1 Triggering Navigation Programmatically
  - 5.2 Low level APIs
- 6 Navigation Events
  - 6.1 Interface NavigationEvent
  - 6.2 Navigation Event Types
    - 6.2.1 navbeforefocus
    - 6.2.2 navbeforescroll
    - 6.2.3 navnotarget
- 7 Processing Model
  - 7.1 Groupings of elements
  - 7.2 Navigation
  - 7.3 Focus Navigation Heuristics

## Spatial Navigation

Editor's Draft, 18 October 2018

### This version:

<http://wicg.github.io/spatial-navigation>

### Issue Tracking:

[GitHub](#)

[Inline In Spec](#)

### Editors:

[Jihye Hong](#) (LG Electronics)

[Florian Rivoal](#) (Invited Expert)

Copyright © 2018 the Contributors to the Spatial Navigation Specification, published by the [Web Platform Incubator Community Group](#) under the [W3C Community Contributor License Agreement \(CLA\)](#). A human-readable [summary](#) is available.

## Abstract

This specification defines a general model for navigating the focus using the arrow keys, as well as related CSS and JavaScript features.


## Status of this document

<https://wicg.github.io/spatial-navigation/>




# Basic Spatial Navigation Heuristics


1. Pressing  from an element

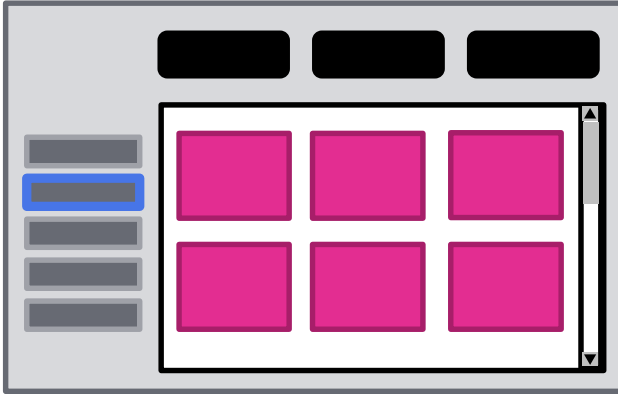


2. Find candidates

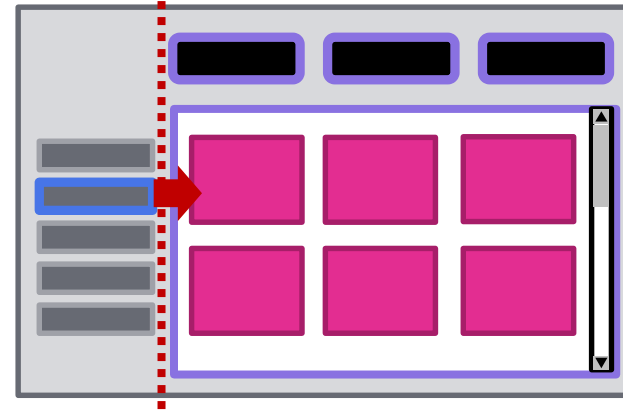

3. Select the best candidate

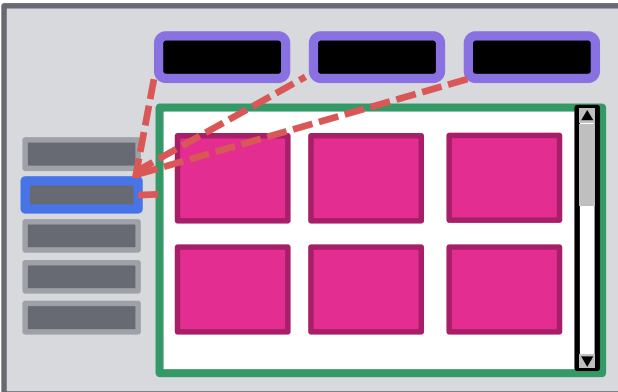


4. Focus the best candidate

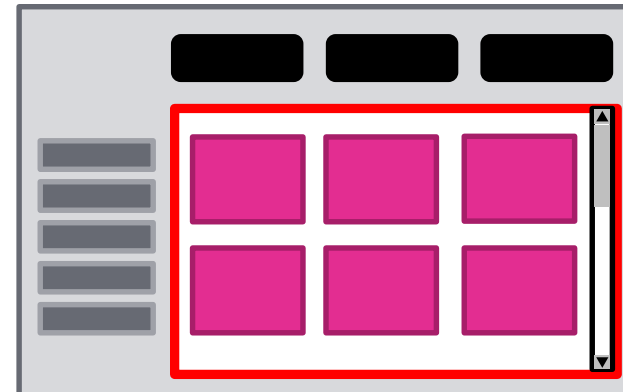


# Spatial Navigation Heuristic Behavior

## ❑ Combining the UA-defined arrow key behaviors


1. Box 3 gains the focus

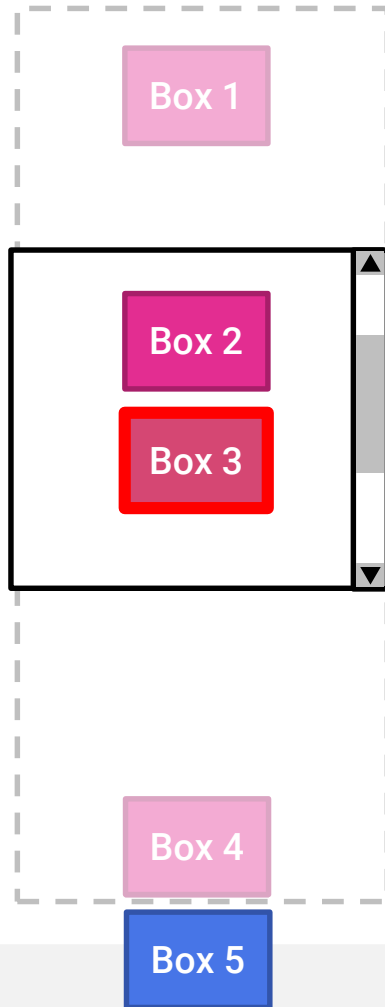

2. Pressing  triggers the scrolling

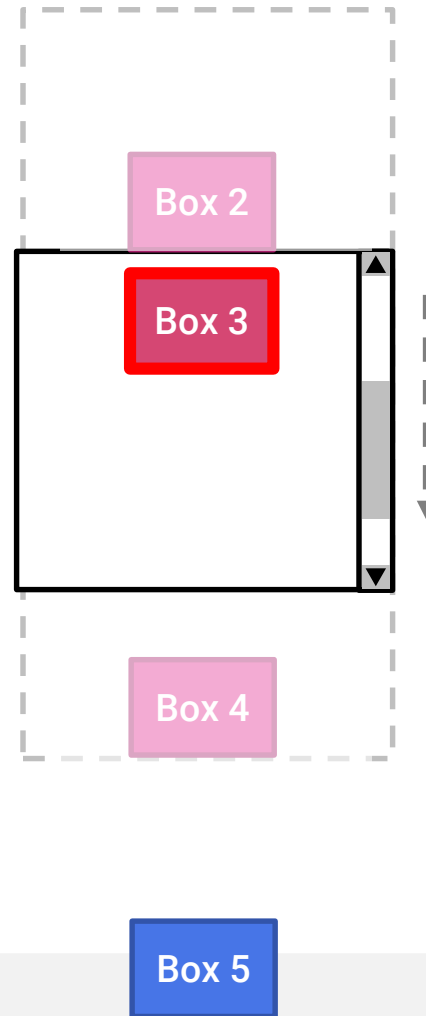


3. Box 4 gains the focus when it comes into the view

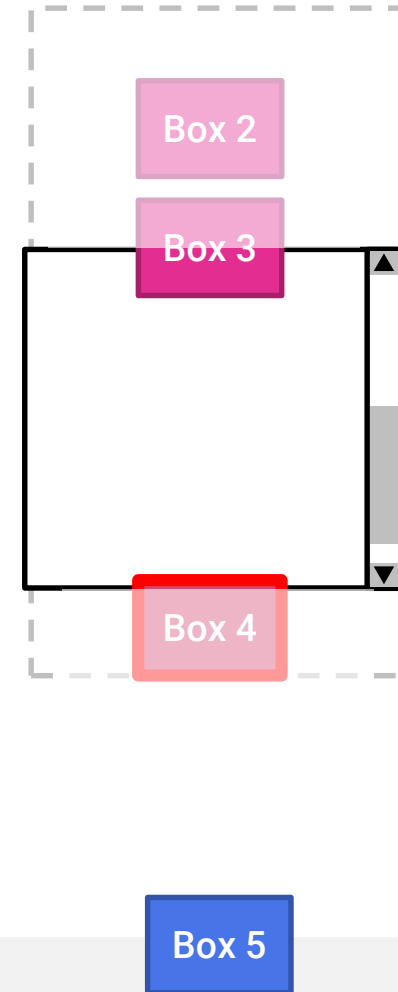


# Spatial Navigation Heuristic Behavior

## ❑ Combining the UA-defined arrow key behaviors

4. Pressing  moves down the scrollbar until the end

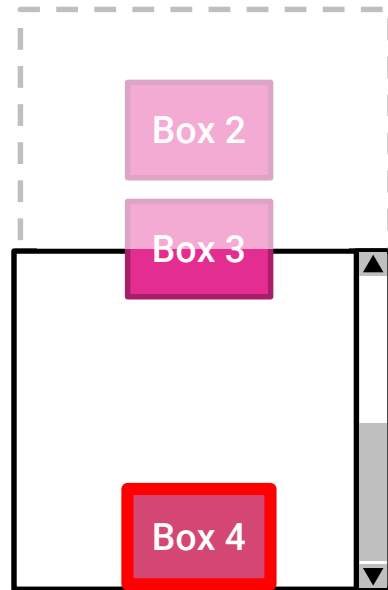

5. Pressing  moves the focus out of the scroll area and Box 5 gains the focus


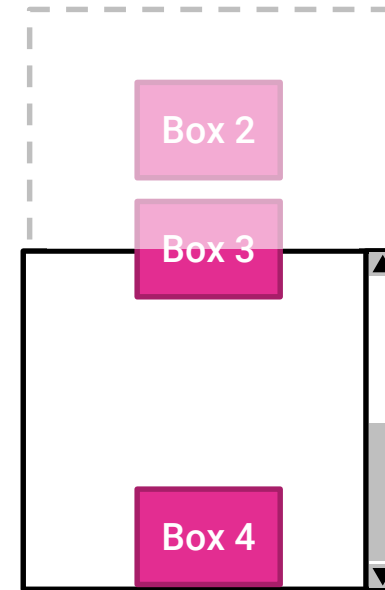


Box 5

Box 5

# APIs


- ❑ `window.navigate(direction)`
  - Mapping other key combinations

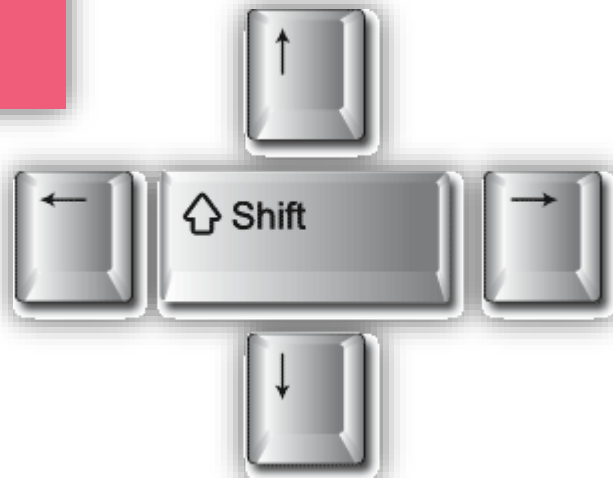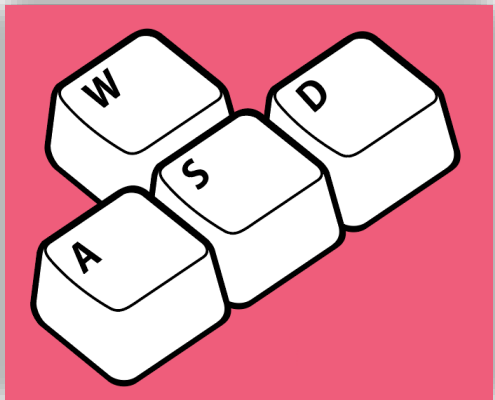


```
const redContainer = document.getElementsByClassName("container c1")[0];
redContainer.addEventListener('keydown', function(e) {
  const dir = WASD_KEY_CODE[e.keyCode];
  if(window.navigate && dir) {
    window.navigate(dir);
    e.preventDefault();
  }
}, true);
```

# APIs

- ❑ Apply other algorithm for finding the best target
  - focusableAreas(), spatialNavigationSearch(), getSpatialNavigationContainer()
  - Navigate Events
  - spatial-navigation-contain CSS property

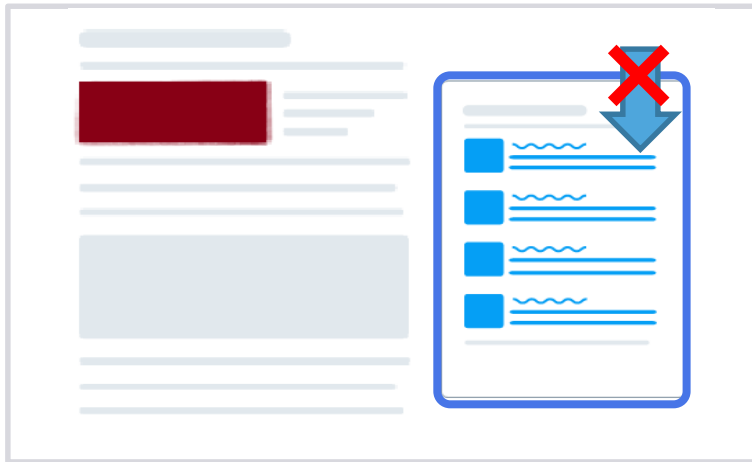

Infinite scroll

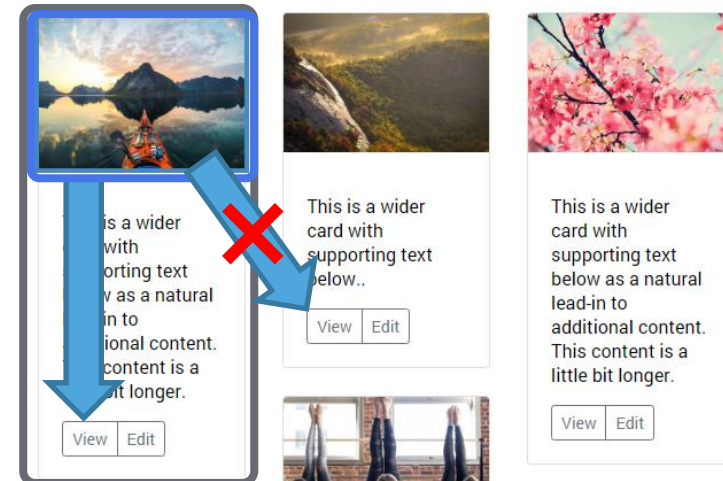

Grouped elements

## ❑ Apply other algorithm for finding the best target

- CSS UI nav-\* properties

- Auto

“The user agent determines which element to navigate the focus to in response to directional navigational input.”

Spatial Navigation Heuristics

§ 5.3. Keyboard control

§ 5.3.1. Directional Focus Navigation: the `'nav-up'`, `'nav-right'`, `'nav-down'`, `'nav-left'` properties

|                         |                                                                                                      |
|-------------------------|------------------------------------------------------------------------------------------------------|
| <i>Name:</i>            | <code>'nav-up'</code> , <code>'nav-right'</code> , <code>'nav-down'</code> , <code>'nav-left'</code> |
| <i>Value:</i>           | auto   <code>&lt;id&gt;</code> [ current   root   <code>&lt;target-name&gt;</code> ]?                |
| <i>Initial:</i>         | auto                                                                                                 |
| <i>Applies to:</i>      | all enabled elements                                                                                 |
| <i>Inherited:</i>       | no                                                                                                   |
| <i>Percentages:</i>     | N/A                                                                                                  |
| <i>Computed value:</i>  | as specified                                                                                         |
| <i>Canonical order:</i> | per grammar                                                                                          |
| <i>Animation type:</i>  | discrete                                                                                             |

<https://drafts.csswg.org/css-ui/#nav-dir>

# Try the Spatial Navigation!

 **Spatial Navigation Laboratory**

All demo pages support spatial navigation. Please use arrow keys for moving the focus. ☒

- Introduction
- Processing model
  - Default focus moving
  - Overflow regions
  - Scrollable region
  - <iframe> element
  - <input> elements
  - Spatnav container
- API Function
  - getSpatnavContainer
  - focusableAreas
  - spatNavSearch
  - navigate
- Web applications

This site aims to show several behaviors of spatial navigation using [a polyfill](#).

Please use only arrow keys with several shortcuts to navigate all pages.

Submit bug reports, requests and comments on [github issues](#).


## 1. Why spatial navigation?

[Introduction of spatial navigation](#)

## 2. Processing model

**\* Default focus moving behavior**

You can check the **default spatial navigation behavior using arrow keys**.

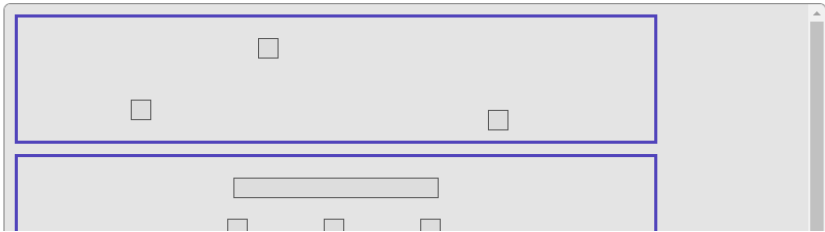

<https://wicg.github.io/spatial-navigation/demo/>

<https://www.npmjs.com/package/spatial-navigation-polyfill>

# Next Steps

## ❑ Implementation


- Google
  - Chromium Open Source, Accessibility
- Vewd
  - Chromium Patch and Spec Reviews
- Vivaldi
  - Investigating about applying the Spatial Navigation



# Next Steps

## ❑ Spec Extension

- Refining the Spec
- Handling the various focusable elements
- Managing the focus

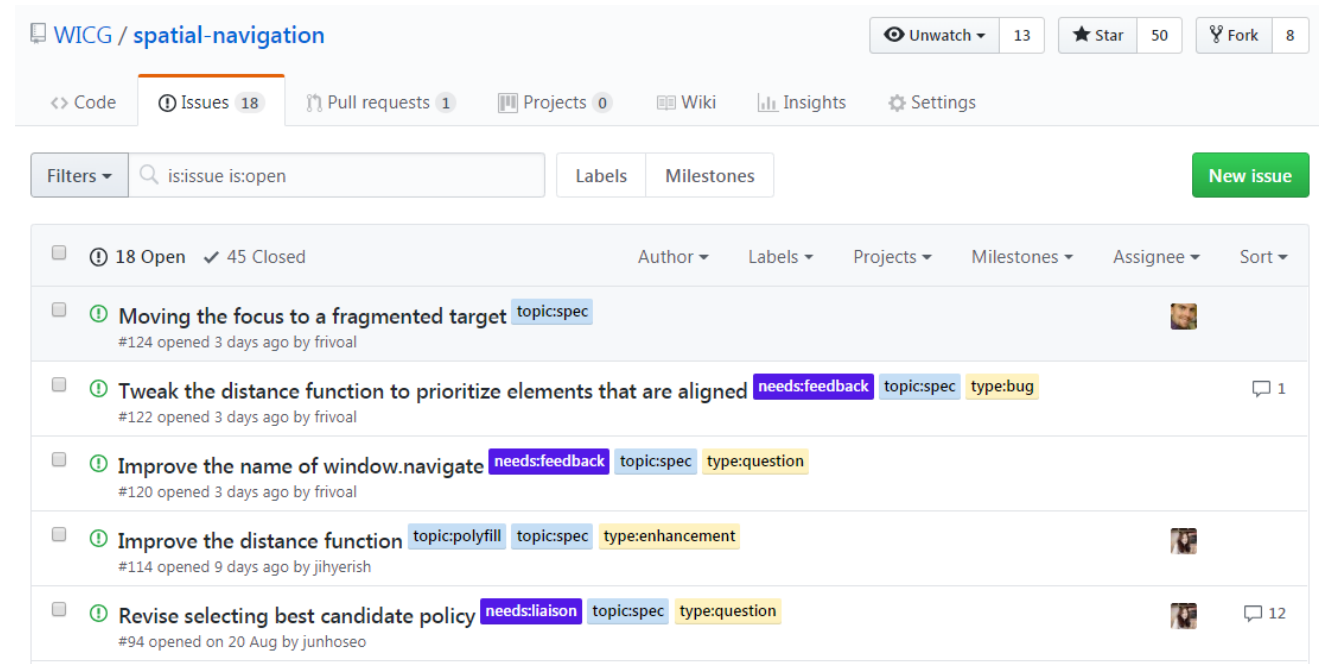

WICG / spatial-navigation

Unwatch 13 Star 50 Fork 8

Code Issues 18 Pull requests 1 Projects 0 Wiki Insights Settings

Filters is:issue is:open Labels Milestones New issue

| <input type="checkbox"/> | 18 Open ✓ 45 Closed                                                                                                                                                                       | Author | Labels | Projects | Milestones | Assignee | Sort |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|----------|------------|----------|------|
| <input type="checkbox"/> | <b>Moving the focus to a fragmented target</b> <span>topic:spec</span><br>#124 opened 3 days ago by frivoal                                                                               |        |        |          |            |          |      |
| <input type="checkbox"/> | <b>Tweak the distance function to prioritize elements that are aligned</b> <span>needs:feedback</span> <span>topic:spec</span> <span>type:bug</span><br>#122 opened 3 days ago by frivoal |        |        |          |            |          | 1    |
| <input type="checkbox"/> | <b>Improve the name of window.navigate</b> <span>needs:feedback</span> <span>topic:spec</span> <span>type:question</span><br>#120 opened 3 days ago by frivoal                            |        |        |          |            |          |      |
| <input type="checkbox"/> | <b>Improve the distance function</b> <span>topic:polyfill</span> <span>topic:spec</span> <span>type:enhancement</span><br>#114 opened 9 days ago by jihyerish                             |        |        |          |            |          |      |
| <input type="checkbox"/> | <b>Revise selecting best candidate policy</b> <span>needs:laison</span> <span>topic:spec</span> <span>type:question</span><br>#94 opened on 20 Aug by junhoseo                            |        |        |          |            |          | 12   |

<https://github.com/WICG/spatial-navigation/issues>

**Thank you! : )**

